



FAYETTEVILLE PUBLIC WORKS COMMISSION

PROCUREMENT DEPARTMENT

<https://www.faypwc.com/bids/>

Bid Addendum

PWC Number: PWC2223058

Bid Title : Big Rockfish Creek Outfall Contract II

Bid Opening Date and Time: August 3, 2023 @ 2:00 pm

Addendum Number: 4

Addendum Date: July 26, 2023

Procurement Advisor: Tanya Hazlett
Tanya.hazlett@faypwc.com



1. Return one properly executed copy of this addendum with bid response or prior to the Bid Opening Date/Time listed above.
2. The solicitation is hereby modified as follows:
 - M1. *Bidders are informed that bids were received for the Big Rockfish Creek Sanitary Sewer Outfall and Lift Station Elimination Outfall-Contract 2 on July 25, 2023 at 11:00 a.m., but the bids were not opened and were returned to the bidders since only two (2) bids were received. Pursuant to NCGS 143-129, a re-advertisement will be provided to re-bid the project. Bids will be received at the Administration Building, Fayetteville Public Works Commission, North Carolina, 955 Old Wilmington Road, Conference Room 107, Fayetteville, North Carolina, 28301, until 2:00 p.m., Thursday, August 3, 2023. Only those bids from bidders that attended the mandatory pre-bid conference for this project will be received and opened.*
 - M2. *Detail SS-3=Typical Trench Bottom and Backfill Detail for SDR 26 and C900 PVC Pipe per Addendum 3 shall be replaced in its entirety with the enclosed revised Detail SS-3. The revised detail shall become part of the details included in the issued for bid drawings.*
 - M3. *Bidders are hereby notified that placement of 12" clean fill and 4" of top-soil shall be provided in all locations where the pipeline (whether it is DI or PVC) traverses manicured/maintained lawns and sod will be placed.*

Failure to acknowledge receipt of this addendum may result in rejection of the response.

Check ONE of the following options:

- Bid has not been mailed. Any changes resulting from this addendum are included in our bid response.
- Bid has been mailed. No changes resulted from this addendum.
- Bid has been mailed. Changes resulting from this addendum are as follows:


Execute Addendum:

Offeror: _____

Authorized Signature: _____

Name and Titled (Typed): _____

Date: _____

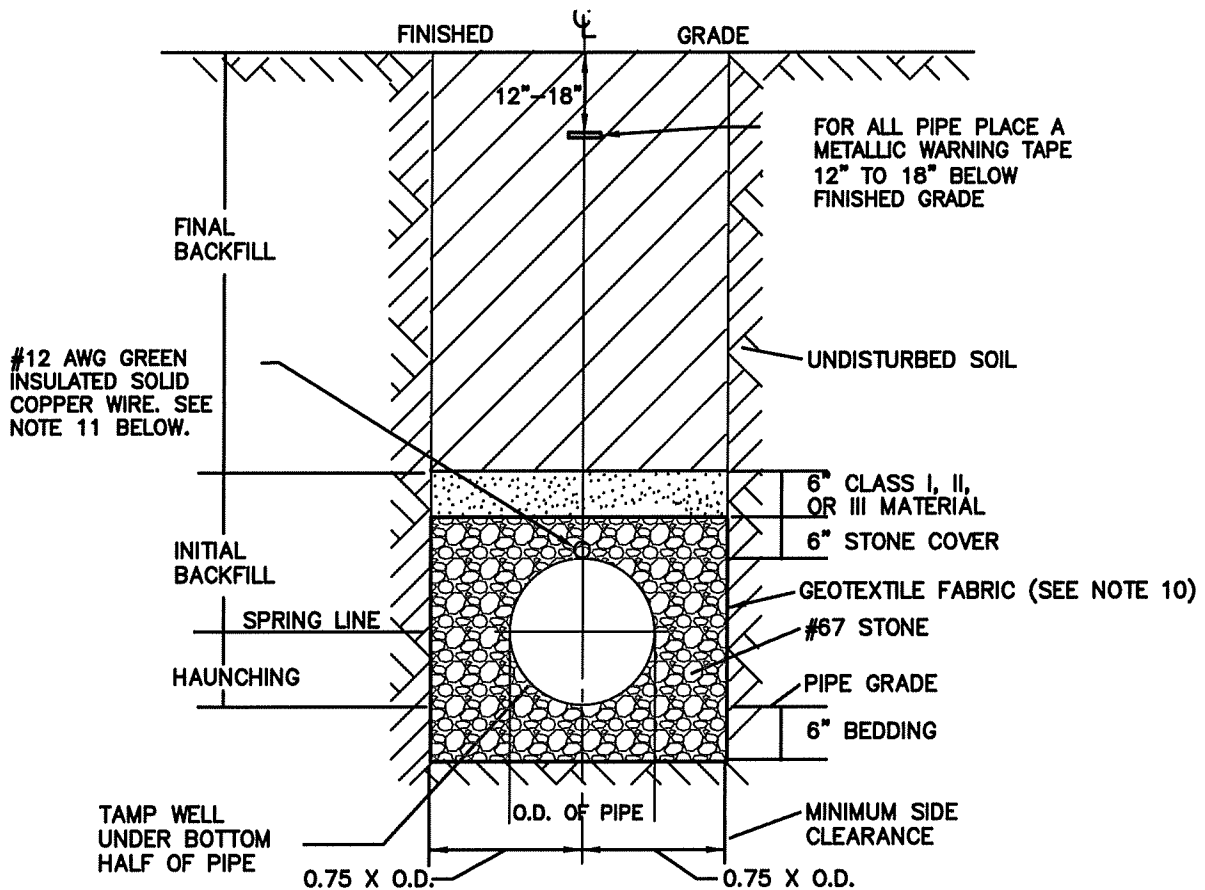

NOTES:

1. FOR TRENCHES REQUIRING SHORING AND BRACING, DIMENSIONS SHALL BE TAKEN FROM THE INSIDE FACE OF THE SHORING AND BRACING.
2. NO ROCKS OR BOULDERS 2" OR LARGER TO BE USED IN THE TOP 6" OF INITIAL BACKFILL AND NONE 6" OR LARGER IN FINAL BACKFILL.
3. FINAL BACKFILL SHALL BE SUITABLE NATIVE MATERIAL.
4. BACKFILL SHALL BE TAMPED IN 6" LIFTS IN TRAFFIC AREAS, 12" IN NON-TRAFFIC AREAS.
5. TOTAL TRENCH WIDTH SHALL BE A MINIMUM OF 1.5 X O.D. OF PIPE.
6. ACHIEVE 90% COMPACTION IN BEDDING, HAUNCHING AND INITIAL BACKFILL. SEE CONTRACT DOCUMENTS FOR COMPACTION REQUIREMENTS IN FINAL BACKFILL.
7. IF IN MAINTAINED/MANICURED LAWN OR WHERE SOD IS REQUIRED FOR RESTORATION, PROVIDE 4" TOPSOIL, AND 12" CLEAN SELECT FILL FOR FINAL DRESSING OF TRENCH BACKFILL.
8. CONTRACTOR SHALL UTILIZE METHODS NECESSARY TO MAINTAIN A FULL 6" OF STONE OVER THE PIPE FOLLOWING EXTRACTION OF TRENCH BOX AND/OR SHEETING.
9. CONTRACTOR SHALL ENSURE PIPE COUPLINGS/JOINTS ARE NOT DEFLECTED WHEN TWO PIPES ARE JOINED.
10. STONE BEDDING SHALL BE FULLY ENCLOSED IN A GEOFABRIC WRAP EXCEPT WHERE EMBEDMENT ZONE IS SURROUNDED BY TRENCH WALLS COMPRISED OF HARD ROCK. EMBEDMENT ZONE INCLUDES BEDDING BELOW PIPE TO 6" ABOVE TOP OF PIPE.
11. COPPER TRACING WIRE IS NOT REQUIRED FOR GRAVITY SEWER INSTALLATIONS. IT IS INTENDED FOR ONLY PVC PIPE THAT IS USED IN PRESSURE APPLICATIONS.

**SS-3 - TYPICAL TRENCH BOTTOM AND BACKFILL
DETAIL FOR SDR 26 AND C900 PVC PIPE
(SANITARY SEWER) REV PER ADDENDUM 4
N.T.S**