



**CONTRACT DOCUMENTS &
TECHNICAL SPECIFICATIONS**

PWC2627014

**TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM
STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD,
MCARTHUR ROAD, AND RIVER ROAD**

ISSUED FOR BID

SEPTEMBER 2026

**Fayetteville Public Works Commission
Administrative Building
955 Old Wilmington Road
Fayetteville, NC 28301**

TABLE OF CONTENTS

SECTION A – PROJECT SPECIFICS

General

Advertisement for Bids

00100 – Instructions to Bidders

Bid Submittal Documents

Bid Schedule – Performance and Delivery

Bid Checklist

00300 – Bid Pricing Form

Contractor Qualification Forms

Bid Supplemental Forms and Attachments

NC DWI MBE/WBE (DBE) Compliance Supplementals and Attachments

Economic Impact Disclosure Form

SECTION B – CONTRACT EXECUTION DOCUMENTS

Notice of Award

Acceptance of Award

Construction Agreement

PWC General Conditions

Contract Supplemental Forms and Attachments

Notice to Proceed

SECTION C – TECHNICAL SPECIFICATIONS

SCOPE OF WORK, SCHEDULE, MAPS

Attachment A: TOM STARLING

Attachment B: Bragg Boulevard

Attachment C: Tess-Dunn Road

Attachment D: McArthur Road

Attachment E: River Road

SECTION A – PROJECT SPECIFICS GENERAL

***** THIS PAGE WAS INTENTIONALLY LEFT BLANK *****

**ADVERTISEMENT FOR BID
FAYETTEVILLE PUBLIC WORKS COMMISSION
TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING, BRAGG
BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD**

**Cumberland County
North Carolina**

Pursuant to N.C.G.S 143-129, sealed bids are solicited and will be received at Fayetteville Public Works Commission, Administration Building, Conference Room 107, 955 Old Wilmington Road, Fayetteville, NC 28301, until **2:00 p.m., EST Thursday, October 8, 2026,** at which time they will be publicly opened and read.

This project involves the modernization and expansion of PWC's transmission and sub-transmission infrastructure through the replacement 291 existing wood and steel poles with new steel poles and the installation of 9 new steel transmission poles along a new right-of-way. The replacement projects involve 69kV sub-transmission lines with 15kV underbuilt distribution circuits and associated attachments, including PWC-owned fiber. The new construction project includes a 230kV transmission line with poles up to 100 feet in height.

The contractor shall provide all labor, equipment, materials, and traffic control necessary to perform the work, including but not limited to:

- Removal and disposal of existing wood poles and associated PWC hardware.
- Removal and return to inventory existing steel poles that are scheduled to be replaced.
- Installation of steel poles and all required transmission and distribution hardware.
- Transfer and reconnection of existing 69kV and 15kV conductors, as applicable.
- Installation of new 230kV facilities, including three (3) 954 conductors and one (1) 7#6 OHGW.

Project locations include:

- Tom Starling Road (NC-87 to I-95 BUS) – 102 pole replacements
- Bragg Boulevard (Filter Plant Drive to Barrington Cross Street) – 15 pole replacements
- PWC Right-of-Way (TESS Substation to Dunn Road) – 58 pole replacements
- McArthur Road (Duke Tap to POD V) – 9 new 230kV steel pole installations
- River Road (POD 2 to 401N Aeros Site) – 138 poles, to include the replacement of 109 wood & steel poles to steel poles. Replace existing 954 with new 1590.

The foregoing description shall not be construed as a complete description of all work required. All work shall be done in accordance with PWC technical specifications and standard contract terms.

The Owner reserves the unrestricted right, in its sole discretion and at any time before execution of the Contract, during performance of the Work, or thereafter as otherwise permitted by the Contract Documents, to add, delete, postpone, suspend, reorder, reconfigure, increase, decrease, or otherwise modify any portion of the Project, including without limitation any individual location, site, facility, work item, bid item, or portion thereof.

If the Owner elects to remove all or part of the Work associated with a particular location, bid item, or portion of the Project, the Contract Sum shall be reduced by the applicable lump-sum amount stated in the Bid for such location or item, or, if no separate price is stated, by an amount

reasonably determined by the Owner. Except as expressly authorized by the Owner in writing, the Contractor shall not be entitled to any increase in unit prices, lump-sum prices, overhead, profit, mobilization costs, general conditions costs, inefficiency costs, delay damages, consequential damages, loss-of-anticipated-profit damages, or other compensation arising from the deletion, reduction, postponement, suspension, or modification of any portion of the Work.

Bidders shall provide a separate and complete lump-sum price for each location identified in the Bid Schedule. Pricing shall not be contingent upon award of all locations, any minimum number of locations, any minimum Contract value, or any minimum quantity of Work.

By submitting a Bid, each Bidder acknowledges and agrees that the Owner may award the Contract for all locations, fewer than all locations, or any combination of locations, and may subsequently modify the scope of the Project. The Bidder further acknowledges and agrees that the prices submitted in its Bid shall remain valid and binding regardless of any such modification.

Award, if made, will be made to the lowest responsive, responsible bidder based upon the total evaluated Bid for all locations included in the Bid Schedule, provided, however, that the Owner reserves the right to award less than the entire Project and to modify the scope of the Project at any time as provided herein and in the Contract Documents.

The exercise of the Owner's rights under this Section shall not constitute a change entitling the Contractor to compensation except as expressly provided herein, and the Contractor expressly waives any claim arising from the Owner's deletion, reduction, postponement, suspension, resequencing, or non-performance of any portion of the Work.

A **MANDATORY** pre-bid meeting will be held at **10:00 a.m. EST Thursday, September 24, 2026, via web conference.** All potential bidders must email Nikole Bohannon, Procurement Manager at procurement@faypwc.com of their intent to attend, and to be added to the meeting. It is encouraged to utilize Microsoft Teams as this pre-bid meeting may contain a presentation of plans and an agenda. Should you need assistance accessing Microsoft Teams via web, smart phone, or tablet, please contact Nikole Bohannon via email at the email address listed above.

Questions will be fielded at the pre-bid meeting and all prospective bidders are required to attend the meeting. Individual telephone inquiries are prohibited. PWC assumes no responsibility to fully inform absentees of clarifications not issued by addendum.

PWC has received financial assistance under the Grid Resilience and Innovation Partnerships (GRIP) grant program. These programs include provisions that establish goals and other requirements relating to participation by certified Minority Business Enterprises (MBE)/Women Business Enterprises (WBE), compliance with wage rates as set forth under the Davis-Bacon Act, and any additional requirements such as those of the American Iron and Steel Act. The Bidder to whom the contract is awarded shall comply with all statutory and regulatory requirements of these provisions as specified within the contract documents.

All bidders are notified that the requirements of the GRIP program for participation by certified Minority and Women Business Enterprises in Construction, Procurement, and Professional Services shall be adhered to in the submission of all bids and shall be made a part of this contract.

Each bid valued \$500,000.00 or more shall be accompanied by a bid bond of five percent (5%) of the bid executed by a surety company licensed under the laws of North Carolina to execute the Contract in accordance with the bid bond and upon failure to forthwith make payment, the surety

shall pay the obligee an amount equal to the amount of said bond. Said deposit shall be retained by the Owner as liquidated damages in event of failure of the successful bidder to execute the Contract within ten (10) days after the Notice of Award or give satisfactory surety as required by law.

Performance and payment bonds are required (100% of bid amount) for contracts costing more than \$50,000 that are part of a project costing more than \$300,000.00.

All Contractors are notified that North Carolina Statutory provisions as to licensing of Contractors will be followed as applicable in receiving and evaluating bids and in reading and awarding the Contract (Chapter 87 of the North Carolina General Statutes).

The license classification shall be:

Part 1: Public Utilities Contractor PU (Electrical -Ahead of Point of Delivery)
 Specialty Contractor-PU (Electrical -Ahead of Point of Delivery)

Plans and Specifications including Contract Documents will be available online for viewing and downloading on or about **Tuesday, September 15, 2026**, on the PWC Procurement website at <https://www.faypwc.com/purchasing>. In addition, the documents will be available from the Fayetteville State University Construction Resource Office (FSU CRO) at <https://www.uncfsu.edu/academics/colleges-schools-and-departments/broadwell-college-of-business-and-economics/outreach-centers/construction-resource-office>.

At the FSU CRO, potential bidders may:

- Research, view and print project drawings to scale free of charge;
- Use available software to prepare their bid; and
- Receive certification and pre-qualification assistance.

Please email the FSU CRO to make an appointment: fsucro@uncfsu.edu

Fayetteville Public Works Commission reserves the right to reject any and all bids, to waive any and all informalities and irregularities, and to disregard all nonconforming, nonresponsive, or conditional bids. PWC further reserves the right to request additional information from any or all bidders for evaluation purposes; failure or refusal to furnish such information as requested may result in rejection of the bid.

The bid tabulation and announcement of the apparent low bidder at the bid opening do not constitute a binding contract with PWC. No contract will be considered awarded until a formal written Agreement is executed by both PWC and the successful bidder. The award of a contract, if made, will be to the lowest responsible, responsive bidder whose qualifications indicate the award will be in the best interest of PWC.

PWC also reserves the right, at its sole discretion, to re-advertise for bids if deemed in the best interest of PWC.

The bidder to whom the contract may be awarded must comply fully with the requirements of North Carolina General Statutes Section 143-129, as amended.

No bids may be withdrawn after the scheduled Bid Opening for a period of ninety (90) calendar days.

FAYETTEVILLE PUBLIC WORKS COMMISSION

Nikole Bohannon

Procurement Manager

00100 - INSTRUCTIONS TO BIDDERS
FAYETTEVILLE PUBLIC WORKS COMMISSION
TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING ROAD, BRAGG
BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

A. DEFINED TERMS

Terms used in these Instructions to Bidders are defined in the Definitions and Terminology sections of PWC General Conditions.

B. COPIES OF BIDDING DOCUMENTS

1. Complete sets of the Bidding Documents as stated in the Invitation to Bidders, may be obtained from the PWC Procurement Department.
2. Complete sets of Bidding Documents shall be used in preparing Bids. PWC assumes no responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bidding Documents.

C. EXAMINATION OF CONTRACT DOCUMENTS, OTHER RELATED DATA, AND PROJECT SITE

1. Before submitting a Bid, each Bidder shall (a) examine the Contract Documents thoroughly, (b) visit the site and become familiar with the site and any local conditions that may in any manner affect the cost, progress, or performance of the Work, (c) be familiar with federal, state and local laws, ordinances, rules and regulations that may in any manner affect cost, progress or performance of the Work, and (d) study and carefully correlate Bidder's observations with the Contract Documents, and (e) give the PWC Procurement Advisor written notice of all conflicts, errors or discrepancies in the Contract Documents.
2. Bidders should consult the Specifications for the identification of those reports of investigations and tests of subsurface and latent physical conditions at the site or reports that otherwise may affect cost, progress, or performance of the Work which may have been utilized in the preparation of the Drawings and Specifications. PWC will make copies of such reports if available at the cost (non-refundable) of reproduction to any Bidder requesting them. These reports are not intended to constitute any explicit or implicit representation as to the nature of the subsurface and latent physical conditions, which may be encountered at the site or to constitute explicit or implicit representations as to any other matter, contained in any report. Such reports are not guaranteed as to accuracy or completeness and are not part of the Contract Documents. Before submitting a Bid, each Bidder will, at its own expense, make such investigations and tests as the Bidder may deem necessary to determine his Bid for the performance of the Work in accordance with the Contract Documents.
3. On request (minimum 48 hours advance notice), PWC will provide each Bidder access to the site to conduct such investigations and tests, as each Bidder deems necessary for submission of its Bid.
4. The lands upon which the Work is to be performed, right-of-way for access thereto, and other lands available for use by the Contractor in performing the Work are identified in the

Contract Documents.

5. The submission of a Bid constitutes an incontrovertible representation by the Bidder that it has complied with every requirement of this Section and that the Contract Documents are sufficient in scope and detail to indicate and convey an understanding of all terms and conditions for the performance of the Work.

D. INTERPRETATIONS AND ADDENDA

1. All questions about the meaning or intent of the bid or Contract Documents shall be submitted in writing to Nikole Bohannon, Procurement Manager, by email to procurement@faypwc.com. In order to receive consideration, questions must be received no later than the date and time noted in the **Bid Schedule – Performance and Delivery**. Any interpretations of questions so raised, which in the opinion of the Project Engineer require interpretations, will be issued by Addenda via email or posted online by the Owner and/or Project Engineer. An Addendum extending the Bid Opening date may be issued up to five (5) business days before the Bid Opening date. An Addendum withdrawing the Invitation for Bid may be issued any time prior to the Bid Opening date. The Owner and Project Engineer will not be responsible for oral interpretations or clarifications, which anyone presumes to make on their behalf.

Bidders are expressly prohibited from contacting any PWC official or employee associated with this project, except as noted above. Violation of this prohibition is grounds for the immediate disqualification of the bidder.

2. PWC may issue such additional Addenda as may be necessary to clarify, correct, or change the Contract Documents. Such Addenda, if any, will be issued in the manner and within the time stated in Paragraph 1 of this Section.
3. Each Bidder shall be responsible for determining that all Addenda issued by PWC have been received before submitting a Bid for the Work.
4. Each Bidder shall acknowledge the receipt of each Addendum on the Bid Form.

E. VENDOR REGISTRATION VIA ISUPPLIER

1. All vendors interested in doing business with PWC must register as a vendor through the iSupplier Portal using the link below. The iSupplier self-service portal enables vendors to have real-time access to information regarding purchase orders, invoices, and payments through a secure environment. Attach a copy of your W9 to your online registration.

<https://www.faypwc.com/isupplier-doing-business-with-pwc/>

F. QUALIFICATION OF CONTRACTORS

1. **Bidder Qualification/Technical Form** – The Bid package shall include the completed Contractor Qualification Form and all supporting documentation.
2. **Statutory Requirements** – The Bidder shall comply with all federal, state, and local statutes, regulations, and codes as they relate to the Project. Failure to comply with these requirements shall be considered a breach of Contract.
3. Contractor to provide utility references for similar projects completed by identified crews.

4. PWC is looking for utility contractors with experienced personnel in all facets of water and/or sewer main replacement services. The minimum work experience of the following Personnel Classifications will be required:

- **Foreman/Crew Leader:** Must have a minimum of 5 years of experience as a foreman/crew leader, coordinating and supervising a team of crew members for replacing Distribution Poles between 40' and 60' in length. Should have experience reconductoring energized 15 KV and 25 KV distribution circuits up to 477 AAC
- **One (1) Journeyman ("A-Class" Lineman):** Must have a minimum of 5 years of experience at this classification replacing Distribution Poles between 40' and 60' in length. Should have experience reconductoring energized 15 KV and 25 KV distribution circuits up to 477 AAC.
- **One (1) "B-Class" Lineman:** Must have a minimum of 3 years of experience at this classification replacing Distribution Poles between 40' and 60' in length. Should have experience reconductoring energized 15 KV and 25 KV distribution circuits up to 477 AAC.
- **One (1) "C-Class" Lineman – Equipment Operator:** Must have a minimum of 2 years of experience at this classification replacing Distribution Poles between 40' and 60' in length. Should have experience reconductoring energized 15 KV and 25 KV distribution circuits up to 477 AAC.
- **Groundworkers:** Must have a minimum of 1 year of experience at this classification performing duties for OH Distribution Crews.

5. **Equipment Requirements (Minimum)**

- Two (2), Trucks, Pickup, 4x2
- Two (2), Bucket Trucks, capable of handling 110' poles
- Two (2), Digger Derricks, capable of handling up to a 110' wood, steel, or ductile iron Pole • Two (2), Pole Trailers, capable of handling up to a 110' pole.

Contractor will only be paid for equipment and tools in use on work-site.

G. SUBSTITUTE MATERIAL AND EQUIPMENT

The Contract, if awarded, will be on the basis of material and equipment described in the Drawings or required in the Specifications without consideration of possible substitute or "or-equal" items. The procedure for submittal of substitute or "or-equal" items for consideration is set forth in the PWC General Conditions.

H. CONTRACTOR'S LICENSE

1. No General Contractor shall engage in contracting work in the State of North Carolina unless it has been licensed under in accordance with North Carolina law.
2. Bidders are prohibited from contracting for, or bidding upon, the construction, removal,

repair or improvements to or upon real property owned, controlled or leased by Fayetteville Public Works Commission without a North Carolina Contractor's License.

3. Each bidder shall indicate its North Carolina Contractor's License number on the bid envelope and the Bid Form.
4. License Classification shall be:
 - Public Utilities Contractor-PU (Electrical – Ahead of Point of Delivery)
 - Specialty Contractor - PU (Electrical – Ahead of Point of Delivery)

I. SUBCONTRACTORS

1. Contractor shall subcontract no more than 49 percent (49%) of the value of the Contract.
2. Each Bidder shall submit to PWC with its bid the List of Subcontractors, Suppliers, other persons, and organizations proposed for those portions of the Work for which such identification is required. If PWC, after due investigation has reasonable objection to any

J. ECONOMIC IMPACT PROGRAM

1. Program Commitment: Fayetteville Public Works Commission (PWC) is committed to promoting the utilization of Small and Disadvantaged Business Enterprises (SDBEs) and Small Local Suppliers (SLS) in PWC's procurement of construction contracting. PWC seeks to provide equitable access and opportunity to qualified businesses across its operational areas.
 - The SDBE Program encourages participation from firms certified through recognized third-party agencies, NC Department of Transportation (DBE Program), and the U.S. Small Business Administration (SBA).
 - The SLS Program continues to promote engagement of small, local firms within the Fayetteville Metropolitan Statistical Area (MSA), consisting of Cumberland, Hoke, and Harnett Counties.
2. Certification and Verification: Certifications recognized under this program include:
 - NC Department of Transportation (NCDOT) Disadvantaged Business Enterprise (DBE)
 - U.S. Small Business Administration (SBA) certifications, including 8(a), WOSB, SDVOSB, and HUBZone designations. Firms holding current certifications with these agencies are acceptable for listing in the bidder's disclosure form.
 - NCDOT DBE Directory: <https://www.ebs.nc.gov/VendorDirectory>

K. GREATER FAYETTEVILLE CHAMBER OF COMMERCE

1. Members of the Greater Fayetteville Chamber of Commerce preferred but not required.

L. SUBMISSION OF BIDS

1. All Bidders shall use the enclosed Bid Forms, or exact copies thereof, in submitting their bid prices. Failure to provide full and complete Bid Forms using the form provided herein will result in a bid being deemed non-responsive.

2. PWC will not accept modified Bid Forms, oral Bids, or Bids received by telephone, email, or telecopier (FAX machine) for this Bid.
3. All prices must be F.O.B. delivered to the point as indicated by this Bid. PWC will grant no allowance for boxing, crating, or delivery unless specifically provided for in this Bid.
4. The Bid Form must be completed in black ink. Black or blue pen ink is acceptable if handwritten.
 - A. Discrepancies between amounts shown in words and amounts shown in figures will be resolved in favor of the amounts shown in words.
 - B. If the Bid Form requires unit prices and extended prices, the extended price for each line item shall be calculated by multiplying the bidder's submitted unit price by the quantity identified in the Bid Form.
 - C. PWC will prepare a bid tabulation using the quantities identified in the Bid Form and the unit prices submitted by each bidder. PWC will verify the bidder's extended price for each line item by multiplying the bidder's submitted unit price by the applicable quantity. PWC will not modify or adjust a bidder's submitted unit price.
 - D. For Bid Forms containing multiple line items, the total tabulated bid price shall be determined by summing the tabulated extended prices for all line items.
 - E. The bidder's submitted unit price shall govern for each line item. In the event of a discrepancy between a bidder's submitted extended price, subtotal, total bid price, bid opening announcement, or other bidder-calculated totals and the tabulated bid price calculated using the bidder's submitted unit prices and the quantities identified in the Bid Form, the tabulated bid price shall control for bid tabulation, evaluation, responsiveness determinations, and award recommendation purposes.
 - F. Mathematical errors in the calculation of extended prices, subtotals, column totals, or grand totals shall not result in an adjustment to the bidder's submitted unit prices.
5. Discrepancies between amounts shown in words and amounts shown in figures will be resolved in favor of the amounts shown in words. Discrepancies in the multiplication of units of Work and the unit prices will be resolved in favor of the correct multiplication of the unit prices. Discrepancies between the indicated sum of any column of figures and the correct sum thereof will be resolved in favor of the correct sum.
6. Bid submittals sent by mail should be registered mail. The sealed Bid, marked as indicated above, should be enclosed in an additional sealed envelope similarly marked and addressed to:

Fayetteville Public Works Commission
Attn: Nikole Bohannon, Procurement Manager
955 Old Wilmington Road
Fayetteville, North Carolina 28301

7. Mark the envelope in the lower left-hand corner with the project title, hour and due date of Bid, and the Bidder's North Carolina contractor registration number.
8. Bids sent by mail and arriving after the time for the opening of Bids shall not be considered valid Bids. In such instances, the Bidders shall have no claim against PWC.
9. All items contained in the Bid Checklist shall be completely filled out and submitted with the bid. Failure to submit any of the items requested with the Bid Form may be just cause for rejection of the Bid by PWC.
10. All erasures, insertions, additions, and other changes made by the Bidder to the Bid Form shall be signed or initialed by the Bidder. Bids containing any conditions, omissions, erasures, alterations, or items not called for in the Bid, may be rejected by PWC as being incomplete or nonresponsive.
11. The Bid Form must be signed in order to be considered. If the Bidder is a corporation, the Bid must be submitted in the name of the corporation, not simply the corporation's trade name. In addition, the Bidder must indicate the corporate title of the individual signing the Bid.
12. The Bid Form, the Bid security, if any, and any other documents required, shall be enclosed in a sealed opaque envelope. Any notation or notations on the exterior of the envelope purporting to alter, amend, modify, or revise the bid contained within the envelope shall be of no effect and shall be disregarded.
13. All Bids received in the Procurement Department by the deadline indicated will be kept sealed until the time and date of the Bid Opening.
14. All late Bids shall be returned unopened to the sender.

M. BID BOND

1. Each Bid shall be accompanied by an acceptable Bid bond in the amount of five percent (5%) of the Bid amount, and made payable to Fayetteville Public Works Commission, North Carolina.
2. The Bid bond is a guarantee that if the contract is awarded by PWC to the Bidder, the Bidder shall enter into the contract with PWC for the work mentioned in this Bid or forfeit the Bid bond to PWC, not as a penalty, but as liquidated damages.
3. No forfeiture under a Bid bond shall exceed the lesser of (a) the difference between the Bid for which the Bid bond was written and the next low Bid of another Bidder, or (b) the face amount of the Bid bond.
4. All bonds shall be executed by a surety company selected by the Bidder, which is legally authorized to do business in the State of North Carolina (NCGS §44 A-26), and the bond shall be the same in both form as well as substance as AIA Document A310, Bid Bond.
5. The Bidder shall require the attorney-in-fact, who executed the required bond on behalf of the surety company, to affix thereto a certified and current copy of the power of attorney.
6. The bond premium shall be paid by the Bidder and the cost shall be included in the Bid price.

7. Any inspection of procurement transaction records shall be subject to reasonable restrictions to ensure the security and integrity of the records.

N. OPENING OF BIDS

1. Bids will be opened publicly and read aloud on the date and time set for the Bid Opening in the Notice to Bidders.
2. Any Bidder, upon request, shall be afforded the opportunity to inspect Bid records within a reasonable time after the opening of all Bids but prior to award, except in the event that PWC decides not to accept any of the Bids and to reopen the contract. Otherwise, bid records shall be open to public inspection only after the award of the Contract.
3. Any inspection of procurement transaction records shall be subject to reasonable restrictions to ensure the security and integrity of the records.

O. MODIFICATION OF BIDS

1. A Bid may be modified or withdrawn by the Bidder at any time prior to the time and date set for the Bid Opening. The Bidder shall notify the PWC Procurement Department in writing of its intentions.
2. Modified and withdrawn Bids may be resubmitted to the PWC Procurement Department up to the time and date set for the Bid Opening.

P. WITHDRAWAL OF BID DUE TO ERROR

1. If the Bidder desires to withdraw its Bid, the Bidder must do so before the time fixed for the opening, without prejudice, by communicating its purpose in writing to PWC. After bids are open, bids may only be withdrawn in strict accordance with N.C.G.S. Section 143-129-1.

Q. BIDS TO REMAIN OPEN

1. All Bids shall remain open for ninety (90) calendar days after the day of the Bid Opening.

R. ESTIMATED QUANTITIES

1. The estimated quantities contained herein in certain items in the Bid are for the purpose of comparing bids, and while they are believed to be close approximations, they are not guaranteed, and settlement will be made on the basis of the work as actually executed at the unit prices in the Bid as accepted. PWC further reserves the right to delete any single line item or combination of items from the bid and cannot guarantee that all quantities listed in the Contract Documents will be utilized.
2. The Contractor should verify quantities before submitting a bid. Due to conditions that may be found under pavement such as the accurate location of existing water lines, sewer lines, gas lines, and structure services of all types, quantities are subject to change during construction, but this contingency shall not be used for a claim to change unit prices submitted in the Bid.

S. AWARD OF CONTRACT

1. PWC reserves the right to reject any and all bids, to waive any and all minor informalities and irregularities, and to disregard all nonconforming, nonresponsive, or conditional bids. PWC further reserves the right to request additional information from any or all bidders for evaluation purposes; failure or refusal to furnish such information as requested may result in rejection of the bid. The bid tabulation and announcement of the apparent low bidder at the bid opening do not constitute a binding contract with PWC. No contract will be considered awarded until a formal written Agreement is executed by both PWC and the successful bidder. The award of a contract, if made, will be to the lowest responsible, responsive bidder whose qualifications indicate the award will be in the best interest of PWC. PWC also reserves the right, at its sole discretion, to re-advertise for bids if deemed in the best interest of PWC.
2. In case of a tie Bid, the tie shall be decided by lot.
3. It is the intent of PWC to recommend the award of this contract to the lowest responsive, responsible Bidder provided the Bid has been submitted in accordance with the requirements of the Bidding Documents and does not exceed the funds available. In determining the lowest responsible Bidder, PWC may consider, among other criteria, the Bidder's past performance conduct on other contracts, and other information provided by the Bidder as noted below.
4. In determining the lowest responsive Bidder, PWC will evaluate the Bidder's proposed Bid price and the completeness of the submitted bid in accordance with the requirements of the Contract Documents.
5. PWC may consider the operating costs, maintenance considerations, performance date, and guarantees of materials and equipment.
6. PWC may conduct such investigations as deemed necessary to assist in the evaluation of any Bid and to establish the responsibility, qualifications and financial ability of the Bidders, as well as other considerations, to include but not limited to resources available to the Bidder to perform the work effectively, proposed Subcontractors and other persons and organizations to do the work in accordance with the Contract Documents to PWC's satisfaction within the prescribed time.
7. PWC reserves the right to reject the Bid of any Bidder who does not pass any such evaluation to PWC's satisfaction.
8. If the Contract is to be awarded, PWC will give the Successful Bidder a Notice of Award within ninety (90) days after the day of the Bid Opening.
9. The Bidder to whom the contract is awarded shall, within ten (10) days after prescribed documents are presented for signature, execute and deliver the Contract Documents and any other forms or bonds required by the Bid to PWC.

10. The Bidder is required to complete the attached forms that will allow PWC to verify that the Bidder is qualified to perform the Work described in these Contract Documents. All forms shall be completed and submitted with the Bid. Failure to submit all the required forms shall be considered grounds for PWC to reject the bid.

PWC will review all of the bids and qualification data to determine the lowest responsive, responsible Bidder. PWC reserves the right to not award the Contract to the lowest bidder if the information provided is not complete, does not meet the satisfaction of PWC, or has been falsified. PWC will not request any additional information in order to allow the Contractor to complete bid.

11. During the evaluation phase, bid submittals will be reviewed to ascertain which bids technically and otherwise address all the requirements of these Contract Documents. Bid submittals determined to be technically non-responsive or not sufficiently responsive may be disqualified.

The Bidder shall address each of the Evaluation Criteria as requested in the Technical Evaluation Criteria Form located within Section A Project Specifics Bid Submittal Documents. To be considered substantive, the information must respond to all requirements.

12. PWC may conduct such investigations/verifications as deemed necessary to establish the responsibility, qualification and financial ability of the Bidder. Should PWC find that the apparent low bidder is not the lowest responsive, responsible bidder by integrity of the information furnished, said apparent low bidder will be so notified and its bid bond shall be returned without prejudice. Failure or refusal to furnish any items of information requested by PWC shall be considered as non-responsive and therefore basis for rejection of the bid.

T. TAXES

1. The Successful Bidder shall pay all county, city, state and federal taxes required by laws in effect at the time Bids are received and resulting from the Work or traceable thereto, under whatever name levied.
2. Said taxes shall not be in addition to the contract price between PWC and the Successful Bidder. The taxes shall be an obligation of the Successful Bidder and not of PWC. PWC shall be held harmless from same by the Successful Bidder.

U. PERFORMANCE AND OTHER BONDS

1. The PWC General Conditions set forth PWC's requirements as to Performance and other Bonds.

V. E-VERIFY REQUIREMENTS

1. Contractor hereby acknowledges that "E-Verify" is the federal E-Verify program operated by the US Department of Homeland Security and other federal agencies which is used to verify the work authorization of newly hired employees pursuant to federal law and in accordance with Article 2, Chapter 64 of the North Carolina General Statutes.

2. Contractor further acknowledges that all employers, as defined by Article 2, Chapter 64 of the North Carolina General Statutes, must use E-Verify and after hiring an employee to work in the United States, shall verify the work authorization of the employee through E-Verify in accordance with NCGS §64-26(a).
3. Contractor hereby pledges, attests and warrants through execution of this Agreement that Contractor complies with the requirements of Article 2, Chapter 64 of the North Carolina General Statutes and further pledges, attests and warrants that any subcontractors currently employed by or subsequently hired by Contractor shall comply with any and all E-Verify requirements. Failure to comply with the above requirements shall be considered a breach of this Agreement.

W. IRAN DIVESTMENT ACT

1. As mandated by N.C.G.S. 147-86.59(a), the Contractor hereby certifies that it is not listed on the Final Divestment List created by the North Carolina State Treasurer pursuant to N.C.G.S. 147-86.58. Contractor further certifies that in accordance with N.C.G.S. 146-86.58(b) that it shall not utilize any subcontractor found on the State Treasurer's Final Divestment List. Contractor certifies that the signatory to this Purchase Order authorized by the Contractor to make the foregoing statement.

*** END OF SECTION ***

SECTION A – PROJECT SPECIFICS BID SUBMITTAL DOCUMENTS

**BID SCHEDULE – PERFORMANCE AND DELIVERY
FAYETTEVILLE PUBLIC WORKS COMMISSION
TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING,
BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND
RIVER ROAD**

Virtual Pre-Bid Meeting:	10:00 a.m., September 24, 2026
(MANDATORY)	Via Microsoft Teams
Deadline for Questions from Bidders ¹	4:00 p.m., September 29, 2026
Deadline for Addenda issued by PWC Procurement Department and Project Engineer ²	5:00 p.m., October 1, 2026
Bid Opening (Submittal Deadline)	2:00 p.m., October 8, 2026 Fayetteville Public Works Commission Administrative Building Conference Room 107 955 Old Wilmington Road Fayetteville, NC 28301
Target Commission Meeting	October 28, 2026
Target City Council Meeting	November 9, 2026
Contract Time:	930 Calendar days
Liquidated Damages:	\$1,000.00 per day for each day beyond the Final Completion Date
Bid Acceptance Period	Within ninety (90) Calendar Days unless otherwise noted

-
1. Questions regarding this bid must be submitted in writing to the attention of Nikole Bohannon, Procurement Manager, by email to procurement@faypwc.com.

Bidders are expressly prohibited from contacting any FPWC official or employee associated with this Invitation to Bid, except as noted above. Violation of this prohibition is grounds for the immediate disqualification of the bidder.

2. Any addenda to these Contract Documents will be issued by the Project Engineer no later than the date and time stated above.

BID SUBMITTAL CHECKLIST

- ☐ 1. Enter Contractor's License Number where called for in the Bid Form and on the outside of the sealed envelope containing the Bid.
- ☐ 2. Photocopy of Contractor's License.
- ☐ 3. Bid Forms Section 00300.
- ☐ 4. Provide the responsible North Carolina Registered Agent for Insurance Claims. Include contact information.
- ☐ 5. Bid Bond, if applicable.
- ☐ 6. Power of Attorney
- ☐ 7. Provide the proposed responsible Bonding Company name. Include contact information.
- ☐ 8. List of proposed Subcontractors and material suppliers exceeding 5% of the Contract Value.
- ☐ 9. Non-Collusive Affidavit.
- ☐ 10. Nondiscrimination Clause.
- ☐ 11. Affidavit of Organization and Authority and Sworn Statement.
- ☐ 12. Equal Employment Opportunity Acknowledgment.
- ☐ 13. Certification regarding Debarment, Proposed Debarment, and other Responsible Matters.
- ☐ 14. FTA Certification Regarding Lobbying.
- ☐ 15. NC DWI MBE/WBE (DBE) Compliance Supplementals and Attachments
- ☐ 16. Economic Disclosure Form.
- ☐ 17. The Completed Contractor Qualification Form.

****FAILURE TO SUBMIT THE ABOVE FORMS WITH THE BID FORM PROVIDED HEREIN MAY
BE JUST CAUSE FOR REJECTION OF THE BID BY THE OWNER****

***** THIS PAGE INTENTIONALLY LEFT BLANK *****

00300 - BID FORM

TO: **Fayetteville Public Works Commission**
Attn: Nikole Bohannon, Procurement Manager
955 Old Wilmington Road
Fayetteville, North Carolina 28301

PROJECT: **PWC2627014 – TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING ROAD, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD**

FROM: BIDDER _____

ADDRESS _____

DATE OF BID _____, 20 _____

- A. The undersigned BIDDER proposes and agrees, if this Bid is accepted, to enter into a Contract with OWNER in the form included in the Contract Documents to perform and furnish all Work (as that term is defined in the Construction Agreement) specified or indicated in the Contract Documents for the Contract Price and within the Contract Time indicated in this Bid and in accordance with the Contract Documents.
- B. BIDDER accepts all of the terms and conditions of the Instructions to Bidders, including, without limitation, those dealing with the disposition of payment and performance bonds, and insurance certificates. This bid will remain open for ninety (90) calendar days after the day of Bid opening. BIDDER will sign the Contract and submit the Contract Security and other documents required by the Contract Documents within ten (10) days after the date of receipt by the BIDDER.
- C. In submitting this Bid, Bidder represents, as more fully set forth in the Contract, that:
1. BIDDER has examined copies of all the Contract Documents and of the following addenda, receipt of all which is acknowledged on the bid summary page:
 2. BIDDER has examined the site and locality where the Work is to be performed, the legal requirements (federal, state, and local laws, ordinances, rules and regulations) and the conditions affecting cost, progress of performance of the work and has made such independent investigations as BIDDER deems necessary.
 3. BIDDER acknowledges that OWNER does not assume responsibility for the accuracy of dimensions or completeness of information and data shown or indicated in the Bidding Documents with respect to existing facilities.
 4. BIDDER has carefully studied all reports of explorations and tests of subsurface

conditions at or contiguous to the site of the Work (except underground facilities) and all drawings of physical conditions in or relating to existing surface or subsurface structures, pipelines, and utilities at or contiguous to the site are provided within these Contract Documents. Geotechnical Reports and other information regarding subsurface conditions are identified in the attached appendices and detailed in Article V of the PWC General Conditions. BIDDER acknowledges that the OWNER does not assume responsibility for the accuracy or completeness of information and data shown or indicated in the Bidding Documents with respect to underground facilities at or contiguous to the site of Work. BIDDER had obtained and carefully studied (or assumes responsibility for have done so) all such additional or supplementary examinations investigations, explorations, tests, studies, and data that are necessary to identify and understand conditions (surface, subsurface, and underground facilities) at or contiguous to the site of Work or otherwise which may affect cost, progress, performance, or furnishing the Work or which relate to any aspect of means, methods, techniques, sequences, and procedures of construction to be employed by Bidder and safety precautions and programs incident thereto. BIDDER waives all rights to claim that any additional examinations, investigations, explorations, tests, studies, or data are necessary for the proper submission of the Bid for the performance and furnishing of the Work in accordance with the Contract Time, Contract Price, and other terms and conditions of the Contract Documents.

5. BIDDER hereby certifies that, if awarded the Contract for construction of the Project, it will take all possible actions to minimize costs to the OWNER which are related to any disruptions in any part of the Work resulting from unforeseeable conditions which may be encountered and work changes or additions which may be made.
6. BIDDER has correlated the information known to BIDDER, information and observations obtained from visits to the site, reports and drawings identified in the Contract Documents, and all additional examinations, investigations, exploration, tests, studies, and data with the Contract Documents.
7. BIDDER has given OWNER written notice of all conflicts, errors, ambiguities, or discrepancies that BIDDER has discovered in the Contract Documents and the written resolution thereof by OWNER is acceptable to BIDDER, and the Contract Documents are generally sufficient to indicate and convey understanding of all terms and conditions for performing and furnishing the Work for which this Bid is submitted.
8. By bidding in response to this invitation, the BIDDER represents that in the preparation and submission of this Bid, said BIDDER did not, either directly or indirectly, enter into any combination or arrangement with any person, firm or corporation or enter into any agreement, participate in any collusion, or otherwise take any action in the restraint of free, competitive bidding in violation of the Sherman Act (15 U.S.C. Section 1).

9. Bid form must be completed in blue or black ink or typed.
 - i. Discrepancies between amounts shown in words and amounts shown in figures will be resolved in favor of the amounts shown in words.
 - ii. If the Bid Form requires unit prices and extended prices, the extended price for each line item shall be calculated by multiplying the bidder's submitted unit price by the quantity identified in the Bid Form.
 - iii. PWC will prepare a bid tabulation using the quantities identified in the Bid Form and the unit prices submitted by each bidder. PWC will verify the bidder's extended price for each line item by multiplying the bidder's submitted unit price by the applicable quantity. PWC will not modify or adjust a bidder's submitted unit price.
 - iv. For Bid Forms containing multiple line items, the total tabulated bid price shall be determined by summing the tabulated extended prices for all line items.
 - v. The bidder's submitted unit price shall govern for each line item. In the event of a discrepancy between a bidder's submitted extended price, subtotal, total bid price, bid opening announcement, or other bidder-calculated totals and the tabulated bid price calculated using the bidder's submitted unit prices and the quantities identified in the Bid Form, the tabulated bid price shall control for bid tabulation, evaluation, responsiveness determinations, and award recommendation purposes.
 - vi. Mathematical errors in the calculation of extended prices, subtotals, column totals, or grand totals shall not result in an adjustment to the bidder's submitted unit prices.
10. BIDDER understands that the award of contract will be made on the basis of the total Bid amount which will be determined as the sum of the unit price and lump sum Bid Items.
11. BIDDER understands that quantities are estimated and are not guaranteed; they are solely for comparing Bids and establishing the total Bid amount. The Price will be modified by Change Order, and final payment will be based on the quantities of work actually furnished and installed by the successful BIDDER.
12. BIDDER shall complete the Work for the prices indicated on the next page.

- BID SUMMARY-

Tom Starling	\$ _____(Lump Sum
Bragg Boulevard	\$ _____(Lump Sum)
Tess-Dunn Road (POD 5)	\$ _____(Lump Sum)
McArthur Road	\$ _____(Lump Sum)
River Road	\$ _____(Lump Sum)
TOTAL EXTENDED BID	\$ _____

**Total of all 5 locations*

The BIDDER has received, acknowledged, and used the following addenda in completing the Bid. (Initial and Date as appropriate).

Addendum No. 1	Date _____
Addendum No. 2	Date _____
Addendum No. 3	Date _____
Addendum No. 4	Date _____
Addendum No. 5	Date _____
Addendum No. 6	Date _____
Addendum No. 7	Date _____

The undersigned BIDDER _____ (Contractor Name) certifies that they are licensed as a Contractor under N.C.G.S § 87, and that their license number is _____ (License Number).

The undersigned BIDDER hereby agrees to accept an award of the Contract based on the Total Contract Amount as accepted by the OWNER and as indicated on the Notice of Award.

A. BIDDER agrees that Work shall be completed within the time frame indicated in the Agreement as follow:

1. All work described herein to be complete, including restoration and all punch list items from Notice to Proceed until the competition date noted in the Notice to Proceed.
2. The BIDDER acknowledges that time is of the essence in this Contract and that the OWNER will suffer financial loss if the Work is not complete within the time specified in Paragraph D.1 above plus any extensions thereof allowed in accordance with these Contract Documents. BIDDER also recognizes the delays, expense and difficulties involved in proving in a legal proceeding the actual loss suffered by the OWNER if the Work is not complete on time. The Bidder agrees to diligently pursue all available work and complete all work in an expeditious manner.

B. The following documents are attached to and made part of this bid:

Required Bid Security in the form of either a cashier's check or certified check or Bid Bond in the amount of 5% of maximum Bid price.

Communications concerning this Bid shall be addressed to: (SURETY'S Name, Address, Telephone Number, and Email)

C. Communications concerning this Bid shall be addressed to: (CONTRACTOR's Name, Address, Telephone Number, and Email)

D. The terms used in this Bid which are defined in Definitions and Terminology Section of the PWC General Conditions or as otherwise specifically defined in the Contract Documents have the meanings assigned to them therein, which are incorporated by reference as if fully set forth herein.

- E. An individual contractor is required to furnish his social security number and sole proprietorship, partnership and corporation are required to furnish their employer identification numbers to Fayetteville Public Works Commission. Please indicate this information on this Bid Form as follows:

Social Security Number: _____

Federal Employer Identification Number: _____

SUBMITTED ON ____ day of _____ 2026

AN INDIVIDUAL

BY: _____ (SEAL)

(Individual's Name and Signature)

Doing Business as: _____

North Carolina Contractor Registration Number: _____

Business Address: _____

Phone Number: _____

Subscribed and sworn to before me this ____ day of _____ 2026

NOTARY PUBLIC

My Commission Expires: _____

A PARTNERSHIP

BY: _____ (SEAL)

(Firm Name)

(General Partner and Signature)

North Carolina Contractor Registration Number: _____

Business Address: _____

Phone Number: _____

Subscribed and sworn to before me this ____ day of _____ 2026

NOTARY PUBLIC

My Commission Expires: _____

A CORPORATION

BY: _____
(Corporation Name) (State of Incorporation)

BY: _____ (SEAL)
(Name and Title of Person Authorized to Sign and Signature)

ATTEST: _____
(Secretary or Assistant Secretary and Signature)

North Carolina Contractor Registration Number: _____

Business Address: _____

Phone Number: _____

Subscribed and sworn to before me this ____ day of _____ 2026

NOTARY PUBLIC

My Commission Expires: _____

A JOINT VENTURE

BY: _____
(Name and Signature)

Doing Business as: _____

North Carolina Contractor Registration Number: _____

Business Address: _____

Phone Number: _____

Subscribed and sworn to before me this ____ day of _____ 2026

NOTARY PUBLIC

My Commission Expires: _____

(Each joint venturer must sign. The name of signing for each individual, partnership, and corporation that is a party to the joint venture should be in the manner indicated above.)

*****TO BE SUBMITTED WITH BID PACKAGE*****		
TECHNICAL EVALUATION CRITERIA FORM		
PROJECT DOCUMENTATION		
(1) Permanent Name of Business:		
(2) Permanent address:		
(3) Length of Time in Business:		
(4) Has the organization operated under any other name?		
(5) State the names and/or companies financially interested in the proposal:		
(6) Within the last five (5) years, has any officer or principal of the organization ever been an officer or principal of another organization when it failed to complete a construction contract? If yes, list name(s), and responsibility.		
TRANSMISSION ELECTRIC SUPPORT, REPAIRS, MAINTENANCE, AND OTHER HIGH-VOLTAGE TRANSMISSION SYSTEMS EXPERIENCE		
(1) List not less than three (3) completed high-voltage transmission systems, operating at 69kV and above projects of similar size, scope, nature, and cost, to include the dates of such projects. Please provide all requested information for each listed project. Each project should be from separate references. List only those projects completed as Prime Contractor.		
Project 1A:		Cost:
Location:	Dates:	Size:
Scope:	Client:	Phone:
Project 1B:		Cost:
Location:	Dates:	Size:
Scope:	Client:	Phone:

Technical Evaluation Form 69kV

Project 1C:		Cost:
Location:	Dates:	Size:
Scope:	Client:	Phone:
(2) List any subcontracting experience on high-voltage transmission systems, operating at 69kV and above with specifics to the type of work performed for this project. Please provide all requested information.		
Project:		Cost:
Location:	Dates:	Size:
Work Performed:		
Project:		Cost:
Location:	Dates:	Size:
Work Performed:		
Project:		Cost:
Location:	Dates:	Size:
Work Performed:		
(3) List of projects in progress. Please provide all requested information.		

Technical Evaluation Form 69kV

Project:		Cost:
Owner:		
Percentage Complete:	Scheduled Completion Date:	
Project:		Cost:
Owner:		
Percentage Complete:	Scheduled Completion Date:	
Project:		Cost:
Owner:		
Percentage Complete:	Scheduled Completion Date:	
Project:		Cost:
Owner:		
Percentage Complete:	Scheduled Completion Date:	
Project:		Cost:
Owner:		
Percentage Complete:	Scheduled Completion Date:	
Project:		Cost:
Owner:		
Percentage Complete:	Scheduled Completion Date:	
Project:		Cost:
Owner:		
Percentage Complete:	Scheduled Completion Date:	
PROJECT PERSONNEL AND EXPERIENCE		
(1) The number of crews qualified and available to perform the work stated in this proposal:		

Technical Evaluation Form 69kV

(2) The names of Bidder superintendents and crew leaders/foreman who are qualified and available to perform the work stated in this proposal:	Superintendents:
	Crew leaders/foreman:
ADDITIONAL ITEMS	
The following items shall be submitted as attachments:	
(1) Affidavit stating any OSHA violations occurring within the past three (3) years.	
(2) A statement provided by the Surety Company stating the Bidder's bonding limit and a statement of the amount of work currently under bond.	
(3) A statement listing any judgments, claims, arbitration proceedings, or suits pending or outstanding against organization or its officers.	
(4) A statement listing any filed lawsuits, judgments, claims, arbitration proceedings, or suits pending with regard to construction contracts within the last five (5) years.	
(5) The resumes or brief summary of key personnel of the organization. Identify the person that will be primarily responsible for the project.	
(6) List of equipment that is available for use on the subject project.	
The Owner may conduct such investigations/verifications as deemed necessary to establish the responsibility, qualification and financial ability of the Bidder. Should the Owner adjudge that the apparent low bidder is not the lowest responsive, responsible bidder by virtue of the above information furnished, said apparent low bidder will be so notified and his bid security shall be returned to him without prejudice. Failure or refusal to furnish any items of information requested by the Owner shall be considered as non-responsive and therefore, basis for rejection of the bid.	
Submitted By:	Date:
Printed Name:	Title:

Technical Evaluation Form 230kV

*****TO BE SUBMITTED WITH BID PACKAGE*****		
TECHNICAL EVALUATION CRITERIA FORM		
PROJECT DOCUMENTATION		
(1) Permanent Name of Business:		
(2) Permanent address:		
(3) Length of Time in Business:		
(4) Has the organization operated under any other name?		
(5) State the names and/or companies financially interested in the proposal:		
(6) Within the last five (5) years, has any officer or principal of the organization ever been an officer or principal of another organization when it failed to complete a construction contract? If yes, list name(s), and responsibility.		
TRANSMISSION ELECTRIC SUPPORT, REPAIRS, MAINTENANCE, AND OTHER HIGH-VOLTAGE TRANSMISSION SYSTEMS EXPERIENCE		
(1) List not less than three (3) completed high-voltage transmission systems, operating at 230kV and above projects of similar size, scope, nature, and cost, to include the dates of such projects. Please provide all requested information for each listed project. Each project should be from separate references. List only those projects completed as Prime Contractor.		
Project 1A:		Cost:
Location:	Dates:	Size:
Scope:	Client:	Phone:
Project 1B:		Cost:
Location:	Dates:	Size:
Scope:	Client:	Phone:

Technical Evaluation Form 230kV

Project 1C:		Cost:
Location:	Dates:	Size:
Scope:	Client:	Phone:
(2) List any subcontracting experience on high-voltage transmission systems, operating at 69kV and above with specifics to the type of work performed for this project. Please provide all requested information.		
Project:		Cost:
Location:	Dates:	Size:
Work Performed:		
Project:		Cost:
Location:	Dates:	Size:
Work Performed:		
Project:		Cost:
Location:	Dates:	Size:
Work Performed:		
(3) List of projects in progress. Please provide all requested information.		

Technical Evaluation Form 230kV

Project:		Cost:
Owner:		
Percentage Complete:		Scheduled Completion Date:
Project:		Cost:
Owner:		
Percentage Complete:		Scheduled Completion Date:
Project:		Cost:
Owner:		
Percentage Complete:		Scheduled Completion Date:
Project:		Cost:
Owner:		
Percentage Complete:		Scheduled Completion Date:
Project:		Cost:
Owner:		
Percentage Complete:		Scheduled Completion Date:
Project:		Cost:
Owner:		
Percentage Complete:		Scheduled Completion Date:
PROJECT PERSONNEL AND EXPERIENCE		
(1) The number of crews qualified and available to perform the work stated in this proposal:		

Technical Evaluation Form 230kV

(2) The names of Bidder superintendents and crew leaders/foreman who are qualified and available to perform the work stated in this proposal:	Superintendents:
	Crew leaders/foreman:
ADDITIONAL ITEMS	
The following items shall be submitted as attachments:	
(1) Affidavit stating any OSHA violations occurring within the past three (3) years.	
(2) A statement provided by the Surety Company stating the Bidder's bonding limit and a statement of the amount of work currently under bond.	
(3) A statement listing any judgments, claims, arbitration proceedings, or suits pending or outstanding against organization or its officers.	
(4) A statement listing any filed lawsuits, judgments, claims, arbitration proceedings, or suits pending with regard to construction contracts within the last five (5) years.	
(5) The resumes or brief summary of key personnel of the organization. Identify the person that will be primarily responsible for the project.	
(6) List of equipment that is available for use on the subject project.	
The Owner may conduct such investigations/verifications as deemed necessary to establish the responsibility, qualification and financial ability of the Bidder. Should the Owner adjudge that the apparent low bidder is not the lowest responsive, responsible bidder by virtue of the above information furnished, said apparent low bidder will be so notified and his bid security shall be returned to him without prejudice. Failure or refusal to furnish any items of information requested by the Owner shall be considered as non-responsive and therefore, basis for rejection of the bid.	
Submitted By:	Date:
Printed Name:	Title:

LIST OF SUBCONTRACTORS

Please provide the names of any local suppliers or subcontractors anticipated to be used on this project, including firms located within the Fayetteville Metropolitan Statistical Area (MSA), which consists of Cumberland, Hoke, and Harnett Counties. This form must be fully completed and attached to the bid submittal and each pay application thereafter.

If no subcontractors will be utilized, leave this form blank or indicate "None." If subcontractors are listed on this form. The information shall be consistent with the applicable subcontractor participation documents included in this IFB (e.g., PWC Small and Disadvantaged Business Enterprise (SDBE) Program Affidavits or the North Carolina Division of Water Infrastructure MBE/WBE (DBE) Compliance forms, as applicable to the funding source).

<u>Subcontractor's Name</u>	<u>Subcontractor's Work</u>	<u>% of Work</u>
_____	_____	_____ %
_____	_____	_____ %
_____	_____	_____ %
_____	_____	_____ %
_____	_____	_____ %

Bidder's Signature

BID BOND

This is a Bid Bond that is subject to the provisions of Article 3 of Chapter 44A of the North Carolina General statutes.

This Bond is executed on _____, 20 ____.

The name of the PRINCIPAL is _____ (1)

_____ (2)

The name of the SURETY is _____

Fayetteville Public Works Commission, Fayetteville, North Carolina is the OWNER

The amount of the Bond is _____

_____ (Dollars) (\$ _____)

KNOW BY ALL MEN BY THESE PRESENTS, the Principal and Surety above named are hereby held and firmly bound unto the above named OWNER hereinafter called the OWNER in the penal sum of the amount stated above in lawful money of the United States, for the payment of which, well and truly to be made, we hereby jointly and severally bind ourselves, our heirs, executors, administrators, successors and assigns.

The condition of the above obligation is such that whereas the Principal has submitted to the OWNER a certain Bid, attached hereto and hereby made a part hereof to enter into a Contract in writing, for the construction of:

**PWC2627014 – TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING,
BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD**

NOW, THEREFORE

- (a) If said Bid shall be rejected, or in the alternate,
- (b) If said Bid shall be accepted and the Principal shall execute and deliver a Contract in the Form of Contract attached hereto (properly completed in accordance with said Bid) and shall furnish a bond for his faithful performance of said Contract, and for the payment of all persons performing labor or furnishing materials in connection therewith, and shall in all other respects perform the agreement created by the acceptance of said Bid, then this obligation shall be void, otherwise the same shall remain in force and effect; it being expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall, in no event, exceed the penal amount of this obligation as herein stated.

PWC2627014 - TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

The Surety, for value received, hereby stipulates and agrees that the obligations of said Surety and its Bond shall be in no way impaired or affected by any extension of the time within which the Owner may accept such Bid; and said Surety does hereby waive notice of any such extension.

IN WITNESS WHEREOF, the Principal and the Surety have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers, the day and year first set forth above.

ATTEST:

(Principal Secretary)
(SEAL)

Principal

BY: _____ (3)

(Address)

Witness as to Principal

Surety

(Address)

(Address)

ATTEST:

N.C. Resident Agent
(SEAL)

Witness as to Surety

(Address)

- (1) Correct name of Contractor
- (2) A Corporation, a Partnership or an Individual, as the case may be
- (3) If Contractor is a Partnership, all partners should execute Bond

**POWER OF ATTORNEY
(Attach)**

**AFFIDAVIT OF ORGANIZATION AND AUTHORITY SWORN STATEMENT
TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING, BRAGG
BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD**

STATE OF _____

COUNTY OF _____

_____ being the first duly sworn on oath deposes and says that the Bidder on the attached Bid Form is organized as indicated below and that all statements herein made are made on behalf of such Bidder and that this deponent is authorized to make them.

(Fill Out Applicable Paragraph)

1. CORPORATION

The bidder is a corporation organized and existing under the laws of the State of _____ and its President is _____, and its Secretary is _____, and does have a corporate seal. The _____ is authorized to sign construction Contract and Bids for the company by action of its Board of Directors taken _____, a certified copy of which is hereto attached. (Strike out last sentence if not applicable.)

2. PARTNERSHIP

The Bidder is a Partnership consisting of _____ and _____, partners doing business under the name of _____.

3. SOLE TRADER

The Bidder is an individual and if operating under a trade name, such trade name is as follows:

4. ADDRESS

The business address of the Bidder is as follows:

Its phone number is _____

Bidder

By: _____

EQUAL EMPLOYMENT OPPORTUNITY

During the performance of this Contract the Contractor agrees as follows:

- a. The Contractor will not discriminate against any employee or applicant because of race, color, religion, sex, or national origin. The Contractor will take affirmative action to ensure that applicants are employed, and that employees are treated during employment, without regard to race, color, religion, sex, or national origin. Such action shall include but not be limited to the following: employment, upgrading, demotion, or transfer, recruitment or recruitment advertising, layoff or termination, rates of pay or other forms of compensation, and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices setting forth the provisions of the nondiscrimination clause.
- b. The Contractor will, in all solicitations or advertisements for employees placed by or on behalf of the Contractor, state that all qualified applicants will receive consideration for employment without regard to race, color, religion, sex, or national origin.
- c. The Contractor will send to each labor union or representative of workers with which he has a collective bargaining agreement or other Contract understanding, a notice, to be provided, advising the labor union or worker's representative of the Contractor's commitments under the Equal Employment Opportunity Section of this Contract, and shall post copies of the notice in conspicuous places available to employees and applicants for employment.
- d. In the event of the Contractor's noncompliance with the nondiscrimination clauses of this Contract or with any of such rules, regulations, or orders, this Contract may be canceled, terminated, or suspended in whole or in part and the Contractor may be declared ineligible for further OWNER Contracts.
- e. The Contractor will include the provisions of this section in every subcontract or purchase order unless exempted by rules, regulations, or orders of the OWNER so that such provisions will be binding upon each Subcontractor or vendor.

(Use the following form for signatures by a CORPORATION):

Corporate Name

ATTEST:

(Assistant) Secretary

(Vice) President

(CORPORATE SEAL)

(Use the following form for signatures by and INDIVIDUAL):

BY: _____ (Seal)

WITNESS:

(ACKNOWLEDGEMENT OF THE ABOVE SIGNATURE MUST BE NOTARIZED USING FORM
ON FOLLOWING PAGE)

NONDISCRIMINATION CLAUSE

It is specifically agreed as part of the consideration of the signing of this Contract that the parties hereto, their agents, officials, employees or servants will not discriminate in any manner on the basis of age, handicap, race, color, creed, sexual orientation or national origin with reference to the subject matter of this Contract, no matter how remote.

This provision being incorporated for the benefit of Fayetteville Public Works Commission, Fayetteville, North Carolina and its residents may be enforced as set out in said ordinances, enforcement of this provision shall be by action for specific performance, injunctive relief, or other remedy as by law provided.

This provision shall be binding on the successors and assigns of the parties hereto with reference to the subject matter of this Contract.

(Use the following form for signatures by a CORPORATION):

Corporate Name

ATTEST:

(Assistant) Secretary

BY: _____
(Vice) President

(Printed Name)

BY: _____
(Printed Name)

(Corporate Seal)

(Use the following form for signatures by a PARTNERSHIP or INDIVIDUAL):

BY: _____(SEAL)

(Printed Name)

WITNESS:

(Printed Name)

NON-COLLUSIVE AFFIDAVIT

State of _____)

)

County of _____)

_____ being first duly sworn,
deposes and says that:

- (1) He is the _____
(Owner, Partner, Officer, Representative or Agent)
of _____ the BIDDER that has
submitted the attached BID;
- (2) He is fully informed respecting the preparation and contents of the attached BID and of all
pertinent circumstances respecting such BID;
- (3) Such BID is genuine and is not a collusive or sham BID;
- (4) Neither the said BIDDER nor any of its officers, partners, owners, agents, representatives,
employees or parties in interest, including this affiant, have in any way colluded, conspired,
connived or agreed, directly or indirectly, with any other BIDDER, firm, or person to submit
a collusive or sham BID in connection with the Contract for which the attached BID has
been submitted; or to refrain from bidding in connection with such Contract; or have in any
manner, directly or indirectly, sought by agreement or collusion, or communication, or
conference with any BIDDER, firm, or person to fix the price or prices in the attached BID
or of any other BIDDER, or to fix any overhead, profit, or cost elements of the BID price
or the BID price of any other BIDDER, or to secure through any collusion, conspiracy,
connivance, or unlawful agreement any advantage against (Recipient), or any person
interested in the proposed Contract;
- (5) The price or prices quoted in the attached BID are fair and proper and are not tainted by
any collusion, conspiracy, connivance, or unlawful agreement on the part of the BIDDER
or any other of its agents, representatives, owners, employees or parties in interest,
including this affidavit.

BY _____

ITS _____
(Title)

Subscribed and sworn to before me this _____ day of _____, 20 ____ .

Notary Public

My Commission Expires:

END OF AFFIDAVIT

F.T.A. CERTIFICATION REGARDING LOBBYING

Certification for Contracts, Grants, Loans, and Cooperative Agreements

(To be submitted with each bid or offer exceeding \$100,000)

The undersigned _____ certifies, to the best of his or her knowledge and belief, that:

- (1) No federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of an agency, a member of Congress, an officer or employee of Congress, or an employee of a member of Congress in connection with the awarding of any federal contract, the making of any federal grant, the making of any federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any federal contract, grant, loan, or cooperative agreement.
- (2) If any funds other than federal appropriated funds have been paid or will be paid to any person for making lobbying contacts to an officer or employee of any agency, a member of Congress, an officer or employee of Congress, or an employee of a member of Congress in connection with this federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form--LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions [as amended by "Government wide Guidance for New Restrictions on Lobbying," 61 Fed. Reg. 1413 (1/19/96). Note: Language in paragraph (2) herein has been modified in accordance with Section 10 of the Lobbying Disclosure Act of 1995 (P.L. 104-65, to be codified at 2 U.S.C. 1601, *et seq.*.)]
- (3) The undersigned shall require that the language of this certification be included in the award documents for all subawards at all tiers (including subcontracts, subgrants, and contracts under grants, loans, and cooperative agreements) and that all subrecipients shall certify and disclose accordingly.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31, U.S.C. § 1352 (as amended by the Lobbying Disclosure Act of 1995). Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

[Note: Pursuant to 31 U.S.C. § 1352(c)(1)-(2)(A), any person who makes a prohibited expenditure or fails to file or amend a required certification or disclosure form shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such expenditure or failure.]

The Contractor, _____, certifies or affirms the truthfulness and accuracy of each statement of its certification and disclosure, if any. In addition, the Contractor understands and agrees that the provisions of 31 U.S.C. A 3801, *et seq.*, *apply* to this certification and disclosure, if any.

_____ Signature of Contractor's Authorized Official

_____ Name and Title of Contractor's Authorized Official

_____ Date

**CERTIFICATION OF PRIMARY PARTICIPANT REGARDING DEBARMENT,
SUSPENSION AND OTHER RESPONSIBILITY MATTERS**

The Primary Participant, _____ (major third party contractor), certifies to the best of its knowledge and belief, that it and its principals:

1. Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
2. Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
3. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (2) of this certification; and
4. Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

(If the primary participant is unable to certify to any of the statements in this certification, the participant shall attach an explanation to this certification.)

THE PRIMARY PARTICIPANT _____ CERTIFIES
OR AFFIRMS THE TRUTHFULNESS AND ACCURACY OF THE CONTENTS OF THE
STATEMENTS SUBMITTED ON OR WITH THIS CERTIFICATION AND UNDERSTANDS THAT
THE PROVISIONS OF 31 U.S.C. SECTIONS 3801 ET. SEQ. ARE APPLICABLE THERETO.

Signature

Title

Printed Name

Date

DAVIS-BACON INSTRUCTIONS FOR SRF AND GRIP GRANT

- **To be included in the Contract Documents:**

1. The entire contents of **29 CFR 5.5**.
2. The appropriate wage determination (usually Heavy). This determination must be the most current and have been in effect at least 10 days prior to bid opening. If a wage determination for the project location is not available, then the Statewide wage determination may be used. If it takes longer than 90 days to execute contracts and the wage determination changes, the new wage rates must be incorporated into the contract. Wage Determinations can be found at : <http://www.wdol.gov/sca.aspx>

- **During Construction:**

1. Posting Requirements:
 - i. Post the **Davis-Bacon Poster**:
www.dol.gov/whd/regs/compliance/posters/fedprojc.pdf
 - ii. Post the **appropriate wage rates**. These should be the ones included in the specifications and any new classifications approved by the Department of Labor.
2. Payroll Records:
 - i. Weekly payrolls are to be maintained onsite for all subject contractors and subcontractors.
 - ii. Number each payroll sequentially for each week of the construction period, including weeks that do not have payroll activity. Use Form WH-347 (suggested but not required). Link to **Form WH 347** - -
<http://www.dol.gov/whd/forms/wh347.pdf>
 - iii. Submit weekly payroll records to PWC for review. Payroll submissions may be done electronically where feasible to promote efficiency.
3. Employee Interviews and Monitoring:
 - i. PWC will conduct periodic employee interviews, using **Standard Form 1445**, to verify compliance with prevailing wages and address irregularities concerning wages paid.
 - ii. When additional wage classifications are required, complete **Form SF-1444** and submit to: whd-cbaconformance_incoming@dol.gov.

- **Contractor Compliance Requirements:**

1. Flow-Down of Davis-Bacon Act Clauses:
 - i. All contracts and subcontracts must include the clauses contained in **29 CFR 5.5(a)(1)-(10)**.
 - ii. Contractors are responsible for ensuring that all lower-tier subcontractors comply with these provisions.

2. Notification of Labor Standards Issues:
 - i. Contractors must notify PWC or the contracting officer immediately of any labor standards issues, including:
 1. Complaints regarding incorrect payment of prevailing wages or fringe benefits.
 2. Significant labor standards violations as defined in **29 CFR 5.7**.
 3. Disputes concerning labor standards or investigations initiated by the Department of Labor (DOL).
3. Training Requirement:
 1. Contractors and subcontractors must complete Davis-Bacon Act compliance training for key personnel prior to the start of construction. Proof of training must be submitted to the contracting officer.
4. Certification of Eligibility:
 1. By submitting a bid, the contractor certifies that neither it nor its subcontractors are debarred under **29 CFR 5.12(a)(1)** or otherwise ineligible to be awarded federal contracts.
5. Dispute Resolution:
 1. Disputes arising from labor standards provisions will be resolved in accordance with **29 CFR parts 5, 6, and 7**.
6. Liquidated Damages:
 1. Contractors must comply with the **Contract Work Hours and Safety Standards Act (CWHSSA)**. Violations will result in liquidated damages of \$10 per day per affected worker for overtime violations, as specified in **29 CFR 5.5(b)(2)**.
- **Included in this Package:**
 1. These Instructions
 2. 29 CFR 5.5
 3. Davis-Bacon Poster (WH-1321)
 4. Payroll Form WH-347

29 CFR §5.5 Contract provisions and related matters.

(a) The Agency head shall cause or require the contracting officer to insert in full in any contract in excess of \$2,000 which is entered into for the actual construction, alteration and/or repair, including painting and decorating, of a public building or public work, or building or work financed in whole or in part from Federal funds or in accordance with guarantees of a Federal agency or financed from funds obtained by pledge of any contract of a Federal agency to make a loan, grant or annual contribution (except where a different meaning is expressly indicated), and which is subject to the labor standards provisions of any of the acts listed in §5.1, the following clauses (or any modifications thereof to meet the particular needs of the agency, *Provided*, That such modifications are first approved by the Department of Labor):

(1) *Minimum wages.* (i) All laborers and mechanics employed or working upon the site of the work (or under the United States Housing Act of 1937 or under the Housing Act of 1949 in the construction or development of the project), will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph (a)(1)(iv) of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in §5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: *Provided*, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph (a)(1)(ii) of this section) and the Davis-Bacon poster (WH- 1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

(ii)(A) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(1) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(2) The classification is utilized in the area by the construction industry; and

(3) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(B) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(C) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Administrator for determination. The Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(D) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs (a)(1)(ii) (B) or (C) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

(iii) Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

(iv) If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, *Provided*, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

(2) *Withholding.* The (write in name of Federal Agency or the loan or grant recipient) shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld from the contractor under this contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices,

trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work (or under the United States Housing Act of 1937 or under the Housing Act of 1949 in the construction or development of the project), all or part of the wages required by the contract, the (Agency) may, after written notice to the contractor, sponsor, applicant, or owner, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

(3) *Payrolls and basic records.* (i) Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work (or under the United States Housing Act of 1937, or under the Housing Act of 1949, in the construction or development of the project). Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

(ii)(A) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the (write in name of appropriate federal agency) if the agency is a party to the contract, but if the agency is not such a party, the contractor will submit the payrolls to the applicant, sponsor, or owner, as the case may be, for transmission to the (write in name of agency). The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site

at <http://www.dol.gov/esa/whd/forms/wh347instr.htm> or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the (write in name of appropriate federal agency) if the agency is a party to the contract, but if the agency is not such a party, the contractor will submit them to the applicant, sponsor, or owner, as the case may be, for transmission to the (write in name of agency), the contractor, or the Wage and Hour Division of the Department of Labor for purposes of an

investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the sponsoring government agency (or the applicant, sponsor, or owner).

(B) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(1) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(2) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(3) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(C) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph (a)(3)(ii)(B) of this section.

(D) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

(iii) The contractor or subcontractor shall make the records required under paragraph (a)(3)(i) of this section available for inspection, copying, or transcription by authorized representatives of the (write the name of the agency) or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the Federal agency may, after written notice to the contractor, sponsor, applicant, or owner, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

(4) *Apprentices and trainees-(i) Apprentices.* Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is

not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice. The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed. Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination. In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(ii) *Trainees*. Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration. The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work

performed until an acceptable program is approved.

(iii) *Equal employment opportunity.* The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

(5) *Compliance with Copeland Act requirements.* The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

(6) *Subcontracts.* The contractor or subcontractor shall insert in any subcontracts the clauses contained in 29 CFR 5.5(a)(1) through (10) and such other clauses as the (write in the name of the Federal agency) may by appropriate instructions require, and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

(7) *Contract termination: debarment.* A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

(8) *Compliance with Davis-Bacon and Related Act requirements.* All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

(9) *Disputes concerning labor standards.* Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

(10) *Certification of eligibility.* (i) By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

(ii) No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

(iii) The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

(b) *Contract Work Hours and Safety Standards Act.* The Agency Head shall cause or require the contracting officer to insert the following clauses set forth in paragraphs (b)(1), (2), (3), and (4) of this section in full in any contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by §5.5(a) or §4.6 of part 4 of this title. As used in this paragraph, the

terms *laborers* and *mechanics* include watchmen and guards.

(1) *Overtime requirements.* No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

(2) *Violation; liability for unpaid wages; liquidated damages.* In the event of any violation of the clause set forth in paragraph (b)(1) of this section the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (b)(1) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (b)(1) of this section.

(3) *Withholding for unpaid wages and liquidated damages.* The (write in the name of the Federal agency or the loan or grant recipient) shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (b)(2) of this section.

(4) *Subcontracts.* The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (b)(1) through (4) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (b)(1) through (4) of this section.

(c) In addition to the clauses contained in paragraph (b), in any contract subject only to the Contract Work Hours and Safety Standards Act and not to any of the other statutes cited in §5.1, the Agency Head shall cause or require the contracting officer to insert a clause requiring that the contractor or subcontractor shall maintain payrolls and basic payroll records during the course of the work and shall preserve them for a period of three years from the completion of the contract for all laborers and mechanics, including guards and watchmen, working on the contract. Such records shall contain the name and address of each such employee, social security number, correct classifications, hourly rates of wages paid, daily and weekly number of hours worked, deductions made, and actual wages paid. Further, the Agency Head shall cause or require the contracting officer to insert in any such contract a clause providing that the records to be maintained

under this paragraph shall be made available by the contractor or subcontractor for inspection, copying, or transcription by authorized representatives of the (write the name of agency) and the Department of Labor, and the contractor or subcontractor will permit such representatives to interview employees during working hours on the job.

WORKER RIGHTS

UNDER THE DAVIS-BACON ACT

FOR LABORERS AND MECHANICS WORKING ON FEDERAL OR FEDERALLY ASSISTED CONSTRUCTION PROJECTS

The law requires employers to display this poster where workers can readily see it.

PREVAILING WAGES

You must be paid not less than the wage rate listed in the Davis-Bacon Wage Decision posted with this notice for the work you perform.

OVERTIME

You must be paid not less than one and one-half times your basic rate of pay for all hours worked over 40 in a work week. There are few exceptions.

ENFORCEMENT

Contract payments can be withheld to ensure workers receive wages and overtime pay due, and liquidated damages may apply if overtime pay requirements are not met. Davis-Bacon contract clauses allow contract termination and debarment of contractors from future federal contracts for three years. A contractor who falsifies certified payroll records or induces wage kickbacks may be subject to civil or criminal prosecution, fines and/or imprisonment.

APPRENTICES

Apprentice rates apply only to apprentices properly registered under approved federal or state apprenticeship programs.

RETALIATION

The law prohibits discharging or otherwise retaliating against workers for filing a complaint, cooperating in an investigation, or testifying in a proceeding under the Davis-Bacon and Related Acts.

PROPER PAY

If you do not receive proper pay, or require further information on the applicable wages, contact the Contracting Officer listed below:

or contact the U.S. Department of Labor's Wage and Hour Division.



WAGE AND HOUR DIVISION
UNITED STATES DEPARTMENT OF LABOR

866-487-9243
dol.gov/agencies/whd



Davis-Bacon and Related Acts Weekly Certified Payroll Form

(For Contractor's Optional Use; See Instructions at www.dol.gov/whd/forms/wh347instr.htm)

Unless otherwise noted, the information requested is specific to the named project below.

Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number.



Rev. January 2025
OMB No.: 1235-0008
Expires: 01/31/2028

☐ SUBMISSION OF FINAL DBRA CERTIFIED PAYROLL FORM

☐ PRIME CONTRACTOR

☐ SUBCONTRACTOR

PROJECT NAME				PROJECT NO. or CONTRACT NO.			CERTIFIED PAYROLL NO.		PRIME CONTRACTOR'S/SUBCONTRACTOR'S BUSINESS NAME																
PROJECT LOCATION				WAGE DETERMINATION NO.			WEEK ENDING DATE		PRIME CONTRACTOR'S/SUBCONTRACTOR'S BUSINESS ADDRESS																
(1A)	(1B)	(1C)	(1D)	(1E)	(2)	(3)	(4)				(5)	(6A)	(6B)	(6C)	(7A)	(7B)	(8)			(9)					
WORKER ENTRY NO.	WORKER LAST NAME	WORKER FIRST NAME	WORKER MIDDLE INITIAL	WORKER IDENTIFYING NO.	(J) JOURNEYWORKER (RA) REGISTERED APPRENTICE	LABOR CLASSIFICATION	ST = STRAIGHT TIME OT = OVERTIME	(TOP) DAYS OF WORK WEEK (BOTTOM) DATES							TOTAL HOURS WORKED FOR WEEK	HOURLY WAGE RATE PAID FOR ST AND OT	TOTAL FRINGE BENEFIT CREDIT	PAYMENT IN LIEU OF FRINGE BENEFITS	GROSS AMT EARNED	GROSS AMT EARNED FOR ALL WORK	DEDUCTIONS FOR ALL WORK				NET PAY TO WORKER FOR ALL WORK
								HOURS WORKED EACH DAY													TAX WITH-HOLDINGS	FICA	OTHER (MUST SPECIFY, SEE INSTRUCTIONS)	TOTAL DEDUCTIONS	
							ST																		
							OT																		
							ST																		
							OT																		
							ST																		
							OT																		
							ST																		
							OT																		
							ST																		
							OT																		
							ST																		
							OT																		
							ST																		
							OT																		
							ST																		
							OT																		

While use of Form WH-347 itself is optional, covered contractors and subcontractors performing work on Federal or federally assisted construction contracts are required by the DBRA regulations and the contract clauses to submit payroll information on a weekly basis. The Copeland Act (40 U.S.C. § 3145) requires contractors and subcontractors performing work on Federal or federally financed construction contracts to, on a weekly basis, "furnish a statement on the wages paid each employee during the prior week." U.S. Department of Labor (DOL) Regulations at 29 C.F.R. § 5.5(a)(3)(ii) require contractors and subcontractors to submit weekly certified payrolls to the appropriate Federal agency if the agency is a party to the contract (or, if the agency is not such a party, to the applicant, sponsor, owner, or other entity, as the case may be, that maintains such records, for transmission to the Federal agency). Each certified payroll must be accompanied by a signed "Statement of Compliance" (e.g., page 2 of the WH-347 or another document with identical wording) indicating that the certified payrolls are accurate and complete, and that each laborer or mechanic has been paid not less than the required Davis-Bacon prevailing wage rate(s) (including any fringe benefits) for the work performed. DOL and contracting agencies receiving this information review the information to determine whether workers have received legally required wages and fringe benefits.

Public Burden Statement

We estimate that it will take an average of 55 minutes to complete this collection, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. If you have any comments regarding these estimates or any other aspect of this collection, including suggestions for reducing this burden, send them to the Administrator, Wage and Hour Division, U.S. Department of Labor, Room S3502, 200 Constitution Avenue, N.W. Washington, D.C. 20210 (over)

PROJECT NAME			PROJECT NO. or CONTRACT NO.			PAYROLL NO.			PRIME CONTRACTOR'S/SUBCONTRACTOR'S BUSINESS NAME					
PROJECT LOCATION			WEEK ENDING DATE			CERTIFYING OFFICIAL'S NAME AND TITLE								
☐ I paid or supervised the payment of the laborers or mechanics working on the above project during the stated time period. I certify the following:														
☐ The payroll information submitted with this statement is correct and complete for the above project during the above period, and the wage and fringe benefit rates paid to the workers, including credit taken for the reasonably anticipated costs of a bona fide fringe benefit plan, fund or program, are not less than the applicable wage and fringe benefits rates for the classification(s) of work actually performed, as specified in the wage determination(s) incorporated into the contract.														
☐ All regular payrolls and all other basic records that the contractor is required to maintain for this payroll period are complete and accurate and will be made available upon request from the agency or the Department of Labor.														
☐ The classifications reported for each laborer or mechanic are the classification(s) of work that each worker actually performed.														
☐ Any workers paid as apprentices during the above period are duly registered in a bona fide apprenticeship program registered with the Office of Apprenticeship, Employment and Training Administration, United States Department of Labor ("OA"), or a State Apprenticeship Agency ("SAA") recognized by Department of Labor. I have verified the registered apprenticeship program information provided below as accurate and applicable to any apprentices identified on page 1 of this form.														
APPRENTICESHIP PROGRAM NAME						REGISTERED		NAME OF LABOR CLASSIFICATION						
						☐ OA ☐ SAA								
						☐ OA ☐ SAA								
						☐ OA ☐ SAA								
☐ Fringe benefits have been paid in cash and/or to bona fide fringe benefit plans, funds, or programs. Where the contractor is claiming an hourly credit for their contributions to or reasonably anticipated costs of a bona fide fringe benefit plan, fund, or program, provide plan information and the hourly credit claimed for each worker listed on the previous page of this form.														
HOURLY CREDIT FOR FRINGE BENEFITS <i>If an amount is listed in (6B) on the first page of this certified payroll form, enter the hourly credit claimed under each plan name, type and number for each worker and check whether the plan is funded or unfunded.</i>														
NAME OF WORKER	FB NAME		FB NAME		FB NAME		FB NAME		FB NAME		FB NAME		TOTAL HOURLY CREDIT	
	FB TYPE		FB TYPE		FB TYPE		FB TYPE		FB TYPE		FB TYPE			
	PLAN NO.		PLAN NO.		PLAN NO.		PLAN NO.		PLAN NO.		PLAN NO.			
	☐ Funded	☐ Unfunded	☐ Funded	☐ Unfunded	☐ Funded	☐ Unfunded	☐ Funded	☐ Unfunded	☐ Funded	☐ Unfunded	☐ Funded	☐ Unfunded		
	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	\$	
	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	\$	
	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	\$	
	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	\$	
	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	\$	
	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	\$	
	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	\$	
	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	\$	
	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	Hourly Credit	\$	\$	
☐ All workers on the project have been paid the full weekly wages earned, and no rebates or deductions have been or will be made either directly or indirectly, other than permissible deductions as defined in 29 CFR part 3.														
ADDITIONAL REMARKS														
SIGNATURE OF CERTIFYING OFFICIAL						DATE		TELEPHONE NUMBER			EMAIL ADDRESS			
								(____) ____ - ____						
THE WILLFUL FALSIFICATION OF ANY OF THE ABOVE STATEMENTS MAY SUBJECT THE CONTRACTOR OR SUBCONTRACTOR TO CIVIL OR CRIMINAL PROSECUTION (SEE SECTION 1001 OF TITLE 18 AND SECTION 3729 OF TITLE 31 OF THE UNITED STATES CODE), AS WELL AS DEBARMENT FROM FUTURE FEDERAL AND FEDERALLY-ASSISTED CONTRACTS. INFORMATION REPORTED IN CERTIFIED PAYROLLS MAY BE SUBJECT TO DISCLOSURE IN RESPONSE TO A FREEDOM OF INFORMATION ACT REQUEST.														

NC Division of Water Infrastructure MBE/WBE (DBE) Compliance Supplement

Instructions (CDBG-I)

(This package combines the various aspects of State of NC HUB program requirements and Federal DBE requirements into a single compliance supplement to eliminate redundancy and ambiguity)

Item	What to do with it
Good Faith Efforts Form	Provided by all bidders to be responsive Only low bidder's form is submitted to the State
Table A (Summary of firms on job)	Provided by all bidders to be responsive Only low bidder's form is submitted to the State
Table B (per item being subbed)	Provided by low bidder if SRF project or SRP/SEL* that obtains less than 10% M/WBE utilization (see page 2)
Provide documentation of anything you did that is mentioned later in this supplement (Keep documents in Local Government files)	- Proof of trade paper advertisement - Printouts of DBE sources used - Solicitation emails and/or letters
Additional Forms for SRF Projects (these forms are currently not applicable)	
6103 3 (per M/WBE firm)	Provided by low bidder if SRF project
6100 2	Distributed to M/WBE firms if SRF project
Subs submit concerns on 6100 2 forms to	Michael Pigram
	Region 4, Atlanta Federal Center
	61 Forsyth Street
	Atlanta, GA 30303-8960

NOTES on this Compliance Supplement

Verifiable Goals

- **EPA MBE/WBE participation goal:** MBE 10.9%
WBE 10.4%

These are goals that the State reports against and are not quotas. The good faith efforts must be adhered to and all forms provided regardless of what percentage utilization is achieved.

- **State of NC MBE/WBE participation goal:** MBE 10.9% (combined)

Table B is not required for SRP and SEL projects if you achieve 10% utilization.

DBE (MBE or WBE) Certification

In order for a firm to count towards the goals, a firm must be properly certified. Table A and Table B both provide spaces to note who certified the firm. The North Carolina Department of Administration and North Carolina Department of Transportation are the most common certifications we see listed. Division of Water Infrastructure staff verify all certifications listed.

PWC2627014 - TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

For SRF projects, please note the EPA's six Good Faith Efforts found in 40 CFR 33
Filling out the Good Faith Efforts Form and providing Table B (if subcontracting is achieved) constitutes compliance with EPA's six good faith efforts.

- (1) Ensure MBE/WBEs are made aware of contracting opportunities to the fullest extent practicable through outreach and recruitment activities. For Indian Tribal, State and local Government recipients, this will include placing MBE/WBEs on solicitation lists and soliciting them whenever they are potential sources.
- (2) Make information of forthcoming opportunities available to MBE/WBEs and arrange time for contracts and establish delivery schedules, where requirements permit, in a way that encourages and facilitates participation by DBEs in the competitive process. This includes, whenever possible, posting solicitations for bids or proposals for a minimum of 30 calendar days before the bid or proposal closing date.
- (3) Consider in the contracting process whether firms competing for large contracts could subcontract with MBE/WBEs. For Indian Tribal, State and local Government recipients, this will include dividing total requirements when economically feasible into smaller tasks or quantities in order to increase opportunities for participation by MBE/WBEs in the competitive process.
- (4) Encourage contracting with a consortium of MBE/WBEs when a contract is too large for one of these firms to handle individually.
- (5) Use the services and assistance of the SBA and the MBDA.
- (6) If the prime contractor awards subcontracts, require the prime contractor to take the steps in subparagraphs (1)-(5) of this section.

Pertinent State of North Carolina Administrative Code Regarding M/WBE Compliance. The provisions in this Compliance Supplement constitute compliance with the Rules below.

Owner Requirements	01 NCAC 30I .0306
Contractor Requirements	01 NCAC 30I .0308

Resources

Some sources for identifying MBE/WBE (DBE) firms

- <https://www.ips.state.nc.us/vendor/SearchVendor.aspx> (NCDOA)
- <https://www.ebs.nc.gov/VendorDirectory/default.html> (NCDOT)
- http://dsbs.sba.gov/dsbs/search/dsp_dsbs.cfm (US SBA)

Some sources for finding minority trade papers for potential solicitation advertisements and Federal advertising options

- <http://web.sba.gov/subnet/> (US SBA Subnet advertising website)
 - <https://www.mbda.gov/> (US Dept. of Commerce)
 - <https://ncadmin.nc.gov/businesses/hub> (NC HUB Office)
-

Good Faith Efforts Form

Attempts to provide subcontracting opportunities for MBE/WBE firms.

Per 01 NCAC 30I .0101, 50 points must be claimed below by the bidder.

(This is identical to State of NC Affidavit A)

- ☐ **1 – (10 pts)** Contacted minority businesses that reasonably could have been expected to submit a quote and that were known to the contractor, or available on State or local government maintained lists, at least 10 days before the bid date and notified them of the nature and scope of the work to be performed.
- ☐ **2 --(10 pts)** Made the construction plans, specifications and requirements available for review by prospective minority businesses, or providing these documents to them at least 10 days before the bids are due.
- ☐ **3 – (15 pts)** Broken down or combined elements of work into economically feasible units to facilitate minority participation.
- ☐ **4 – (10 pts)** Worked with minority trade, community, or contractor organizations identified by the Office of Historically Underutilized Businesses and included in the bid documents that provide assistance in recruitment of minority businesses.
- ☐ **5 – (10 pts)** Attended pre-bid meetings scheduled by the public owner.
- ☐ **6 – (20 pts)** Provided assistance in getting required bonding or insurance or provided alternatives to bonding or insurance for subcontractors.
- ☐ **7 – (15 pts)** Negotiated in good faith with interested minority businesses and did not reject them as unqualified without sound reasons based on their capabilities. Any rejection of a minority business based on lack of qualification should have the reasons documented in writing.
- ☐ **8 – (25 pts)** Provided assistance to an otherwise qualified minority business in need of equipment, loan capital, lines of credit, or joint pay agreements to secure loans, supplies, or letters of credit, including waiving credit that is ordinarily required. Assisted minority businesses in obtaining the same unit pricing with the bidder's suppliers to help minority businesses in establishing credit.
- ☐ **9 – (20 pts)** Negotiated joint venture and partnership arrangements with minority businesses to increase opportunities for minority business participation on a public construction or repair project when possible.
- ☐ **10 - (20 pts)** Provided quick pay agreements and policies to enable minority contractors and suppliers to meet cash-flow demands.

Results of Good Faith Efforts Undertaken (you must check one box below)

- ☐ No subcontractors are being used for this contracted work. Fill out Table A listing only the Prime Contractor. **(This statement takes the place of State of NC Affidavit B)**
- ☐ Subcontractors are being used. Fill out Table A and B for each trade. **Each Table B lists 3.**
- ☐ Subcontractors are being used. If any Table B has fewer than 3 solicitations, you must also advertise in an M/WBE trade paper and indicate what source of M/WBE firms you used (*must list at least one*). Some possible papers and sources of M/WBE firms are listed in the Instructions of this Supplement.

Name of the Trade Paper:

Submit proof of advertisement with package

M/WBE Sources: Source: _____ Source: _____

Submit printouts from M/WBE source(s)


Certification Statement and Affidavit of Contractor.

The below affidavit constitutes compliance with 01NCAC 30I .0308(7)(a) and (b) and takes the place of State of North Carolina Affidavits C and D.

I have read the information in this compliance supplement and all information provided to the State in this package is accurate and true to the extent of my knowledge including the calculated percentages and the good faith efforts presented herein.

Prime Contractor Company Name (Print & Date)

Prime Contractor Representative (Sign



State of _____, County of _____

Subscribed and sworn to before me this _____ day of _____

Notary Public _____

My Commission

Expires _____

Applicant Name (Print)

Applicant Authorized Representative (Sign & Date)

Division of Water Infrastructure Project Number

PWC2627014 - TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

Table A: Prime Contractor and list of selected subcontractors

List Prime and ALL of the selected subcontractors (both DBE's and non-DBE's) being used on the project. Each Trade listed on this sheet should have a completed Table B: Subcontract Solicitation List showing the DBE firms contacted and given opportunities to bid.

Company Name (list prime first then subs)	Company Address and Phone	Trade (Above) and Price (Below)	MBE or WBE and certifying agency <u>if</u> applicable	(State use only) Listed in EPLS as Debarred?
		\$		
		\$		
		\$		
		\$		

Calculate M/WBE utilization as a percent (00.00%) of the prime contract. Limited to 100% even if the Prime is a DBE.

MBE and WBE subs total	\$	_____ %
Prime Contract Price	\$	

Table B: Subcontract Solicitation List

Table B is required if:

- 1) Utilization % on Table A is less than 10%

Trade: _____ (enter the trade being solicited, paving, hauling etc.)

List the firm being used on the project first. If three MBE or WBE firms are not listed, additional information must be provided showing advertisements and/or sources used to identify MBE/WBE subs.

Use as many of these sheets as are necessary to cover every trade being subbed out.

Company Name	Company Address and Phone	MBE or WBE and certifying agency if applicable.	How was this firm contacted (email, letter, phone) and what was the result of the solicitation? *

*Must submit copies of emails or letters. If phone calls were made this sheet can serve as documentation of calls.

MBE/WBE (DBE) – Change or Add a Subcontractor Form

According to EPA guidance on 40 CFR 33.302

If a DBE subcontractor fails to complete work under the subcontract for any reason, the recipient must require the prime contractor to employ the six good faith efforts described in §33.301 if soliciting a replacement subcontractor.

Please provide the information below **if the subcontracted work in question was included in previously submitted good faith efforts documentation:**

Prime Contractor:

Subcontracted work:

Previous Subcontractor:

Reason this firm did not complete the work:

New subcontractor and DBE status:

☐ MB

☐ WB

☐ N/

If this is a new trade being subcontracted or was not documented in the original Project Bid Information submittal to the State then good faith efforts to solicit a DBE firm must be documented. As the original DBE instructions indicate, please provide a Table B from those original instructions, showing all the DBE firms contacted to perform this work. If three (3) firms are not listed on Table B, then additionally you must submit proof of an advertisement in a minority trade paper and evidence that there were not three reasonably available firms in the work area. The EPA provides in 33.301(a) that good faith efforts are to be carried out "...to the fullest extent practicable...". If solicitations were not carried out due to being impracticable, please attach this explanation to this form.

Please follow the steps below for new subcontracted work:

Indicate the new trade being subcontracted:

Indicate the firm being used and DBE status:

☐

MBE

☐

WBE

☐

N/A

Attach Table B

(For State Use) Is this sub debarred?

☐

Yes

☐

No

Project Owner/Applicant:

Project Number:

Signature of Prime Contractor's Representative

AMERICAN IRON AND STEEL (AIS)

GUIDANCE FOR SRF PROJECTS IN NORTH CAROLINA

This state guidance **summarizes** the requirements under Subsection 436 (a)(2) of the Consolidated Appropriations Act of 2014 that SRF recipients only use iron and steel products produced in the United States. The Environmental Protection Agency provides full guidance on the requirements at the following website:

http://water.epa.gov/grants_funding/aisrequirement.cfm.

Recipients of subject SRF awards must submit the executed **Certification for SRF Projects** and any waiver requests with their Bid Package. The recipient cannot receive a promissory note without these items.

Manufacturers can use the template “Compliance Certification” to document that materials are “produced in the United States.”

Contents

1. Certification for SRF Projects
2. AIS Waiver Instructions
3. Materials covered by AIS
4. Template *Compliance Certification* for Materials Covered by AIS
5. Template *De Minimis* list

AMERICAN IRON AND STEEL (AIS)

CERTIFICATION FOR SRF PROJECTS

Recipients of subject SRF awards must submit **this executed form and any waiver requests** with their Bid Information package to the State SRF program in order to receive funding.

The (Applicant) certifies that their contractors performing construction, alteration, maintenance and repair of the public treatment works under project number will comply with subsection 436 (a)(2) of the Consolidated Appropriations Act of 2014 and only use iron and steel products produced in the United States.

Contractor Representative	Project Applicant/Owner Representative
(print)_____	(print)_____
(sign and date)_____	(sign and date)_____
Company Name	Applicant/Owner Name and Project No.
_____	_____

AIS WAIVER INSTRUCTIONS

Approved national waivers can be found at this website:

http://water.epa.gov/grants_funding/aisrequirement.cfm

Please note that a national waiver for “*de minimis*” iron and steel components has been approved. A table is included in this document for use in documenting what items are to be considered as covered under this waiver. Note that no single *de minimis* item can be more than 1% of the total material cost of the project and the total of all *de minimis* items must not exceed 5% of the **total material cost of the project**.

Waiver Requests are provided for in subsection 436(b) of the Act. It states they will be granted if the Administrator of the EPA finds that:

- (1) Applying subsection (a) would be inconsistent with the public interest;
- (2) Iron and steel products are not produced in the United States in sufficient and reasonably available quantities and of a satisfactory quality; or
- (3) Inclusion of iron and steel products produced in the United States will increase the cost of the overall project by more than 25 percent.

A checklist of items for a complete waiver application package can be found in the EPA guidance document for AIS found here:

http://water.epa.gov/grants_funding/upload/AIS-final-guidance-3-20-14.pdf

- Submit DWSRF waiver requests to vincent.tomaino@ncdenr.gov.
- Submit CWSRF waiver requests to mark.hubbard@ncdenr.gov.

The State will forward these to the EPA for a final determination.

MATERIALS COVERED BY AIS

Lined and unlined pipes and fittings, manhole covers, municipal castings (detailed below), hydrants, tanks, flanges, pipe clamps and restraints, valves, structural steel (detailed below), reinforced precast concrete and construction materials (detailed below). Products must be composed of greater than 50% iron and steel measured by cost and permanently incorporated into the project to be subject to the provision.

<u>Municipal Castings</u>	<u>Structural Steel</u>	<u>Construction Material</u>
Access Hatches Ballast Screen Benches Bollards Cast Bases Cast Iron Hinged Hatches Cast Iron Riser Rings Catch Basin Inlet Cleanout/Monument Boxes Construction Covers and Frames Curb and Corner Guards Curb Openings Detectable Warning Plates Downspout Shoes Drainage Grates, Frames and Inlets Inlets Junction Boxes Lampposts Manhole Covers, Rings, Frames and Risers Meter Boxes Service Boxes Steel Hinged Hatches Steel Riser Rings Trash Receptacles Tree Grates Tree Guards Trench Grates Valve Boxes, Covers and Risers	Wide Flange shapes I-beams Channels Angles Tees Zees H-piles Sheet piling Tie Plates Cross Ties (note: at least one dimension must be 3 inches or greater to be subject)	Wire Rod Bar Angles Concrete Reinforcing Bar Wire Wire Cloth Wire Rope and Cables Tubing Framing Joists Trusses Fasteners Welding Rods Decking Grating Railings Stairs Access Ramps Fire Escapes Ladders Wall Panels Dome Structures Roofing Ductwork Surface Drains Cable Hanging Systems Manhole Steps Fencing and Fence Tubing Guardrails Doors Stationary Screens

Mechanical and electrical components, equipment and systems are not subject to AIS. See the EPA guidance for details.

TEMPLATE COMPLIANCE CERTIFICATIONS FOR MATERIALS COVERED BY AIS

Company Name:

Company Address:

SRF Project name and project number:

I _____, certify that the following products were produced at the following location or steps in the production of the listed products, occurred at the following location:

Location:

<u>Product</u>	<u>Step in production (Final production, melting, bending, etc.)</u>
----------------	--

1)

2)

3)

Therefore, these materials are “produced in the United States.”

(signature and title of company representative)

(date)

DE MINIMIS LIST

<u>Item</u>	<u>Cost</u>

Total *De Minimis* Cost: \$ _____

Total Material Cost For Project: \$ _____

De Minimis Cost is _____ **percent of total material costs.**

***** THIS PAGE WAS INTENTIONALLY LEFT BLANK*****

ECONOMIC IMPACT DISCLOSURE FORM

Prime Contractor: _____
Address & Phone: _____
Project: _____
Name: _____
Pay Application # _____

Please provide the names of any local suppliers or subcontractors anticipated to be used on this project. For purposes of this requirement, "local" refers to firms located within the Fayetteville Metropolitan Statistical Area (MSA), which includes Cumberland, Hoke, and Harnett Counties. This form must be fully completed **and** submitted with the bid and with each subsequent pay application.

Firm Name	SDBE, SLS, or Local	Construction Trade or Supplies	Payment Amount
<i>Ex. ABC Company</i>	<i>Local – MSA</i>	<i>Hauling</i>	<i>\$25,000.00</i>

Signature

_____, _____
Printed Name Title

Date

SECTION B - CONTRACT EXECUTION DOCUMENTS

***** THIS PAGE WAS INTENTIONALLY LEFT BLANK *****

NOTICE OF AWARD

TO: _____

PROJECT DESCRIPTION: PWC2627014 - TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

The OWNER has considered the BID submitted by you for the above described work in response to its Advertisement for Bids dated _____ and Instructions to Bidders.

You are hereby notified that your BID has been accepted for items in the amount of \$_____.

You are required by the Instructions to Bidders to execute the Agreement and furnish the required Performance Bond, Payment Bond, and Certificates of Insurance within ten (10) calendar days from the date of this NOTICE to you.

If you fail to execute said Agreement and to furnish said Bonds within ten (10) days from the date of this Notice, said Owner will be entitled to consider all your rights arising out of the OWNER's acceptance of your BID as abandoned and as a forfeiture of your Bid Bond. The Owner will be entitled to such other rights as may be granted by law.

You are required to return an acknowledged copy of this NOTICE OF AWARD to the OWNER.

Dated this _____ day of _____, 2026.

**OWNER: FAYETTEVILLE PUBLIC WORKS COMMISSION
FAYETTEVILLE, NC**

**BY: Nikole Bohannon
TITLE: Procurement Manager**

ACCEPTANCE OF AWARD

PWC2627014 – TRANSMISSION STEEL POLE REPLACEMENT FOR TOM STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

Receipt of the preceding NOTICE OF AWARD is hereby acknowledged this the _____
day of _____, 2026.

(CONTRACTOR)

By: _____

Title: _____

- END OF SECTION -

State of North Carolina
Cumberland County

CONSTRUCTION AGREEMENT

THIS CONSTRUCTION AGREEMENT ("Agreement" or "Contract") is made by and between the Fayetteville Public Works Commission ("PWC"), a North Carolina public authority, and [REDACTED] [PER THE CHARTER (SEE SEC 6A.20), THE CONSTRUCTION CONTRACT, IF MORE THAN \$500K, MUST BE BETWEEN THE CITY (BY AND THROUGH PWC) AND THE CONTRACTOR], ("Contractor"), a [REDACTED] registered to do business in North Carolina (each of PWC and Contractor is a "Party" and both are collectively the "Parties") as of the date of execution last written below (the "Effective Date"). The Parties agree as follows:

1. The Construction Project. Contractor shall furnish and bear solely the entire cost of all labor and materials necessary for the construction and/or renovation of the Project (defined hereinbelow) as specified in the Contract Documents (defined hereinbelow) and complete all Work on the Project in a Workmanlike manner in strict accordance with the Contract Documents, schedule delivery of the new materials, furnish and bear solely the entire cost of all supervision, contract administration, equipment, tools, and other means necessary to complete the Project, perform every obligation imposed by the Contract Documents, and be solely responsible for the clean-up and disposal of all materials and debris relating to or arising from the construction and renovation, subject to any exceptions that are specifically set forth in the Contract Documents. Except as otherwise specifically provided in the Contract Documents, Contractor is solely responsible for all construction means, methods, techniques, sequences, procedures, safety precautions or programs, supervising, coordinating, and performing all the Work necessary to complete the Project; provided, however, PWC shall have the right, without incurring any liability to the Contractor, to suspend Contractor's performance when a PWC employee, in his or her opinion, observes a safety violation involving a threat to life or imminent danger of bodily injury, and the suspension shall remain in effect until Contractor remedies the safety violation.

2. Terms. Capitalized terms used in this Agreement have the meaning specified below:

"Business Day" means each calendar day that is not a Saturday, Sunday, holiday observed by the federal government for its employees, or holiday observed by the State of North Carolina for its employees.

"Completion of the Project" means: (i) the Project is completed in accordance with this Agreement, except for punch list items; (ii) PWC has received any required temporary or final certificate of occupancy from the governmental agency with jurisdiction over the Project; and (iii) the registered architects or engineers (the "Designer(s)") who designed portions or components of the Project have issued certificates of Completion of the Project as to those portions or components.

"Contract Documents" means the following documents that were either made available to Contractor by PWC during the bid solicitation process (including Drawings) or executed by the Parties or both, which are all incorporated by reference herein:

- a. This Agreement
- b. General Conditions
- c. Bid Submittal Documents
- d. Contractor's Submitted Bid
- e. Bid Bond
- f. [Form of Exceptions]
- g. Notice of Award
- h. Acceptance of Award
- i. Performance Bond
- j. Payment Bond
- k. Copy of General Contractor's License
- l. Power of Attorney
- m. Certificate of Insurance
- n. Section C – Administrative Provisions
- o. Section D - Technical Specifications
- p. [Additional Specifications]
- q. [Appendices]

The following documents may be delivered or issued on or after the Effective Date of the Agreement and may not be attached to this Agreement, but are considered Contract Documents when executed by the Parties:

- r. Notice to Proceed and Acceptance of Notice
- s. Work Change Directive(s)
- t. Change Order(s)
- u. Field Order(s)

There are no Contract Documents other than those identified in this Agreement. The Contract Documents may only be amended, modified, or supplemented as provided in this Agreement in a writing signed by the Parties.

"Fault" means a breach of contract by Contractor, negligent, reckless, or intentional act(s) or omission(s) constituting a tort under applicable statutes or common law by one or more Responsible Persons, or violation(s) of applicable statute(s) or regulation(s) by a Responsible Person.

"Project" means _____, as more specifically set forth in the Contract Documents.

"Responsible Person" means the Contractor and each of its employees, agents, representatives, subcontractors, or other persons and entities for which Contractor may be liable or responsible as a result of any statutory, tort, or contractual duty.

The terms used in this Agreement shall have the meaning as stated herein and in the General Conditions. In the event of a conflict between the terms of this Agreement and any other component(s) of the Contract Documents, the terms of this Agreement shall govern.

3. Contract Price. PWC shall pay Contractor for Completion of the Project in accordance with the Contract Documents the amount identified in the accepted Bid Form of

Contractor, being in the total amount of \$ [REDACTED] (the "Price"). Contractor understands and acknowledges that the Price is derived from a specific appropriation of funds provided for the Project. Contractor agrees and acknowledges the Price is equal to the aggregate cost of all Work to be done on the Project, including all labor, materials, equipment, apparatus, and supplies, set in accordance with the amount specified on the Bid Form submitted by Contractor and accepted by PWC.

4. Contract Times. The Parties shall perform their obligations under this Agreement in compliance with all scheduling deadlines set forth in the Contract Documents. The Contractor shall commence the Work to be performed under this Agreement on a date to be specified in accordance with the Notice to Proceed issued by PWC. Contractor shall achieve Completion of the Project no later than **360 consecutive calendar days** from said date plus any modifications thereof allowed in accordance with the Contract Documents (the "Completion Date").

5. Payment. PWC shall pay Contractor in installment payments plus a final payment, as set forth in the Contract Documents. For each applicable installment payment, Contractor shall submit an application for payment in accordance with the Contract Documents. An application for payment will be processed by PWC as provided in the Contract Documents. Such installment payments shall reflect the actual Cost of the Work, not to exceed in total the Price, and the allocable portion of the total Price for said installment. PWC shall make payment to the Contractor, less any applicable retainage set forth in the Contract Documents; provided, however, that PWC may withhold all or a portion of a payment on account of (1) incomplete Work, (2) defective or nonconforming Work, (3) claims filed or a reasonable basis to believe that such claims will be filed imminently, (4) failure of the Contractor to make payments properly for labor, services, materials, equipment or subcontracts, (5) damages caused to PWC or another party by one or more Responsible Persons, or (6) failure to comply with the terms and conditions of this Agreement. In the final payment, PWC shall pay the balance of the Price, including all retained amounts, less any Liquidated Damages and other applicable damage and claim amounts, to Contractor within forty-five (45) days of Completion of the Project; provided, however, that PWC may withhold a reasonable sum from the final payment to ensure correction of any final items or condition on the Project.

6. Retainage. Subject to any restrictions applicable to any federal grant funds that may be utilized for the Project, PWC may, in its discretion, retain up to five percent (5%) of any periodic payment due Contractor; provided, however, when the Project is fifty percent (50%) complete, PWC, with written consent of the surety, shall not retain any further retainage from periodic payments due Contractor if Contractor continues to perform satisfactorily and any nonconforming Work identified in writing prior to that time by PWC or the Designer has been corrected by Contractor and accepted by PWC or the Designer, and provided further that full payment, less authorized deductions, shall also be made for those line item trades that have reached one hundred percent (100%) completion of their contract obligations by or before the Project is fifty percent (50%) complete if Contractor has performed satisfactorily in accordance with G.S. 143-134.1(b2), contingent upon PWC's receipt of an approval or certification from the Designer that the Work performed by the subcontractor is acceptable and in accordance with the Contract Documents. If PWC determines Contractor's performance is unsatisfactory, PWC may, in its discretion, reinstate retainage for each subsequent periodic application for payment as authorized in this Section up to the maximum amount of five percent (5%). The Project shall be deemed fifty percent (50%) complete when Contractor's gross project invoices, excluding the value of materials stored off-site, equal or exceed fifty percent (50%) of the Price, except the value of materials stored on-site shall not exceed twenty percent (20%) of Contractor's gross project invoices for the purpose of determining whether the Project is fifty percent (50%)

complete. Within 60 days after the submission of a pay request and one of the following occurs, as specified in the Contract Documents, PWC, with written consent of the surety, shall release to Contractor all retainage on payments held by PWC: (i) PWC receives a certificate of Substantial Completion from the Designer in charge of the Project; or (ii) PWC receives beneficial occupancy or use of the Project; provided, however, PWC may in its discretion retain sufficient funds to secure Completion of the Project or corrections on any Work. If PWC retains funds, the amount retained shall not exceed two and one-half times the estimated value of the Work to be completed or corrected. Any reduction in the amount of the retainage on payments shall be with the consent of Contractor's surety. The existence of any third-party claims against Contractor or any additive change orders to the Construction Documents shall not be a basis for delaying the release of any retainage on payments. Notwithstanding anything in this Section to the contrary, following fifty percent (50%) completion of the Project, PWC shall be authorized to withhold additional retainage from a subsequent periodic payment, not to exceed five percent (5%), in order to allow PWC to retain two and one-half percent (2.5%) total retainage through the Completion of the Project. In the event that PWC elects to withhold additional retainage on any periodic payment subsequent to release of retainage on a line-item of Work pursuant to G.S. 143-134.1(b2), Contractor may also withhold from the subcontractors remaining on the project sufficient retainage to offset the additional retainage held by PWC, notwithstanding the actual percentage of retainage withheld by PWC of the Project as a whole. Neither PWC's nor Contractor's release of retainage on payments as part of a payment in full on a line-item of Work pursuant to G.S. 143-134.1(b2) shall affect any applicable warranties on Work done by Contractor or subcontractor, and the warranties shall not begin to run any earlier than either PWC's receipt of a certificate of Substantial Completion from the Designer in charge of the Project or PWC receives beneficial occupancy.

7. Liquidated Damages. Time is of the essence with respect to performance of each of the Parties' obligations under this Agreement. Contractor recognizes and acknowledges that PWC will suffer financial and other losses if the Project is not completed by the Completion Date. The Parties recognize and agree that the delays, expense, and difficulties involved in proving in a legal or arbitration proceeding the actual loss suffered by PWC if the Project is not completed by the Completion Date. Accordingly, instead of requiring any such proof, Contractor and PWC agree that in the event Contractor fails to achieve Completion of the Project by the Completion Date, Contractor shall pay to PWC as liquidated damages to compensate PWC for damages related to the delayed Completion of the Project one thousand dollars (\$1000.00) per day ("Liquidated Damages") for each calendar day Contractor fails to achieve Completion of the Project by the Completion Date.

8. Contractor's Representations and Warranties. In order to induce PWC to enter into this Agreement, Contractor makes the following representations and warranties to PWC:

a. Contractor is duly licensed in the State of North Carolina to complete all Work necessary for the Project, is duly organized, validly existing and in good standing and has all requisite powers, rights, and authority to execute, enter into, and perform this Agreement in accordance with the terms and conditions of this Agreement, and this Agreement constitutes a legal, valid, and binding obligation of Contractor enforceable against it in accordance with its terms.

b. Contractor has read the Contract Documents, and acknowledges and understands all data, materials, specifications, and requirements identified in the Contract Documents.

c. Contractor has visited the site for the Project, conducted a thorough, visual examination of the site and adjacent areas, and become familiar with and is satisfied as to the general, local, and site conditions that may affect cost, progress, and performance in completing the Project. Contractor is familiar with and is satisfied as to all laws and regulations that may affect cost, progress, and performance to complete the Project.

d. Contractor has carefully studied all: (1) reports of explorations and tests of subsurface conditions at or adjacent to the site and all drawings of physical conditions relating to existing surface or subsurface structures at the site that have been identified in the Contract Documents and any accompanying reports and drawings, and (2) reports and drawings relating to hazardous environmental conditions, if any, at or adjacent to the site that have been identified in the Contract Documents and any accompanying reports and drawings.

e. Contractor has considered the information known to Contractor itself; information commonly known to contractors doing business in the locality of the Site; information and observations obtained from visits to the Site; the Contract Documents; and the Site-related reports and drawings identified in the Contract Documents, if any, with respect to the effect of such information, observations, and documents on (1) the cost, progress, and performance of the Work; (2) the means, methods, techniques, sequences, and procedures of construction to be employed by Contractor; and (3) Contractor's safety precautions and programs.

f. Based on the information and observations referred to in subsection e. of this Section, Contractor agrees that no further examinations, investigations, explorations, tests, studies, or data are necessary for the performance of the Work at the Price commencing on the commencement date and in accordance with the other terms and conditions of the Contract.

g. Contractor is aware of the general nature of Work to be performed by PWC and others at the Site that relates to the Work as indicated in the Contract Documents.

h. Contractor has given PWC's Designer written notice of all conflicts, errors, ambiguities, or discrepancies that Contractor has discovered in the Contract Documents, and the written resolution thereof by the Designer is acceptable to Contractor.

i. The Contract Documents are generally sufficient to indicate and convey understanding of all terms and conditions for performance and furnishing of the Work.

j. Contractor's entry into this Agreement constitutes an incontrovertible representation by Contractor that, without exception, all prices in the Agreement are premised upon performing and furnishing the Work required by the Contract Documents.

k. Contractor has no business or personal relationship with any PWC Commissioner, officer, director, manager, or supervisor and Contractor covenants to disclose immediately to PWC any such relationship that develops

during the performance of Work on the Project.

9. Contractor's Payment Obligations. Contractor shall pay all of its obligations arising out of or in connection with the Project in a timely manner to all persons supplying materials in the prosecution of the Work and to all laborers and others employed thereon.

10. Performance and Payment Bonds. Contractor shall obtain and deliver to PWC a performance bond in the amount of one hundred percent (100%) of the Price, conditioned upon the faithful performance of the Project and all Work in accordance with the Contract Documents, which bond shall be solely for the protection of PWC. Contractor shall obtain and deliver to PWC a payment bond in the amount of one hundred percent (100%) of the Price, conditioned upon the prompt payment for all labor or materials for which the Contractor or one or more of its subcontractors is liable, which payment bond shall be solely for the protection of the persons furnishing materials or performing labor for which the Contractor is liable. The performance bond and the payment bond shall be executed by one or more surety companies legally authorized to do business in the State of North Carolina, shall become effective upon the awarding of the construction contract by PWC to Contractor, and shall at all times comply with the requirements set forth in Article 3 of North Carolina General Statutes Chapter 44A. In the event PWC deems the surety or sureties upon any bond necessary for this Agreement and the completion of the Project, or if for any reason, such bond ceases to be adequate to cover the performance and/or payment of the Work, Contractor shall, at its expense, within five (5) days after the receipt of notice from PWC, furnish an additional bond or bonds in such form and amount, and with such surety or sureties as shall be satisfactory to PWC. In such event no further payment to Contractor shall be deemed to be due under this Agreement until new or additional security for the performance and payment of the Project shall be furnished in manner and form satisfactory to PWC. Contractor understands and acknowledges that PWC, as a public authority, is not subject to the provisions of Articles 1 and 2 of Chapter 44A of the General Statutes, in accordance with G.S. 44A-34 and applicable law.

11. Contractor's Damage Repair Obligations. Contractor shall be responsible for all damages to the property of the City of Fayetteville and of PWC that may result from the normal procedure of a Responsible Person's actions in the prosecution of the Work or that may be caused by or result from the negligence of a Responsible Person during the progress of or connected with the prosecution of the Work, whether within the limits of the Work or elsewhere. Contractor shall promptly restore all such property so damaged to a condition as good as it was immediately prior to Contractor initiating the Work on the Project.

12. Defective Work. The Project shall be subject to observation and approval by PWC, Designer, and representatives of governmental agencies with jurisdiction over the Project. PWC and Designer shall be entitled to enter at all reasonable times the premises subject to construction or renovation to inspect the Work performed by or on behalf of Contractor, provided that such entry and inspection does not materially interfere with the progress of construction. Contractor shall correct promptly, at no cost to PWC, all Work reasonably rejected by PWC or by its representatives. Should Contractor fail to correct rejected Work, PWC may, acting in its sole discretion, correct such Work and the Contractor shall pay PWC's actual costs of correction and any other applicable amounts identified in the Contract Documents.

13. As-Built Drawings. Contractor shall maintain during the progress of the Project as-built drawings indicating the current status of the Project as actually performed. Upon Completion of the Project, Contractor shall prepare a final version of such as-built drawings and

submit them to PWC for approval.

14. Assignment. This Agreement shall be binding upon and inure to the benefit of the Parties, their legal representatives, successors, and assigns. Contractor may not assign, transfer, convey, or encumber, whether voluntarily or by operation of law, this Agreement or any obligations, rights under, or interests in this Agreement to a third party without the prior written consent of PWC; and, specifically, but without limitation, money that may become due and money that is due may not be assigned without such consent (except to the extent that the effect of this restriction may be limited by law), and unless specifically stated to the contrary in any written consent to an assignment, no assignment will release or discharge the assignor from any duty or responsibility under the Contract Documents.

15. Indemnity. Contractor shall indemnify, defend, and hold harmless PWC and its Commissioners, officers, employees, agents, and representatives and the City of Fayetteville and its elected officials, managers, employees, agents, and representatives and Design Engineer (collectively "Indemnitees") from and against all claims, actions, liabilities, damages, losses, costs, and expenses (including, without limitation, injury to or death of any persons and damage to property, economic and consequential damages and attorneys' fees) asserted by one or more third parties against one or more of the Indemnitees if the Fault of one or more Responsible Persons is a proximate cause of the loss, damage, or expense indemnified. Contractor's obligation to indemnify, defend, and hold harmless the Indemnitees shall survive the termination of this Agreement.

16. Insurance. Contractor shall maintain during the Work and for at least three (3) years following Completion of the Project the insurance coverage set forth in the Contract Documents, which insurance shall be placed with insurance companies authorized to do business in the State of North Carolina and rated A minus VII or better by the current edition of Best's Key Rating Guide or otherwise approved in writing by PWC. Prior to initiating any Work, Contractor shall deliver certificates of insurance confirming each such coverage required by the Contract Documents, and Contractor shall direct its insurers to provide annually to PWC certificates confirming each such coverage during the coverage period. PWC shall be named as an additional insured in the comprehensive automobile and commercial liability insurance policies. Commercial general liability coverage shall be written on an "occurrence" basis. Contractor shall not reduce or allow the required insurance coverages to lapse without PWC's prior written approval. All policies for insurance must be endorsed to contain a provision giving PWC a thirty (30) calendar day prior written notice by certified mail of any cancellation of that policy or material reduction in coverage. Should a notice of cancellation be issued for non-payment of premiums or any part thereof, or should Contractor fail to provide and maintain certificates as set forth herein, PWC shall have the right, but shall not have the obligation, to pay such premium to the insurance company or to obtain such coverage and to deduct such payment from any sums that may be due or become due to Contractor, or to seek reimbursement for said payments from Contractor. Any such sums paid by PWC shall be due and payable immediately by Contractor upon notice from PWC. The insurance provisions of this Agreement shall not be construed as a limitation on Contractor's responsibilities and liabilities pursuant to the terms and conditions of this Agreement. Contractor's obligation to maintain insurance for three (3) years after Completion of the Project shall survive the termination of this Agreement.

17. Warranty. The Contractor hereby grants to PWC a warranty on all materials and Workmanship involved in the Project for a period of one (1) year from the Completion Date and a period of two (2) years from the Completion Date for any latent structural defects. PWC shall

give written notice to Contractor of any claim under this Section within the time specified hereinabove. This warranty shall be in addition to, and not in derogation of, all other rights and privileges which PWC may have under law, equity, or instrument, and shall survive the Completion Date and the final settlement and shall be binding on Contractor notwithstanding any provision in any other writing executed by PWC heretofore or contemporaneous with the execution of the Agreement or prior to the Completion Date.

18. Waiver. No failure on the part of any party to exercise, and no delay in exercising, any right, power, or privilege hereunder shall operate as a waiver thereof, nor shall any single or partial exercise of any right hereunder preclude any other or further cumulative and not exclusive of any remedies provided by law. This Agreement shall be binding upon and inure to the benefit of the parties, their legal representatives, successors, and assigns. This Agreement may not be assigned, transferred, conveyed, or encumbered, whether voluntarily or by operation of law, by either party without the prior written consent of the other party, which consent shall not be unreasonably withheld.

19. Law. THIS AGREEMENT SHALL BE GOVERNED BY AND INTERPRETED AND ENFORCED IN ACCORDANCE WITH THE LAWS OF THE STATE OF NORTH CAROLINA WITHOUT GIVING EFFECT TO THE CHOICE OF LAW PROVISIONS THEREOF. The Contractor shall at all times comply with all applicable Federal, state, and local laws and building codes in the performance of its obligations under the Agreement.

20. Dispute Resolution. In the event of any dispute, controversy, or claim of any kind or nature arising under or in connection with this Agreement (a "Dispute") and involving any two or more of the following parties, PWC, Designer, Contractor or any subcontractor of Contractor, the party initiating the Dispute shall serve written notice of a Dispute on the party(ies) to the dispute, and those parties shall endeavor to settle the dispute first through direct, informal discussions between the parties' selected representatives. Any such representative(s) shall have binding authority to settle the Dispute. In the event the parties do not settle the Dispute within ten (10) days from the date of written notice of the Dispute, any party to the Dispute may, by written notice to the other party(ies), engage a mediator certified under the laws of the State of North Carolina to mediate the Dispute within thirty (30) days of such notice. The parties to the Dispute shall attend mediation in good faith. In the event mediation is unsuccessful, any party to the dispute may initiate arbitration proceedings. Any controversy or claim arising out of or relating to the Contract Documents, or the breach thereof, shall be settled by binding arbitration administered by the American Arbitration Association under its Construction Industry Arbitration Rules, and judgment on the award rendered by the arbitrator(s) may be entered in any court having jurisdiction thereof. All of the foregoing dispute resolution procedures shall be held in Cumberland County, North Carolina. The costs of the mediator and arbitrator in a dispute resolution process shall be divided equally among the parties to the process; provided, however, PWC shall bear at least one-third of the cost if PWC is a party to the dispute resolution and the remainder of the cost shall be divided equally among the other parties participating in the dispute resolution. PWC shall, in its contractual arrangements with Designer, and Contractor shall, in its contracts with subcontractors and they in their contracts with lower-tier subcontractors authorize and direct such parties to participate in the dispute resolution procedures set forth in this Section. Unless otherwise directed in writing by PWC, Contractor shall continue the Project and maintain compliance with the scheduling deadlines set forth in the Contract Documents during any dispute resolution proceedings. If Contractor continues to perform, PWC shall make payments due for the continued performance in accordance with this Agreement. The provisions of this Section shall not extend any applicable statutes of limitation or repose.

21. Execution; Modification; Entire Agreement; Severability. This Agreement may be executed in counterparts with the same effect as if the signatures to each counterpart were upon a single instrument, and all such counterparts together shall be deemed an original of this Agreement. For purposes of this Agreement, a facsimile copy or scanned copy or photocopy of a party's signature shall be sufficient to bind such party. This Agreement shall be subject to execution by electronic means in accordance with Article 40 of Chapter 66 of the North Carolina General Statutes. No oral communication, promise, understanding, or agreement before, contemporaneous with, or after the execution of this Agreement shall affect or modify any of the terms and conditions and obligations of the Contract Documents. The Contract Documents shall be modified only by a subsequent writing signed by both Parties. The Contract Documents shall be conclusively considered to contain and express all the terms and conditions agreed upon by the Parties, notwithstanding any prior or contemporaneous written communication, promise, understanding or agreement. Should any provision of this Agreement or any of the Contract Documents at any time be in conflict with any law, statute, rule, regulation, order, or ruling and thus be unenforceable, or be unenforceable for any other reason, then the remaining provisions of this Agreement shall remain in full force and effect and the court or arbitrator shall give the offending provision the fullest meaning and effect permitted by law. The titles of the Sections throughout this Agreement are for convenience only and the words contained therein shall in no way be held to explain, modify, amplify or aid in the interpretation, construction, or meaning of the provisions of this instrument.

22. Notices. Any notice which either Party is required or desires to give the other hereunder shall be deemed sufficiently given if, in writing, it is delivered personally, or sent by certified U.S. mail, return-receipt requested, postage prepaid, to the addresses listed herein below, or such other address as either Party shall give to the other Party by written notice in accordance herewith. Any notice given herein by personal delivery shall be deemed delivered when received. Any properly addressed notice given herein by certified mail shall be deemed delivered on third Business Day after the same is deposited in an official United States Post Office, postage prepaid, or if sooner upon the date when the return receipt therefore is signed, or refusal to accept the mailing by the addressee is noted thereon by the postal authorities.

To PWC:
Fayetteville Public Works Commission
Attn: Timothy Bryant, CEO/General Manager
PO Box 1089
Fayetteville, NC 28302

To Contractor:

23. Termination. PWC may terminate this Agreement immediately if during the progress of the Work or during the warranty period, the Contractor:

- a. Persistently fails to prosecute the Work properly and in accordance with this contract, including but not limited to include failure to provide sufficient crews, equipment, or resources, or failure to adhere to the schedule;

- b. Demonstrates disregard for the policies, procedures, or requirements of PWC;
- c. Demonstrates complete disregard of the authority of PWC or its designated representatives; or
- d. Violates in any substantial way the provisions and requirements of this Agreement.

Such termination shall be effective upon written notice to Contractor and its surety. PWC may terminate the contract for its convenience by providing Contractor at least seven (7) calendar days prior written notice, in which event Contractor shall be paid for all Work completed, plus other expenses as mutually agreed upon between PWC and Contractor.

24. Compliance. Contractor hereby acknowledges that "E-Verify" is the federal E-Verify program operated by the US Department of Homeland Security and other federal agencies which is used to verify the Work authorization of newly hired employees pursuant to federal law and in accordance with Article 2, Chapter 64 of the North Carolina General Statutes. Contractor further acknowledges that all employers, as defined by Article 2, Chapter 64 of the North Carolina General Statutes, must use E-Verify and after hiring an employee to Work in the United States, shall verify the Work authorization of the employee through E-Verify in accordance with N.C.G.S. §64-26(a). Contractor hereby pledges, attests, and warrants through execution of this Agreement that Contractor complies with the requirements of Article 2, Chapter 64 of the North Carolina General Statutes and further pledges, attests, and warrants that all subcontractors currently employed by or subsequently hired by Contractor shall comply with all E-Verify requirements. Failure to comply with the above requirements shall be considered a breach of this Agreement. Contractor hereby further acknowledges that the execution and delivery of this Agreement constitutes Contractor's certification to PWC and to the North Carolina State Treasurer that, as of the date of the Effective Date of this Agreement, Contractor is not listed on (a) the Final Divestment List created and maintained by the North Carolina Department of State Treasurer pursuant to the Iran Divestment Act of 2015, Chapter 147, Article 6E of the General Statutes of North Carolina (the "Iran Divestment Act"); or (b) the list of companies that the North Carolina State Treasurer determines to be engaged in a boycott of Israel in accordance with Article 6G of Chapter 147 of the General Statutes of North Carolina. Contractor represents and warrants to Commission that Contractor, and all persons and entities owning (directly or indirectly) an ownership interest in it: (i) are not, and will not become, a person or entity with whom a party is restricted from doing business with under regulations of the Office of Foreign Asset Control ("OFAC") of the Department of the Treasury (including, but not limited to, those named on OFAC's Specially Designated and Blocked Persons list) or under any statute, executive order (including, but not limited to, the September 24, 2001, Executive Order 13224 Blocking Property and Prohibiting Transactions with Persons Who Commit, Threaten to Commit, or Support Terrorism), or other governmental action; and (ii) are not knowingly engaged in, and will not knowingly engage in, any dealings or transactions or be otherwise associated with such persons or entities described in clause (i) above. Contractor also shall at all times during the term of this Agreement comply with Executive Order 11246, including but not limited to the Equal Opportunity Clause requirements set forth in 41 C.F.R. § 60-1.4. Contractor shall abide by the requirements of 41 CFR 60-300.5(a) and 60-741.5(a) prohibiting discrimination against qualified individuals on the basis of protected veteran status or disability and requiring affirmative action by covered prime contractors and subcontractors to employ and advance in employment qualified protected veterans and individuals with disabilities.

IN WITNESS WHEREOF, the Parties have executed this Agreement by their duly authorized representatives.

Fayetteville Public Works Commission

CONTRACTOR

[PER OUR CHARTER (SEE SEC 6A.20),
THE CONSTRUCTION CONTRACT, IF MORE
THAN \$500K, MUST BE BETWEEN THE CITY
(BY AND THROUGH PWC) AND THE CONTRACTOR]

By: _____
Timothy Bryant, CEO/GM

By: _____

(Printed Name, Title)

Date: _____

Date: _____

This instrument has been preaudited in the manner required by the Local Government Budget and Fiscal Control Act (N.C. Gen. Stat. § 159-1 et seq.).

By: _____
Rhonda Haskins, Chief Financial Officer

Approved as to form:

Legal Dept.



GENERAL CONDITIONS FOR
FAYETTEVILLE PUBLIC WORKS COMMISSION

General Conditions	5
Article I. Definitions and Terminology	5
Section 1.01 Definitions	5
Section 1.02 Terminology	10
Article II. Preliminary Matters	11
Section 2.01 Delivery of Bonds and Evidence of Insurance	11
Section 2.02 Copies of Documents	11
Section 2.03 Before Starting any Work	12
Section 2.04 Preconstruction Conference; Designation of Authorized Representatives	12
Section 2.05 Initial Acceptance of Schedules	12
Section 2.06 Electronic Transmittals	13
Article III. Contract Documents: Intent, Requirements, Reuse	13
Section 3.01 Intent	13
Section 3.02 Reference Standards	13
Section 3.03 Reporting and Resolving Discrepancies	14
Section 3.04 Reuse of Documents	15
Article IV. Commencement and Progress of the Work	15
Section 4.01 Commencement of Work	15
Section 4.02 Reference Points	15
Section 4.03 Progress Schedule	16
Section 4.04 Delays in Contractor's Progress	16
Article V. Availability of Lands; Subsurface and Physical Conditions; Hazardous Environmental Conditions	16
Section 5.01 Availability of Lands	16
Section 5.02 Use of Site and Other Areas	17
Section 5.03 Differing Subsurface or Physical Conditions or Underground Facilities	17
Section 5.04 Underground Utilities	19
Section 5.05 Hazardous Environmental Conditions at Site	21
Article VI. Bonds and Insurance	21
Section 6.01 Performance and Payment Bonds	21
Section 6.02 Insurance	22
Article VII. Contractor's Responsibilities	23
Section 7.01 Supervision and Superintendence	23
Section 7.02 Labor; Working Hours	24
Section 7.03 Services, Materials, and Equipment	25
Section 7.04 "Or Equals"	25
Section 7.05 Concerning Subcontractors, Suppliers, and Others	26
Section 7.06 Patent Fees and Royalties	27

General Conditions (Rev 7/11/2023)

Section 7.07	Permits	27
Section 7.08	Taxes	27
Section 7.09	Laws and Regulations	27
Section 7.10	Record Documents.....	28
Section 7.11	Safety and Protection	28
Section 7.12	Emergencies.....	29
Section 7.13	Shop Drawings, Samples, and Other Submittals	29
Section 7.14	Contractor's General Warranty and Guarantee.....	31
Section 7.15	Indemnification	32
Section 7.16	Claims Procedure	32
Section 7.17	Delegation of Professional Design Services	33
Article VIII.	PWC's Responsibilities	34
Article IX.	Amending the Contract Documents; Changes in the Work.....	34
Section 9.01	Amending and Supplementing Contract Documents.....	34
Section 9.02	PWC-Authorized Changes in the Work.....	35
Section 9.03	Unauthorized Changes in the Work	35
Section 9.04	Change of Contract Price.....	35
Section 9.05	Change of Contract Times	36
Section 9.06	Change Proposals	36
Section 9.07	Execution of Change Orders.....	37
Section 9.08	Notification to Surety.....	37
Article X.	Tests, Inspections, and Approvals; Correction, Removal, or Acceptance of Defective Work.....	37
Section 10.01	Access to Work.....	37
Section 10.02	Tests, Inspections, and Approvals	37
Section 10.03	Defective Work	38
Section 10.04	Acceptance of Defective Work.....	39
Section 10.05	Uncovering Work	39
Section 10.06	PWC May Stop the Work.....	40
Section 10.07	PWC May Correct Defective Work.....	40
Article XI.	Claims.....	40
Section 11.01	Claims Process.....	40
Section 11.02	Submittal of Claim	41
Section 11.03	Review and Resolution	41
Section 11.04	Dispute Resolution.....	41
Article XII.	Payments to Contractor; Set-Offs; Completion; Correction Period.....	42
Section 12.01	Progress Payments	42
Section 12.02	Substantial Completion.....	44

General Conditions (Rev 7/11/2023)

Section 12.03	Partial Use or Occupancy	45
Section 12.04	Final Inspection	46
Section 12.05	Final Payment.....	46
Section 12.06	Waiver of Claims	47
Section 12.07	Correction Period.....	47
Article XIII.	Suspension of Work and Termination	48
Section 13.01	PWC May Suspend Work	48
Section 13.02	PWC May Terminate for Cause	48
Section 13.03	PWC May Terminate For Convenience.....	49
Section 13.04	Contractor May Stop Work or Terminate.....	49
Section 13.05	Morality.....	50
Article XIV.	Miscellaneous	50
Section 14.01	Additional General Terms and Conditions.....	50
Section 14.02	Giving Notice	50
Section 14.03	Computation of Times.....	50
Section 14.04	Cumulative Remedies.....	50
Section 14.05	Limitation of Damages	51
Section 14.06	No Waiver.....	51
Section 14.07	Survival of Obligations	51
Section 14.08	Controlling Law	51
Section 14.09	Headings	51

General Conditions

Article I. Definitions and Terminology

Section 1.01 Definitions

Capitalized terms used in the Bid Documents or Contract Documents, including the singular and plural forms, shall have the meaning indicated in the definitions below. In addition to terms specifically defined below, terms with initial capital letters in the Contract Documents include references to identified articles and paragraphs, and the titles of other documents or forms.

- (a) **Addenda**—Written or graphic instruments issued before the opening of Bids which clarify, correct, or change the Bid Documents or other Contract Documents.
- (b) **Agreement**—The written instrument, executed by PWC and Contractor, that sets forth the Contract Price and Contract Times, identifies the parties, designates the specific documents that encompass the Contract Documents, and provides other material provisions that govern the relationship between the parties as it relates to the Project. The Agreement is also referred to, and titled as, the “Construction Agreement.”
- (c) **Application for Payment**—The form that Contractor shall use during the Work in requesting progress or final payments. Any Application for Payment shall be accompanied by such supporting documentation as is required by the Contract Documents.
- (d) **Bid**—The offer of a Bidder submitted on the prescribed form setting forth the prices for the Work to be performed.
- (e) **Bidder**—An individual or entity that submits a Bid to PWC for the Project.
- (f) **Bid Documents**—The Bidding Requirements, the proposed Contract Documents, and all Addenda.
- (g) **Bidding Requirements**—The Invitation to Bid, Instructions to Bidders, Bid Bond or other Bid security, if any, the Bid Form, and the Bidder’s original Bid with any requisite attachments.
- (h) **Business Day**—each calendar day that is not a Saturday, Sunday, or holiday observed by PWC (New Year’s Day, Martin Luther King, Jr. Day, Good Friday, Memorial Day, Independence Day, Labor Day, Veteran’s Day, Thanksgiving Day (and the day after), and Christmas (2 days) for its employees.
- (i) **Change Order**—A document that is signed by Contractor and PWC, which authorizes an addition, deletion, or revision in the Work, an adjustment in the Contract Price or the Contract Times, a change in the scope of the Project, or other revision to the Agreement, issued on or after the Effective Date of the Agreement.
- (j) **Change Proposal**—A written request by Contractor, submitted in compliance with the procedural requirements set forth in the Contract Documents, seeking an adjustment in Contract Price or Contract Times, or both; contesting an initial decision by PWC concerning the requirements of the Contract Documents or the acceptability of Work under the Contract Documents; challenging a set-off against payments due; or seeking other relief with respect to the terms of the Agreement.

- (k) Completion of the Project—Has the meaning as set forth in the Construction Agreement.
- (l) Constituent of Concern—Asbestos, petroleum, radioactive materials, polychlorinated biphenyls (PCBs), hazardous waste, and any substance, product, waste, or other material of any nature whatsoever that is or becomes listed, regulated, or addressed pursuant to (a) the Comprehensive Environmental Response, Compensation and Liability Act, 42 U.S.C. §§9601 et seq. (“CERCLA”); (b) the Hazardous Materials Transportation Act, 49 U.S.C. §§5101 et seq.; (c) the Resource Conservation and Recovery Act, 42 U.S.C. §§6901 et seq. (“RCRA”); (d) the Toxic Substances Control Act, 15 U.S.C. §§2601 et seq.; (e) the Clean Water Act, 33 U.S.C. §§1251 et seq.; (f) the Clean Air Act, 42 U.S.C. §§7401 et seq.; or (g) any other federal, state, or local statute, law, rule, regulation, ordinance, resolution, code, order, or decree regulating, relating to, or imposing liability or standards of conduct concerning, any hazardous, toxic, or dangerous waste, substance, or material.
- (m) Contract Price—The money that PWC has agreed to pay Contractor for Completion of the Project in accordance with the Contract Documents. May also be referred to as “Price” throughout the Contract Documents.
- (n) Contract Times—The number of days or the dates by which Contractor shall: (a) achieve Milestones, if any; and (b) Completion of the Project.
- (o) Contractor—The individual or entity with which PWC has contracted for performance of the Work and Completion of the Project.
- (p) **Cost of the Work**
 - A. Costs Included: To determine Cost of the Work when Cost of the Work is a component of the Contract Price, except as otherwise may be agreed to in writing by PWC, costs included in the Cost of the Work shall be in amounts no higher than those prevailing in the locality of the Project, shall not include any of the excluded costs specifically itemized below, and shall include only the following items:
 - (i) Payroll costs for employees in the direct employ of Contractor in the performance of the Work under schedules of job classifications agreed upon by Owner and Contractor. Payroll costs for employees not employed full time on the Work shall be apportioned on the basis of their time spent on the Work. Payroll costs shall include, but not be limited to, salaries and wages plus the cost of fringe benefits, which shall include social security contributions, unemployment, excise, and payroll taxes, workers’ compensation, health and retirement benefits, bonuses, sick leave, and vacation and holiday pay applicable thereto. The expenses of performing Work outside of regular working hours, on Saturday, Sunday, or legal holidays, shall be included in the above to the extent authorized by Owner.
 - (ii) Cost of all materials and equipment furnished and incorporated in the Work, including costs of transportation and storage thereof, and Suppliers’ field services required in connection therewith. All trade discounts, rebates, and refunds and returns from sale of surplus materials and equipment shall accrue to Owner, and Contractor shall make provisions so that they may be obtained.
 - (iii) Payments made by Contractor to Subcontractors for Work performed by Subcontractors. If any subcontract provides that the Subcontractor is to be paid on the basis of Cost of the Work plus a fee, the Subcontractor’s Cost of the Work and

fee shall be determined in the same manner as Contractor's Cost of the Work and fee as provided in this subsection (p).

(iv) Supplemental costs including the following:

- a. Rentals of all construction equipment and machinery, and the parts thereof, whether rented from Contractor or others in accordance with rental agreements approved by Owner. All such costs shall be in accordance with the terms of said rental agreements. The rental of any such equipment, machinery, or parts shall cease when the use thereof is no longer necessary for the Work.
- b. Sales, consumer, use, and other similar taxes related to the Work, and for which Contractor is liable, as imposed by Laws and Regulations.
- c. The cost of utilities, fuel, and sanitary facilities at the Site.
- d. The costs of premiums for all bonds and insurance that Contractor is required by the Contract Documents to purchase and maintain.

B. Costs Excluded: The term Cost of the Work shall not include any of the following items:

(i) Payroll costs and other compensation of Contractor's officers, executives, principals (of partnerships and sole proprietorships), general managers, safety managers, engineers, architects, estimators, attorneys, auditors, accountants, purchasing and contracting agents, expeditors, timekeepers, clerks, and other personnel employed by Contractor, whether at the Site or in Contractor's principal or branch office for general administration of the Work and not specifically included in the agreed upon schedule of job classifications agreed upon by Owner and Contractor. The payroll costs and other compensation excluded here are to be considered administrative costs covered by the Contractor's fee.

(ii) Expenses of Contractor's principal and branch offices other than Contractor's office at the Site.

(iii) Any part of Contractor's capital expenses, including interest on Contractor's capital employed for the Work and charges against Contractor for delinquent payments.

(iv) Costs due to the negligence of Contractor, any Subcontractor, or anyone directly or indirectly employed by any of them or for whose acts any of them may be liable, including but not limited to, the correction of defective Work, disposal of materials or equipment wrongly supplied, and making good any damage to property.

(v) Other overhead or general expense costs of any kind and the costs of any item not specifically and expressly included herein.

(vi) Contractor's fee.

A. Documentation: Whenever the Cost of the Work for any purpose is to be determined pursuant to this Article 13, Contractor will establish and maintain records of the Cost of Work in accordance with generally accepted accounting practices and submit in a form acceptable to PWC an itemized cost breakdown together with supporting data.

(q) Day—a calendar day of 24 hours measured from midnight to the next midnight. Also referred to throughout the Contract Documents as "days" or "calendar days."

- (r) Design Engineer—The Engineering firm identified on the Contract Drawings and their duly authorized employees and agents, such employees and agents acting within the scope of the particular duties entrusted to them in each case.
- (s) Drawings—The part of the Contract that graphically shows the scope, extent, and character of the Work to be performed by Contractor.
- (t) Field Order—A written order issued by Project Engineer which requires minor changes in the Work but does not change the Contract Price or the Contract Times.
- (u) Final Completion—The day the on which any specified Work is complete in accordance with the Contract Documents.
- (v) Hazardous Environmental Condition—The presence at the Site of Constituents of Concern in such quantities or circumstances that may present a danger to persons or property exposed thereto. The presence at the Site of materials that are necessary for the execution of the Work, or that are to be incorporated in the Work, and that are controlled and contained pursuant to industry practices, Laws and Regulations, and the requirements of the Contract Documents, does not establish a Hazardous Environmental Condition.
- (w) Laws and Regulations; Laws or Regulations—Any and all applicable laws, statutes, rules, regulations, ordinances, codes, and orders of any and all governmental bodies, agencies, authorities, and courts having jurisdiction. Such terms, unless otherwise specified, shall refer to North Carolina laws and regulations.
- (x) Milestone—A principal event in the performance of the Work that the Agreement requires Contractor to achieve by an intermediate completion date or by a time prior to Completion of the Project.
- (y) Non-Compliance Notice—A written notice issued by PWC to Contractor indicating a violation of any term, provision, or requirement of the Contract Documents.
- (z) Notice of Award—The written notice by PWC to a Bidder providing of PWC's acceptance of the Bid upon timely compliance by the Bidder with any conditions precedent provided in the notice.
- (aa) Notice to Proceed—A written notice by PWC to Contractor fixing the date on which the Contract Times will commence to run and on which Contractor shall start to perform the Work.
- (bb) Progress Schedule—A schedule, prepared and maintained by Contractor, describing the sequence and duration of the activities comprising the Contractor's plan to accomplish the Work within the Contract Times.
- (cc) Project—has the meaning ascribed to it in the Agreement and is as more specifically set forth throughout the Contract Documents. "Project" includes the total undertaking to be accomplished for PWC by engineers, contractors, and others, including planning, study, design, construction, testing, commissioning, and start-up, and of which the Work to be performed under the Contract Documents is a part.

- (dd) Project Engineer—the PWC employee assigned by PWC to coordinate, manage, monitor, and otherwise perform the administration necessary and consistent with PWC’s responsibilities for the Completion of the Project. The Project Engineer has authority to coordinate and work with the Design Engineer regarding any engineering questions, concerns, revisions, alterations, deletions, or additions to the Work, and has authority to approve any changes in the scope of the Work. Project Engineer may assign a “Project Coordinator” who will also be an employee of PWC and have the duties and responsibilities set by the Project Engineer.
- (ee) PWC—Fayetteville Public Works Commission. PWC may also be referred to in the Contract Documents as “Owner.”
- (ff) Samples—Physical examples of materials, equipment, or workmanship that are representative of some portion of the Work and that establish the standards by which such portion of the Work will be judged.
- (gg) Schedule of Submittals—A schedule, prepared and maintained by Contractor, of required submittals and the time requirements for Project Engineer’s review of the submittals and the performance of related construction activities.
- (hh) Schedule of Values—A schedule, prepared and maintained by Contractor, allocating portions of the Contract Price to various portions of the Work and used as the basis for reviewing Contractor’s Applications for Payment.
- (ii) Shop Drawings—All drawings, diagrams, illustrations, schedules, and other data or information that are specifically prepared or assembled by or for Contractor and submitted by Contractor to illustrate some portion of the Work. Shop Drawings, whether approved or not, are not Contract Drawings and are not Contract Documents.
- (jj) Site—Lands or areas indicated in the Contract Documents as being furnished by PWC upon which the Work is to be performed, including rights-of-way and easements, and such other lands furnished by PWC which are designated for the use of Contractor.
- (kk) Specifications—The part of the Contract that consists of written requirements for materials, equipment, systems, standards, and workmanship as applied to the Work, and certain administrative requirements and procedural matters applicable to the Work.
- (ll) Subcontractor—An individual or entity having a direct contract with Contractor or with any other Subcontractor for the performance of a part of the Work.
- (mm) Substantial Completion—The time at which the Work (or a specified part thereof) has progressed to the point where, in the opinion of Project Engineer, the Work (or a specified part thereof) is sufficiently complete, in accordance with the Contract Documents, so that the Work (or a specified part thereof) can be utilized for the purposes for which it is intended. The terms “substantially complete” and “substantially completed” as applied to all or part of the Work refer to Substantial Completion thereof.
- (nn) Successful Bidder—The Bidder whose Bid PWC accepts, and to which PWC provides a Notice of Award.
- (oo) Supplementary Conditions—Any part of the Agreement that amends or supplements these General Conditions.

- (pp) Supplier—A manufacturer, fabricator, supplier, distributor, materialman, or vendor having a direct contract with Contractor or with any Subcontractor to furnish materials or equipment to be incorporated in the Work by Contractor or a Subcontractor.
- (qq) Technical Data—Those items expressly identified as Technical Data in the Supplementary Conditions, with respect to either (a) subsurface conditions at the Site, or physical conditions relating to existing surface or subsurface structures at the Site (except Underground Facilities) or (b) Hazardous Environmental Conditions at the Site. If no such express identifications of Technical Data have been made with respect to conditions at the Site, then the data contained in boring logs, recorded measurements of subsurface water levels, laboratory test results, and other factual, objective information regarding conditions at the Site that are set forth in any geotechnical or environmental report prepared for the Project and made available to Contractor are hereby defined as Technical Data with respect to conditions at the Site under Paragraphs 5.03, 5.04, and 5.06.
- (rr) Underground Facilities—All underground pipelines, conduits, ducts, cables, wires, manholes, vaults, tanks, tunnels, or other such facilities or attachments, and any encasements containing such facilities, including but not limited to those that convey electricity, gases, steam, liquid petroleum products, telephone or other communications, fiber optic transmissions, cable television, water, wastewater, storm water, other liquids or chemicals, or traffic or other control systems.
- (ss) Unit Price Work—Work to be paid for on the basis of unit prices.
- (tt) Work—The entire construction or the various separately identifiable parts thereof required to be provided under the Contract Documents. Work includes and is the result of performing or providing all labor, services, materials, equipment, and documentation necessary to produce such construction; furnishing, installing, and incorporating all materials and equipment into such construction; and may include related services such as testing, start-up, and commissioning, all as required by the Contract Documents and necessary to achieve Completion of the Project.
- (uu) Work Change Directive—A written directive to Contractor issued on or after the Effective Date of the Contract, signed by PWC and recommended by the Project Engineer, ordering an addition, deletion, or revision in the Work.

Section 1.02 Terminology

The words and terms discussed in the following paragraphs are not defined but, when used in the Bidding Requirements or Contract Documents, have the indicated meaning.

- (a) Intent of Certain Terms or Adjectives:
 - (i) The Contract Documents include the terms “as allowed,” “as approved,” “as ordered,” “as directed” or terms of like effect or import to authorize an exercise of professional judgment by Project Engineer. In addition, the adjectives “reasonable,” “suitable,” “acceptable,” “proper,” “satisfactory,” or adjectives of like effect or import are used to describe an action or determination of Project Engineer as to the Work. It is intended that such exercise of professional judgment, action, or determination will be solely to evaluate, in general, the Work for compliance with the information in the Contract Documents and with the design concept of the Project as a functioning whole as shown or indicated in the

Contract Documents (unless there is a specific statement indicating otherwise). The use of any such term or adjective is not intended to and shall not be effective to assign to Project Engineer any duty or authority to supervise or direct the performance of the Work, or any duty or authority to undertake responsibility contrary to the provisions the Contract Documents.

- (b) Defective—when modifying the word “Work,” refers to Work that is unsatisfactory, faulty, or deficient in that it:
 - (i) does not conform to the Contract Documents; or
 - (ii) does not meet the requirements of any applicable inspection, reference standard, test, or approval referred to in the Contract Documents; or
 - (iii) has been damaged prior to Project Engineer’s recommendation of final payment (unless responsibility for the protection thereof has been assumed by PWC at Substantial Completion in accordance with the Contract Documents).
- (c) Furnish, Install, Perform, Provide
 - (i) The word “furnish,” when used in connection with services, materials, or equipment, shall mean to supply and deliver said services, materials, or equipment to the Site (or some other specified location) ready for use or installation and in usable or operable condition.
 - (ii) The word “install,” when used in connection with services, materials, or equipment, shall mean to put into use or place in final position said services, materials, or equipment complete and ready for intended use.
 - (iii) The words “perform” or “provide,” when used in connection with services, materials, or equipment, shall mean to furnish and install said services, materials, or equipment complete and ready for intended use.
 - (iv) If the Contract Documents establish an obligation of Contractor with respect to specific services, materials, or equipment, but do not expressly use any of the four words “furnish,” “install,” “perform,” or “provide,” then Contractor shall furnish and install said services, materials, or equipment complete and ready for intended use.

Unless stated otherwise in the Contract Documents, words or phrases that have a well-known technical or construction industry or trade meaning are used in the Contract Documents in accordance with such recognized meaning.

Article II. Preliminary Matters

Section 2.01 Delivery of Bonds and Evidence of Insurance

- (a) Bonds: Contractor shall deliver to PWC such bonds as Contractor is required to furnish simultaneously with delivering the executed Agreement to PWC.
- (b) Contractor’s Insurance: Contractor shall deliver to PWC the certificates and other evidence of the insurance required by the Contract Documents simultaneously with delivering the executed Agreement to PWC.

Section 2.02 Copies of Documents

- (a) PWC will furnish to Contractor up to five (5) printed copies of the Contract Documents upon request by Contractor, and one (1) copy in electronic portable document format

(PDF). Additional printed copies will be furnished upon request at the cost of reproduction.

- (b) PWC will maintain and safeguard at least one original printed record version of the Agreement, including Drawings and Specifications signed and sealed by Design Engineer or other design professionals as applicable. PWC agrees to make such original printed record version of the Agreement reasonably available to Contractor for review during PWC's normal business hours. PWC may delegate the responsibilities under this provision to Design Engineer.

Section 2.03 Before Starting any Work

- (a) Within ten (10) Days after the Contractor receives the Notice of Award from PWC (or as otherwise specifically required by the Contract Documents), Contractor shall submit to PWC for timely review:
 - (i) a preliminary Progress Schedule indicating the times (numbers of days or dates) for starting and completing the identifiable aspects of the Work, including any Milestones specified in the Contract Documents;
 - (ii) a preliminary Schedule of Submittals; and
 - (iii) Any Shop Drawings, Samples, and other submittals required by the Contract Documents before the Preconstruction Conference.

Section 2.04 Preconstruction Conference; Designation of Authorized Representatives

- (a) Before any Work at the Site is started, a preconstruction conference attended by PWC, Project Engineer, Contractor, Design Engineer, and others as appropriate will be held to establish a working understanding among the parties as to the Work and to discuss general Project issues including, but not limited, the following:
 - (i) The schedules and submittals referred to in Section 2.03;
 - (ii) Contractor's designated authorized representative as described in Section 2.04(b);
 - (iii) Safety;
 - (iv) Procedures for handling Shop Drawings, Samples, and other submittals;
 - (v) Processing Applications for Payment, electronic or digital transmittals;
- (b) At the preconstruction conference Contractor shall designate, in writing, a specific individual to act as its authorized representative with respect to its services and responsibilities under the Contract Documents. Such individual shall have the authority to transmit and receive information, render decisions relative to the requirements of the Contract Documents, and otherwise act on behalf of the Contractor.

Section 2.05 Initial Acceptance of Schedules

- (a) At least twenty (20) Days before submission of the first Application for Payment a conference, attended by Contractor, PWC, and others as appropriate, will be held to review for acceptability to Project Engineer as provided below the schedules submitted in accordance with Paragraph 2.03(a). PWC shall have ten (10) Days to review the submission and provide feedback to Contractor. Contractor shall then have ten (10) days to make any corrections and adjustments as indicated by PWC and to complete and resubmit the schedules as necessary. No progress payment shall be made to Contractor until acceptable schedules are submitted to and approved by Project Engineer.

- (b) The Progress Schedule will be acceptable to Project Engineer if it provides an orderly progression of the Work to achieve Completion of the Project within the Contract Times. Such acceptance will not impose on Project Engineer responsibility for the Progress Schedule, for sequencing, scheduling, or progress of the Work, nor interfere with or relieve Contractor from Contractor's full responsibility therefor.
- (c) Contractor's Schedule of Submittals will be acceptable to Project Engineer if it provides a workable arrangement for reviewing and processing the required submittals.

Section 2.06 Electronic Transmittals

- (a) Except as otherwise stated elsewhere in the Contract Documents, PWC and Contractor and their authorized agents may transmit, and shall accept, Project-related correspondence, text, data, documents, drawings, information, and graphics, including but not limited to Shop Drawings and other submittals, in electronic media or digital format, either directly, or through electronic mail at the address(es) designated by each Party.
- (b) When transmitting items in electronic media or digital format, the transmitting party makes no representations as to long term compatibility, usability, or readability of the items resulting from the recipient's use of software application packages, operating systems, or computer hardware differing from those used in the drafting or transmittal of the items, or from those established in applicable transmittal protocols.

Article III. Contract Documents: Intent, Requirements, Reuse

Section 3.01 Intent

- (a) The Contract Documents are complementary; what is required by one is as binding as if required by all.
- (b) It is the intent of the Contract Documents to describe a functionally complete project (or part thereof) to be constructed in accordance with the Contract Documents.
- (c) Project Engineer, Design Engineer, or both, will issue clarifications and interpretations of the Contract Documents as provided herein.
- (d) To the extent necessary that Work, construction, or conditions not covered by these General Conditions is required for Contractor to achieve Completion of the Project, "Special Conditions" for such Work will be provided to Contractor and shall be part of the Contract Documents.
- (e) In case of any inconsistency, conflict, or ambiguity among the Contract Documents, the documents shall govern in the following order: (1) Change Orders; (2) Addenda; (3) the fully executed Agreement; (4) Special Conditions; (5) any Drawings and Technical Specifications; and (6) General Conditions.

Section 3.02 Reference Standards

- (a) Standards Specifications, Codes, Laws and Regulations

- (i) Reference in the Contract Documents to standard specifications, manuals, reference standards, or codes of any technical society, organization, or association, or to Laws or Regulations, whether such reference be specific or by implication, shall mean the standard specification, manual, reference standard, code, or North Carolina laws and regulations in effect as of the Effective Date of the Agreement, except as may be otherwise specifically stated in the Contract Documents.
- (ii) No provision of any such standard specification, manual, reference standard, or code, or any instruction of a Supplier shall be effective to change the duties or responsibilities of PWC or Contractor, or any of their subcontractors, consultants, agents, or employees, from those set forth in the Contract Documents. No such provision or instruction shall be effective to assign to PWC or any of its officers, directors, members, partners, employees, agents, consultants, or subcontractors, any duty or authority to supervise or direct the performance of the Work or any duty or authority to undertake responsibility inconsistent with the provisions of the part of the Contract Documents.

Section 3.03 Reporting and Resolving Discrepancies

(a) Contractor's Verification of Figures and Measurements

- (i) Before undertaking any portion of the Work, Contractor shall review all of the Contract Documents to and check and verify all figures and dimensions for the Project. Contractor shall promptly report in writing to Project Engineer any conflict, error, ambiguity, or discrepancy that Contractor discovers, or has actual knowledge of, and shall not proceed with any Work affected thereby until the conflict, error, ambiguity, or discrepancy is resolved, by a clarification or interpretation by Project Engineer, or by an amendment or supplement to the Contract Documents issued pursuant to these General Conditions.
- (ii) If, before or during the performance of the Work, Contractor discovers any conflict, error, ambiguity, or discrepancy within the Contract Documents, or between the Contract Documents and (a) any applicable Law or Regulation, (b) actual field conditions, (c) any standard specification, manual, reference standard, or code, or (d) any instruction of any Supplier, then Contractor shall promptly report it to Project Engineer in writing. Contractor shall not proceed with the Work affected thereby (except in an emergency as defined hereinafter) until the conflict, error, ambiguity, or discrepancy is resolved, by a clarification or interpretation by Project Engineer, or by an amendment or supplement to the Contract Documents issued pursuant to these General Conditions.

(b) Resolving Discrepancies:

- (i) Except as may be otherwise specifically stated in the Contract Documents, the provisions of the part of the Contract Documents prepared by or for PWC shall take precedence in resolving any conflict, error, ambiguity, or discrepancy between such provisions of the Contract Documents and:
 - 1) the provisions of any standard specification, manual, reference standard, or code, or the instruction of any Supplier (whether or not specifically incorporated by reference as a Contract Document); or
 - 2) the provisions of any Laws or Regulations applicable to the performance of the Work (unless such an interpretation of the provisions of the Contract Documents would result in violation of such Law or Regulation).

Section 3.04 Reuse of Documents

- (a) Contractor and its Subcontractors and Suppliers shall not have or acquire any title to or ownership rights in any of the:
 - (i) Drawings, Specifications, or other documents (or copies of any thereof) prepared by or bearing the seal of Design Engineer or its consultants, including electronic media editions, or reuse any such Drawings, Specifications, other documents, or copies thereof on extensions of the Project or any other project without written consent of PWC and Design Engineer and specific written verification or adaptation by Design Engineer, where applicable; or
 - (ii) Contract Documents and shall not reuse any such Contract Documents for any purpose without PWC's express written consent.
- (b) The prohibitions of this provision shall survive final payment or termination of the Agreement. Nothing herein shall preclude Contractor from retaining copies of the Contract Documents for record purposes.

Article IV. Commencement and Progress of the Work

Section 4.01 Commencement of Work

- (a) The Contract Times will commence to run on the day indicated in the Notice to Proceed issued by PWC to Contractor. A Notice to Proceed may be given at any time after the Effective Date of the Contract.
- (b) Contractor shall start to perform the Work on the date when the Contract Times commence to run. No Work shall be done at the Site prior to such date. Contractor's failure to commence the Work within fifteen (15) Days of the date stated in the Notice to Proceed shall be deemed a material breach of the Agreement unless PWC otherwise determines in its sole discretion and agrees in writing to a delay of the Contract Times based on the applicable circumstances.

Section 4.02 Reference Points

- (a) Construction staking will be performed by Design Engineer, who will also prepare and furnish construction cut sheets, signed and sealed by a North Carolina professional land surveyor, to PWC and Contractor. Contractor shall not install any utilities without a sheet. All requests for staking shall be made not less than 96 hours in advance.
- (b) Contractor shall be responsible for laying out the Work, shall protect and preserve the established reference points and staking, and shall make no changes or relocations without the prior written approval of Project Engineer. Contractor shall report to Project Engineer whenever any reference point staking is lost or destroyed or requires relocation because of necessary changes in grades or locations, and shall be responsible for the accurate replacement or relocation of such reference points or staking by professionally qualified personnel.

Section 4.03 Progress Schedule

- (a) Contractor shall adhere to the Progress Schedule established in accordance with Section 2.03 as it may be adjusted from time-to-time as provided below. Contractor shall submit to Project Engineer for acceptance any proposed adjustments in the Progress Schedule that will not result in changing the Contract Times. Proposed adjustments in the Progress Schedule that will change the Contract Times shall be submitted in accordance with the requirements of Article IX.
- (b) Contractor shall carry on the Work and adhere to the Progress Schedule during any disputes or disagreements with PWC. No Work shall be delayed or postponed pending resolution of any disputes or disagreements, or during any appeal process, except as permitted by these General Conditions or as PWC and Contractor may otherwise agree in writing.

Section 4.04 Delays in Contractor's Progress

- (a) If PWC, Project Engineer, anyone for whom PWC is responsible, or a Force Majeure Event delays, disrupts, or interferes with the performance or progress of the Work, then Contractor shall be entitled to an equitable adjustment in the Contract Times and Contract Price. Contractor's entitlement to an adjustment of the Contract Times is conditioned on such adjustment being essential to Contractor's ability to complete the Work within the Contract Times.
- (b) Contractor shall not be entitled to an adjustment in Contract Price or Contract Times for delay, disruption, or interference caused by or within the control of Contractor. Delay, disruption, and interference attributable to and within the control of a Subcontractor or Supplier shall be deemed to be within the control of Contractor.
- (c) Contractor must submit any Change Proposal, consistent with the procedure set forth in Article IX, seeking an adjustment in Contract Price or Contract Times under this provision within ten (10) calendar days of the commencement of the event that causes the delay, disruption, or interference with the Work and Contract Times.

Article V. Availability of Lands; Subsurface and Physical Conditions; Hazardous Environmental Conditions

Section 5.01 Availability of Lands

- (a) PWC will be responsible for obtaining any required easements and encroachments, and otherwise furnishing the Site, necessary to complete the Work, except as provided elsewhere in the Contract Documents.
- (b) Upon reasonable written request, PWC shall furnish to Contractor a current statement of record legal title and legal description of the lands upon which the Work is to be completed and PWC's interest therein.
- (c) Contractor shall provide for all additional lands and access thereto that may be required for temporary construction facilities or storage of materials and equipment necessary to complete the Work. Any and all agreements between the Contractor and any individual property owner(s) shall not obligate PWC, PWC's employees, Project Engineer, or Design

Engineer in any manner, and Contractor shall, before performing any work on any such property, obtain a signed and notarized release of liability of PWC and Design Engineer that is suitable to PWC as confirmed in writing.

- (d) Contractor and any of its Subcontractors shall exercise care and caution to avoid damage to any private property. Should any such damage to private property occur, it is Contractor's responsibility to notify the Project Engineer promptly in writing that such damage occurred, the extent of the damage, and Contractor's written plan to remedy the damage. If Contractor fails to timely correct damage to private property, PWC reserves the right to withhold progress payments until damage is corrected and/or to correct damage and back-charge Contractor for costs incurred. At the Completion of the Project, Contractor shall obtain a signed release from all owners of private property to which damage occurred that releases PWC and Design Engineer and acknowledges a settlement for the damage or that such damage was adequately remedied.

Section 5.02 Use of Site and Other Areas

- (a) Contractor shall confine construction equipment, temporary construction facilities, the storage of materials and equipment, and the operations of workers to the Site and other adjacent areas permitted by Laws and Regulations and shall not unreasonably encumber the Site and such other adjacent areas with construction equipment or other materials or equipment. Contractor shall assume full responsibility for (a) damage to the Site; (b) damage to any such other adjacent areas used for Contractor's operations; (c) damage to any other adjacent land or areas; and (d) for injuries and losses sustained by the owners or occupants of any such land or areas; provided that such damage or injuries result from the performance of the Work or from other actions or conduct of the Contractor or those for which Contractor is responsible.
- (b) Contractor shall keep the Site and other adjacent areas free from accumulations of waste materials, rubbish, and other debris during the progress of the Work. Removal and disposal of such debris shall conform to applicable Laws and Regulations.
- (c) Prior to Completion of the Project, Contractor shall clean the Site and the Work and make it ready for utilization by PWC. At the completion of all of the Work, Contractor shall remove from the Site and adjacent areas all tools, appliances, construction equipment and machinery, and surplus materials and shall restore to original condition all property not designated for alteration by the Contract Documents.
- (d) Contractor shall not load nor permit any part of any structure to be loaded in any manner that will endanger the structure, nor shall Contractor subject any part of the Work or adjacent structures or land to stresses or pressures that will endanger them.

Section 5.03 Differing Subsurface or Physical Conditions or Underground Facilities

- (a) If Contractor believes that any subsurface or physical condition or Underground Facilities that is uncovered or revealed at the Site either:
 - (i) is of such a nature as to establish that any Technical Data on which Contractor is entitled to rely is materially inaccurate;
 - (ii) is of such a nature as to require a change in the Contract Documents;
 - (iii) differs materially from that shown or indicated in the Contract Documents; or

- (iv) is of an unusual nature, and differs materially from conditions ordinarily encountered and generally recognized as inherent in work of the character provided for in the Contract Documents;

then Contractor shall, promptly after becoming aware thereof and before further disturbing the subsurface or physical conditions or Underground Facilities or performing any Work in connection therewith, notify PWC and Engineer in writing about such condition. Contractor shall not further disturb such condition or perform any Work in connection therewith (except with respect to an emergency) until receipt of a written statement approved by PWC permitting Contractor to do so.

- (b) After receipt of Contractor's written notice, Project Engineer will review the subsurface or physical condition or Underground Facilities in question; determine the necessity of PWC obtaining additional exploration or tests with respect to the condition; conclude whether the condition falls within any of the differing site condition categories in this Section 5.03; and obtain any pertinent cost or schedule information from Contractor.
- (c) Project Engineer will issue a written statement to Contractor regarding the subsurface or physical condition or Underground Facilities in question, which addresses the resumption of Work in connection with such condition and indicates whether any change in the Contract Documents will be made.

(d) Possible Price and Times Adjustments:

- (i) Contractor shall be entitled to an equitable adjustment in Contract Price or Contract Times, or both, to the extent that the existence of a differing subsurface or physical condition or Underground Facilities, or any related delay, disruption, or interference, causes an increase or decrease in Contractor's cost of, or time required for, performance of the Work; subject, however, to the following:

- 1) such condition must fall within at least one of the categories in this Section 5.03; and,
- 2) Contractor's entitlement to an adjustment of the Contract Times is conditioned on such adjustment being essential to Contractor's ability to complete the Work within the Contract Times.

- (ii) Contractor shall not be entitled to any adjustment in the Contract Price or Contract Times with respect to a subsurface or physical condition or Underground Facilities if:

- 1) Contractor knew of the existence of such condition at the time Contractor proffered its Bid to PWC or executed the applicable Agreement for the Project; or
- 2) the existence of such condition reasonably could have been discovered or revealed as a result of any examination, investigation, exploration, test, or study of the Site and contiguous areas expressly required by the Bidding Requirements or Contract Documents to be conducted by or for Contractor prior to Contractor's Bid; or
- 3) Contractor failed to give the written notice as required.

- (iii) If PWC and Contractor agree regarding Contractor's entitlement to, and the amount or extent of, any adjustment in the Contract Price or Contract Times, or both, then any such adjustment shall be set forth in a Change Order.

- (iv) Contractor may submit a Change Proposal regarding its entitlement to or the amount or extent of any adjustment in the Contract Price or Contract Times, or both, no later than 30 calendar days after Project Engineer's written statement to Contractor regarding the

subsurface or physical condition or Underground Facilities in question.

Section 5.04 Underground Utilities

- (a) Contractor shall ascertain the location and type of all underground utility lines or structures that may be located within the limits of the Site or any area where Work is to be performed.
 - (i) The exact location of underground utilities or structures may vary from prior plans, permits, maps, or other documentation, and others may not be designated. The Contractor is fully responsible for verification of the exact location of all underground utility lines or structures within the limits of the Site or the area where the work is to be performed, whether known or unknown by PWC, and for providing necessary protection and/or repair if damage.
 - (ii) Should uncharted or incorrectly charted piping or other utilities be encountered during excavations, the Contractor shall immediately halt any Work, notify PWC, and await direction from PWC before proceeding with any Work. The Contractor shall fully cooperate with PWC and any other utility company in keeping respective services and facilities in operation.
- (b) PWC has used reasonable care to locate and depict existing underground installation on the construction drawings, but the accuracy cannot be guaranteed, and some items may not be shown which exist. Actual horizontal and vertical locations have not been verified. As part of the Work, the Contractor is required to dig up each utility which may conflict with construction in advance to verify locations. The utilities shall be "dug up" a minimum of fourteen (14) Days in advance of actual installation of new utilities to allow PWC an opportunity to adjust grades and alignments, to avoid a conflict, and to address any other issues.
- (c) The Contractor shall adhere to the provisions of the North Carolina Underground Utility Safety and Damage Prevention Act. The Contractor shall make a documented request to the North Carolina One Call Center, and/or individual utility owners, in order to locate any facilities within the Site limits or any area where Work is to be performed at least forty-eight (48) hours in advance of the day the Work is scheduled to begin. The Contractor shall include the cost of any coordination and cooperation for utilities in its Bid.
 - (i) Location assistance requested from PWC by Contractor should include the actual horizontal location, type number, size, and depth of all lines. All costs associated with locating and marking existing utilities or the utilities representatives shall be the responsibility of the Contractor.
 - (ii) The Owner, Project Engineer, Design Engineer, and/or Consultants shall not be liable to the Contractor for any claims, costs, losses, or damages incurred or sustained on or in connection with locating existing underground installations.
- (d) If the Contractor fails to schedule locates or perform advance physical locations in advance of the construction and a conflict arises, the Contractor will be required to make corrective measures as instructed by the Project Engineer at the Contractor's expense. The Contractor's failure to advance plan (minimum fourteen (14) days) by physically

uncovering existing utilities in advance of construction shall not be cause for claim of lost time or for additional compensation. No additional payment will be made for re-mobilization required by the utility locator.

- (i) The Contractor shall inform all equipment operators, either those employed by him or those employed by his subcontractors, of information obtained from the utility owners prior to initiation of any aspect of any Work.
- (e) PWC and Design Engineer shall not be responsible for the accuracy or completeness of any information or data provided to the Contractor with respect to underground facilities.
- (f) The entire cost of all of the following will be included in the Contract Price, and Contractor shall bear full responsibilities for all such costs, including but not limited to:
 - (i) Reviewing and checking all such information and data;
 - (ii) Locating all underground facilities shown or indicated in the Contract Documents;
 - (iii) Coordination of the Work with the owners of such underground facilities, including PWC, during any portion of the Work; and
 - (iv) The safety and protection of all such underground facilities and repairing any damage thereto resulting from the Work.
- (g) Contractor shall be responsible for the discovery of existing underground installations, in advance of any excavating or trenching as required in the Contract Documents.
- (h) If an underground facility is discovered at or contiguous to the Site that was not shown or indicated in the Contract Documents or of which Contractor was not aware prior to starting that portion of any Work, Contractor shall, immediately after becoming aware thereof and before further disturbing conditions affected thereby or performing any Work in connection therewith (except in an emergency), identify the owner of such underground facility and give written notice to PWC. Upon receipt of written notice, PWC will review the pertinent condition, determine the necessity of obtaining additional information, and advise Contractor in writing. During such time, Contractor shall be responsible for the safety and protection of such underground facility. If PWC concludes that a change in the Contract Documents is required, a Change Order will be issued.
- (i) The Contract Price and/or the Contract Time, may be adjusted if PWC determines, in its discretion, that the existence of such differing subsurface or physical condition causes an increase or decrease in Contractor's cost of, or time required for, performance of the Work subject to the following:
 - 1) Facility was not shown or indicated in the Contract Documents, and
 - 2) The Contractor did not know of or could not anticipate the facility.

Section 5.05 Hazardous Environmental Conditions at Site

- (a) Contractor shall not be responsible for removing or remediating any Hazardous Environmental Condition encountered, uncovered, or revealed at the Site unless such removal or remediation is expressly identified in the Contract Documents to be within the scope of the Work or Hazardous Environmental Condition was caused by Contractor.
- (b) Contractor shall be responsible for controlling, containing, and removing all Constituents of Concern brought to the Site by Contractor, Subcontractors, Suppliers, or anyone else for whom Contractor is responsible, and for any associated costs; and for the costs of removing and remediating any Hazardous Environmental Condition created by the presence of any such Constituents of Concern.
- (c) If Contractor encounters, uncovers, or reveals a Hazardous Environmental Condition whose removal or remediation is not expressly identified in the Contract Documents as being within the scope of the Work, or if Contractor or anyone for whom Contractor is responsible creates a Hazardous Environmental Condition, then Contractor shall immediately: (1) secure or otherwise isolate such condition; (2) stop all Work in connection with such condition and in any area affected thereby (except in an emergency); and (3) immediately notify Project Engineer (and promptly thereafter confirm such notice in writing). Project Engineer will evaluate such condition or take corrective action, if any. If Contractor or anyone for whom Contractor is responsible created the Hazardous Environmental Condition in question, then PWC may have the Hazardous Environmental Condition removed and remediated and impose a set-off against payments to Contractor to account for the reasonable associated costs.
- (d) Contractor shall not resume Work in connection with such Hazardous Environmental Condition or in any affected area until after PWC has delivered written notice to Contractor either (1) specifying that such condition and any affected area is or has been rendered safe for the resumption of Work, or (2) specifying any special conditions under which such Work may be resumed safely.
- (e) If PWC and Contractor cannot agree as to entitlement to or on the amount or extent, if any, of any adjustment in Contract Price or Contract Times, or both, as a result of such Work stoppage or such special conditions under which Work is agreed to be resumed by Contractor, then within thirty (30) calendar days of PWC's written notice regarding the resumption of Work, Contractor may submit a Change Proposal or PWC may impose a set-off.
- (f) If after receipt of such written notice Contractor does not agree to resume such Work based on reasonable evidence it is unsafe or does not agree to resume such Work under such special conditions, then PWC may order the portion of the Work that is in the area affected by such condition to be deleted from the Work.

Article VI. Bonds and Insurance

Section 6.01 Performance and Payment Bonds

- (a) Contractor shall obtain and furnish to PWC a performance bond in the amount of one hundred percent (100%) of the Contract Price, conditioned upon the faithful performance of the Project and all Work in accordance with the Contract Documents, which bond shall be

solely for the protection of PWC.

- (b) Contractor shall obtain and furnish to PWC a payment bond in the amount of one hundred percent (100%) of the Contract Price, conditioned upon the prompt payment for all labor or materials for which the Contractor or one or more of its subcontractors is liable, which payment bond shall be solely for the protection of the persons furnishing materials or performing labor for which the Contractor is liable.
- (c) The performance bond and the payment bond shall be executed by one or more surety companies legally authorized to do business in the State of North Carolina, shall become effective upon the awarding of the construction contract by PWC to Contractor, and shall at all times comply with the requirements set forth in Article 3 of North Carolina General Statutes Chapter 44A.
- (d) In the event PWC deems the surety or sureties upon any bond necessary for the Agreement and the completion of the Project, or if for any reason, such bond ceases to be adequate to cover the performance and/or payment of the Work, Contractor shall, at its expense, and within ten (10) days after the receipt of notice from PWC, furnish such additional bond(s) in such form and amount, and with such surety or sureties, as shall be satisfactory to PWC. In such event no further payment to Contractor shall be deemed to be due under this Agreement until new or additional security for the performance and payment of the Project shall be furnished in manner and form satisfactory to PWC.
- (e) By executing the Agreement, Contractor understands and acknowledges that PWC, as a public authority, and the City, as a municipal corporation, are not subject to the provisions of Articles 1 and 2 of Chapter 44A of the General Statutes, in accordance with G.S. 44A-34 and applicable law.

Section 6.02 Insurance

- (a) Contractor shall maintain during the life of the Agreement and during the completion of any Work the following insurance coverages, which insurance shall be placed with insurance companies authorized to do business in the State of North Carolina and rate A minus VII or better by the current edition of Best's Key Rating Guide or otherwise approved in writing by PWC:
 - (i) Commercial general liability insurance with limits of \$1,000,000 per occurrence, \$2,000,000 aggregate other than products/completed operations; \$2,000,000 aggregate for products/completed. Commercial general liability coverage shall be written on an "occurrence" basis.
 - (ii) Automobile liability insurance in an amount not less than \$1,000,000 combined single limit per accident for bodily injury and property damage from owned, non-owned, and hired automobiles.
 - (iii) Workers' compensation insurance as required by the Laws and Regulations. In the event any employee(s), contractor(s), or subcontractor(s) engaged to perform any Work under the Agreement is not protected under the applicable workers' compensation laws, the Contractor shall provide adequate coverage for the protection of such employee(s), contractor(s), or subcontractor(s) not otherwise protected.

- (iv) In the event the Project concerns building construction or repair work, Contractor shall purchase and maintain "Builder's Risk" insurance. This insurance shall include the interests of the PWC, Contractor, and any Subcontractor(s) and shall be written on a one hundred percent (100%) completed value basis (full value as of the date that all construction is finished and includes the Contractor's Contract Price), and to remain in force until Completion of the Project.
- (v) Regardless of the nature of the work to be performed, coverage must also be provided for the theft or damage of building materials and supplies, which are not permanently attached or stored on Site for any period of time. This coverage shall be an "Installation Floater." If no building construction or repair is involved for the Project, the amount of the coverage shall equal the value of the materials stored on site.
- (b) Prior to initiating any Work on the Project, Contractor shall deliver certificates of insurance confirming each such coverage set forth above, and Contractor shall direct its insurers to provide annually to PWC certificates confirming each such coverage during the coverage period.
- (c) PWC shall be named as an additional insured in the comprehensive automobile and commercial liability insurance policies.
- (d) Contractor shall not reduce or allow the required insurance coverages to lapse without PWC's prior written approval. All policies for insurance must be endorsed to contain a provision giving PWC a thirty (30) calendar day prior written notice by certified mail of any cancellation of that policy or material reduction in coverage. Should a notice of cancellation be issued for non-payment of premiums or any part thereof, or should Contractor fail to provide and maintain certificates as set forth herein, PWC shall have the right, but shall not have the obligation, to pay such premium to the insurance company or to obtain such coverage and to deduct such payment from any sums that may be due or become due to Contractor, or to seek reimbursement for said payments from Contractor. Any such sums paid by PWC shall be due and payable immediately by Contractor upon notice from PWC.
- (e) The insurance coverage requirements shall not be construed as a limitation on Contractor's responsibilities and liabilities pursuant to the terms and conditions of this Agreement. Contractor's obligation to maintain insurance for three (3) years after Completion of the Project shall survive the termination of this Agreement.
- (f) If Contractor fails to obtain and maintain any required insurance, PWC may exclude Contractor from the Site, impose an appropriate set-off against payment, and exercise PWC's termination rights pursuant to the Contract Documents.
- (g) PWC does not represent that insurance coverage and limits established in this Contract necessarily will be adequate to protect Contractor or Contractor's interests.

Article VII. Contractor's Responsibilities

Section 7.01 Supervision and Superintendence

- (a) Contractor shall supervise, inspect, and direct the Work competently and efficiently, devoting such attention and applying such skills and expertise as may be necessary to

perform the Work in accordance with the Contract Documents. Contractor shall be solely responsible for the means, methods, techniques, sequences, and procedures of construction subject to the terms, provisions, and specifications set forth in the Contract Documents.

- (b) At all times during the progress of the Work, Contractor shall assign a competent superintendent, satisfactory to Project Engineer, to supervise the Work and to respond to Project Engineer concerning PWC's interests in the Work.
- (c) Contractor's superintendent shall have full authority to act on behalf of Contractor and all communications, instructions, directions, and notices given to the superintendent by the Project Engineer shall be binding to the Contractor.
- (d) Contractor's superintendent shall be responsible for coordination of the Work with other contractors or subcontractors. The superintendent shall not be replaced without written notice to PWC except under extraordinary circumstances.
- (e) Subcontractors
 - (i) Contractor shall submit the names and references all Subcontractors to the Project Engineer for approval before commencing any Work.
 - 1) In the event Contractor seeks to substitute any Subcontractor that was identified in Contractor's Bid, Contractor shall promptly provide PWC with: (1) the Subcontractor it seeks to substitute; (2) the identity of the Subcontractor to be substituted; and (3) the reason for the requested substitution.
 - 2) PWC will review the requested substitution within five (5) Business Days and provide written approval or denial of the substitution, with such approval not to be unreasonably withheld.
 - (ii) Contractor's superintendent shall be available to be present at the Site at any time that any Subcontractor(s) is performing any of the Work. Construction activity shall be stopped if the Contractor's superintendent is not available to be at the Site.

Section 7.02 Labor; Working Hours

- (a) Contractor shall provide competent, suitably qualified personnel to survey and lay out the Work and perform construction as required by the Contract Documents. Contractor shall at all times maintain good discipline and order at the Site. Contractor shall remove from the Project any person who appears incompetent, disorderly, or otherwise unsatisfactory. Contractor shall also remove any person who appears in PWC's sole discretion to be incompetent, disorderly, or otherwise unsatisfactory
- (b) Except as otherwise required for the safety or protection of persons or the Work or property at the Site or adjacent thereto, and except as otherwise stated in the Contract Documents, all Work at the Site shall be performed on Business Days. Contractor will not perform Work on non-Business Days. Contractor may perform Work outside regular working hours or on Saturdays, Sundays, or legal holidays only with PWC's written consent, which will not be unreasonably withheld. In such circumstances, Contractor shall submit a written request to PWC at least two (2) Business Days prior to any Work that it requests to complete on a

non-Business Day and PWC will, in its sole discretion, approve or deny such request. If such work outside of a Business Day is approved, PWC will set forth the specific parameters that Contractor must follow, including time of work, personnel, and any other issues.⁸

Section 7.03 Services, Materials, and Equipment

- (a) Unless otherwise specified in the Contract Documents, Contractor shall provide and assume full responsibility for all services, materials, equipment, labor, transportation, construction equipment and machinery, tools, appliances, fuel, power, light, heat, telephone, water, sanitary facilities, temporary facilities, and all other facilities and incidentals necessary for the performance, testing, start up, and Completion of the Project, whether or not such items are specifically called for in the Contract Documents.
- (b) All materials and equipment incorporated into the Work shall be of good quality and new, except as otherwise specified in the Contract Documents. All special warranties and guarantees required by the Specifications shall expressly run to the benefit of PWC. If required by PWC or its designee, Contractor shall furnish satisfactory evidence (including reports of required tests) as to the source, kind, and quality of materials and equipment.
- (c) All materials and equipment shall be stored, applied, installed, connected, erected, protected, used, cleaned, and conditioned in accordance with instructions of the applicable Supplier, except as otherwise may be specified in the Contract Documents.

Section 7.04 "Or Equals"

- (a) Whenever an item of material or equipment is specified or described in the Contract Documents by using the name of a proprietary item or the name of a particular Supplier, the specification or description of such an item is intended to establish the type, function, appearance, and quality required. Unless the specification or description contains or is followed by words reading that no like, equivalent, or "or equal" item is permitted, Contractor may request that Project Engineer authorize the use of other items of material or equipment under the circumstances described below.
 - (i) If Project Engineer determines that an item of material or equipment proposed by Contractor is functionally equal to that named and sufficiently similar so that no change in related Work will be required, Project Engineer shall deem it an "or equal" item and confirm such in writing to Contractor. A proposed item of material or equipment will be considered functionally equal to an item so named if:
 - 1) in the exercise of reasonable judgment Project Engineer determines that:
 - a) it is at least equal in materials of construction, quality, durability, appearance, strength, and design characteristics;
 - b) it will reliably perform at least equally well the function and achieve the results imposed by the design concept of the completed Project as a functioning whole;
 - c) it has a proven record of performance and availability of responsive service; and
 - d) it is not objectionable to PWC.
 - 2) Contractor certifies that, if approved and incorporated into the Work:
 - a) there will be no increase in the Contract Price or Contract Times; and

- b) it will conform substantially to the detailed requirements of the item specified in the Contract Documents.
- (b) Contractor shall provide all data in support of any proposed “or equal” item at Contractor’s expense.
- (c) Project Engineer will be allowed a reasonable time to evaluate each “or-equal” request. Project Engineer may require Contractor to furnish additional data about the proposed “or-equal” item. Project Engineer will be the sole judge of acceptability. Contractor shall not order, furnish, install, or utilize any “or-equal” it until Project Engineer has reviewed the request, determined that the proposed item is an “or-equal,” and provided written confirmation to Contractor.
- (d) Project Engineer’s denial of an “or-equal” request shall be final and binding and may not be reversed through an appeal under any provision of the Contract Documents.

Section 7.05 Concerning Subcontractors, Suppliers, and Others

- (a) Contractor may retain Subcontractors and Suppliers for the performance of parts of the Work. Such Subcontractors and Suppliers must be acceptable to PWC.
- (b) Contractor shall not subcontract more than forty-nine percent (49%) of the final Contract Price.
- (c) Contractor shall retain specific Subcontractors, Suppliers, or other individuals or entities for the performance of designated parts of the Work if required by the Contract Documents.
- (d) After the submittal of Contractor’s Bid or final negotiation of the terms of the Agreement, PWC may not require Contractor to retain any Subcontractor, Supplier, or other individual or entity to furnish or perform any of the Work.
- (e) Prior to entry into any binding subcontract or purchase order, Contractor shall submit to PWC the identity of the proposed Subcontractor or Supplier (unless PWC has already deemed such proposed Subcontractor or Supplier acceptable, during the bidding process or otherwise). Such proposed Subcontractor or Supplier shall be deemed acceptable to PWC unless PWC raises a substantive, reasonable objection within five (5) Business Days.
- (f) No acceptance by PWC of any such Subcontractor, Supplier, or other individual or entity, whether initially or as a replacement, shall constitute a waiver of the right of PWC to the completion of the Work in accordance with the Contract Documents.
- (g) Contractor shall be fully responsible to PWC for all acts and omissions of the Subcontractors, Suppliers, and other individuals or entities performing or furnishing any of the Work just as Contractor is responsible for Contractor’s own acts and omissions.
- (h) Contractor shall be solely responsible for scheduling and coordinating the Subcontractors, Suppliers, and all other individuals or entities performing or furnishing any of the Work.
- (i) Contractor shall restrict all Subcontractors, Suppliers, and such other individuals or entities performing or furnishing any of the Work from communicating with PWC, except through Contractor or in case of an emergency, or as otherwise expressly allowed herein.

- (j) All Work performed for Contractor by a Subcontractor or Supplier shall be pursuant to an appropriate contractual agreement that specifically binds the Subcontractor or Supplier to the applicable terms and conditions of the Contract Documents for the benefit of PWC.
- (k) PWC may furnish to any Subcontractor or Supplier, to the extent practicable, information about amounts paid to Contractor on account of Work performed for Contractor by the particular Subcontractor or Supplier.
- (l) Nothing in the Contract Documents:
 - (i) shall create for the benefit of any such Subcontractor, Supplier, or other individual or entity any contractual relationship between PWC or Design Engineer and any such Subcontractor, Supplier, or other individual or entity; nor
 - (ii) shall create any obligation on the part of PWC or Design Engineer to pay or to see to the payment of any money due any such Subcontractor, Supplier, or other individual or entity except as may otherwise be required by Laws and Regulations.

Section 7.06 Patent Fees and Royalties

- (a) Contractor shall pay all license fees and royalties and assume all costs incident to the use in the performance of the Work or the incorporation in the Work of any invention, design, process, product, or device that is the subject of patent rights or copyrights held by others. If a particular invention, design, process, product, or device is specified in the Contract Documents for use in the performance of the Work and if, to the actual knowledge of PWC, its use is subject to patent rights or copyrights calling for the payment of any license fee or royalty to others, the existence of such rights shall be disclosed by PWC in the Contract Documents.

Section 7.07 Permits

- (a) Unless otherwise specified in the Contract Documents, Contractor shall obtain and pay for all construction permits and licenses necessary to achieve Completion of the Project. Contractor shall timely seek assistance from PWC if necessary to obtain any permits or licenses; provided that, the Contract Time shall not be extended if PWC determines, in its discretion, that Contractor delayed or otherwise did not act expeditiously in requesting such assistance. PWC shall assist Contractor, when necessary, in obtaining such permits and licenses. Contractor shall pay all governmental charges and inspection fees necessary for Completion of the Project that are applicable at the time of the submission of Contractor's Bid.

Section 7.08 Taxes

- (a) Contractor shall pay all sales, consumer, use, and other similar taxes required to be paid by Contractor in accordance with the applicable Laws and Regulations for the Project and which are applicable during the performance of the Work.

Section 7.09 Laws and Regulations

- (a) Contractor shall give all notices required by, and shall comply with, all Laws and Regulations applicable to the Project. Except as otherwise expressly required, PWC shall

not be responsible for monitoring Contractor's compliance with any Laws or Regulations.

- (b) Contractor shall bear all resulting costs and losses for any of its actions or inactions that are contrary to Laws or Regulations.
- (c) PWC or Contractor may give notice to the other party of any changes after the submission of Contractor's Bid (or after the date when Contractor became bound under the Agreement) concerning any Laws or Regulations having an effect on the Contract Price or Contract Times, including but not limited to changes in Laws or Regulations having an effect on procuring permits and on sales, use, value-added, consumption, and other similar taxes. If PWC and Contractor are unable to agree on entitlement to or on the amount or extent, if any, of any adjustment in Contract Price or Contract Times resulting from such changes, then within 30 calendar days of such notice Contractor may submit a Change Proposal.

Section 7.10 Record Documents

- (a) Contractor shall maintain in good order one (1) printed record copy of all Drawings, Specifications, Addenda, Change Orders, Work Change Directives, Field Orders, written interpretations and clarifications, and approved Shop Drawings. These record documents, together with all approved Samples, will be available to Project Engineer for reference. Upon completion of the Work, Contractor shall deliver these record documents to PWC.

Section 7.11 Safety and Protection

- (a) Contractor shall be solely responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the Work. Such responsibility does not relieve Subcontractors of their responsibility for the safety of persons or property in the performance of their work, nor for compliance with applicable safety Laws and Regulations. Contractor shall take all necessary precautions for the safety of, and shall provide the necessary protection to prevent damage, injury, or loss to:
 - (i) all persons on the Site or who may be affected by the Work;
 - (ii) all the Work and materials and equipment to be incorporated therein, whether in storage on or off the Site; and
 - (iii) other property at the Site or adjacent thereto, including trees, shrubs, lawns, walks, pavements, roadways, structures, other work in progress, utilities, and Underground Facilities not designated for removal, relocation, or replacement in the course of construction.
- (b) Contractor shall comply with all applicable Laws and Regulations relating to the safety of persons or property, or to the protection of persons or property from damage, injury, or loss, and shall erect and maintain all necessary safeguards for such safety and protection. Contractor shall notify PWC, the owners of adjacent property or Underground Facilities, and other contractors and owners performing work at or adjacent to the Site, when prosecution of the Work may affect them, and shall cooperate with them in the protection, removal, relocation, and replacement of their property or work in progress.
- (c) Contractor shall comply with the requirement of any of PWC's applicable health programs, which may be revised from time to time based on specific circumstances or applicable guidance from the Center for Disease Control or other applicable entity. Such health programs will be identified in the Special Conditions if applicable to the Project.

- (d) Contractor shall comply with the requirements of PWC's applicable safety programs. The Special Conditions identify any of PWC's safety programs that are applicable to the Project.
- (e) Contractor shall remedy, at its expense, all damage, injury, or loss to any property caused, directly or indirectly, in whole or in part, by Contractor, any Subcontractor, Supplier, or any other individual or entity directly or indirectly employed by any of them to perform any of the Work, or anyone for whose acts any of them may be liable.
- (f) Contractor's duties and responsibilities for safety and protection shall continue until such time as Completion of the Project is achieved.
- (g) Contractor's duties and responsibilities for safety and protection shall resume whenever Contractor or any Subcontractor or Supplier returns to the Site to fulfill warranty or correction obligations, or to conduct other tasks arising from the Contract Documents.
- (h) Contractor shall designate in writing to PWC a qualified and experienced safety representative at the Site whose duties and responsibilities shall be the prevention of accidents and the maintaining and supervising of safety precautions and programs.

Section 7.12 Emergencies

- (a) In emergencies affecting the safety or protection of persons or the Work or property at the Site or adjacent thereto, Contractor is obligated to, and shall, act to prevent threatened damage, injury, or loss. Contractor shall give PWC prompt written notice if Contractor believes that any significant changes in the Work or variations from the Contract Documents have been caused or are required as a result of any emergency. If PWC determines that a change in the Contract Documents is required because of the action taken by Contractor in response to such an emergency, a Work Change Directive or Change Order will be issued.

Section 7.13 Shop Drawings, Samples, and Other Submittals

- (a) Contractor shall timely submit Shop Drawings and Samples required by the Contract Documents to Project Engineer for review and approval in accordance with applicable specifications.
- (b) Before submitting a Shop Drawing or Sample, Contractor shall have
 - (i) reviewed the Shop Drawing or Sample with other Shop Drawings and Samples and with the requirements of the Work and the Contract Documents;
 - (ii) verified all measurements, quantities, dimensions, performance and design criteria, installation requirements, materials, catalog numbers, and similar information;
 - (iii) verified the suitability of all materials and equipment offered with respect to the indicated application, fabrication, shipping, handling, storage, assembly, and installation pertaining to the performance of the Work; and
 - (iv) verified all information relative to Contractor's responsibilities for means, methods, techniques, sequences, and procedures of construction, and safety precautions and programs incident thereto.
- (c) With each submittal, Contractor shall give Project Engineer specific written notice of any

variations that the Shop Drawing or Sample may have from the requirements of the Contract Documents. This notice shall be a written communication separate from the Shop Drawings or Sample submittal; and, in addition, in the case of Shop Drawings by a specific notation made on each Shop Drawing submitted to PWC for review and approval of each such variation.

- (d) Where a Shop Drawing or Sample is required by the Contract Documents, any related Work performed prior to Project Engineer's review and approval of the pertinent submittal will be at the sole expense and responsibility of Contractor.
- (e) Project Engineer will provide timely review of any required Shop Drawings and Samples. Such review, and subsequent determination of approval, will be only to determine if the items covered by the submittals will, after installation or incorporation in the Work, conform to the information given in the Contract Documents and be compatible with the design concept of the completed Project as a functioning whole as indicated by the Contract Documents.
- (f) Project Engineer's review and approval will not extend to means, methods, techniques, sequences, or procedures of construction or to safety precautions or programs incident thereto.
- (g) Project Engineer's review and approval of a Shop Drawing or Sample, or of a variation from the requirements of the Contract Documents, shall not change the Contract Times or Contract Price, unless such changes are included in a Change Order.
- (h) Project Engineer's receipt, review, acceptance or approval of a Shop Drawing, Sample, or other submittal shall not result in such item becoming a Contract Document.
- (i) Contractor shall perform the Work in compliance with the requirements and commitments set forth in approved Shop Drawings and Samples.
- (j) Resubmittal Procedures:
 - (i) Contractor shall make corrections required by Project Engineer and shall return the required number of corrected copies of Shop Drawings and submit new Samples as required for review and approval. Contractor shall direct specific attention in writing to revisions other than the corrections called for by PWC or Project Engineer on previous submittals.
 - (ii) Contractor shall furnish required submittals with sufficient information and accuracy to obtain required approval of an item with no more than three (3) submittals. If PWC has engaged a Design Engineer for the Project, Design Engineer will record Design Engineer's time for reviewing a fourth or subsequent submittal of a Shop Drawings, sample, or other item requiring approval, and Contractor shall be responsible for Design Engineer's charges to PWC for such time. PWC may impose a set-off against payments due to Contractor to secure reimbursement for such charges.
 - (iii) If Contractor requests a change of a previously approved submittal item, Contractor shall be responsible for Design Engineer's charges to PWC for its review time, and PWC may impose a set-off against payments due to Contractor to secure reimbursement for such charges, unless the need for such change is beyond the control of Contractor.

Section 7.14 Contractor's General Warranty and Guarantee

- (a) In order to induce PWC to enter into an Agreement with Contractor for the Project, Contractor warrants and guarantees to PWC that:
- (i) Contractor is duly licensed in the State of North Carolina to complete all Work necessary for the Project, is duly organized, validly existing and in good standing and has all requisite powers, rights, and authority to execute, enter into, and perform the Agreement in accordance with the terms and conditions of the Agreement, and the Agreement constitutes a legal, valid, and binding obligation of Contractor enforceable against it in accordance with its terms.
 - (ii) Contractor has read the Contract Documents, and acknowledges and understands all data, materials, specifications, and requirements identified in the Contract Documents.
 - (iii) Contractor has visited the site for the Project, conducted a thorough, visual examination of the site and adjacent areas, and become familiar with and is satisfied as to the general, local, and site conditions that may affect cost, progress, and performance in completing the Project.
 - (iv) Contractor is familiar with and is satisfied as to all laws and regulations that may affect cost, progress, and performance to complete the Project.
 - (v) Contractor has carefully studied all: (1) reports of explorations and tests of subsurface conditions at or adjacent to the site and all drawings of physical conditions relating to existing surface or subsurface structures at the site that have been identified in the Detail Specifications and any accompanying reports and drawings, and (2) reports and drawings relating to any Hazardous Environmental Condition at or adjacent to the site that have been identified in the Contract Documents and any accompanying reports and drawings.
 - (vi) Contractor has considered the information known to Contractor itself; information commonly known to contractors doing business in the locality of the Site; information and observations obtained from visits to the Site; the Contract Documents; and the Site-related reports and drawings identified in the Contract Documents, if any, with respect to the effect of such information, observations, and documents on (1) the cost, progress, and performance of the Work; (2) the means, methods, techniques, sequences, and procedures of construction to be employed by Contractor; and (3) Contractor's safety precautions and programs.
 - (vii) Based on the information and observations referred to in subsection "(v)" of this Section, Contractor agrees that no further examinations, investigations, explorations, tests, studies, or data are necessary for the performance of the Work at the Contract Price and in accordance with the other terms and conditions of the Contract Documents.
 - (viii) Contractor is aware of the general nature of work to be performed by PWC and others at the Site that relates to the Work as indicated in the Contract Documents.
 - (ix) Contractor has given PWC written notice of all conflicts, errors, ambiguities, or discrepancies that Contractor has discovered in the Contract Documents, and the written resolution thereof by PWC is acceptable to Contractor.
 - (x) The Contract Documents are generally sufficient to indicate and convey understanding of all terms and conditions for performance and furnishing of the Work.
 - (xi) Contractor's entry into this Agreement constitutes an incontrovertible representation by Contractor that, without exception, all prices in the Agreement are premised upon performing and furnishing the Work required by the Contract Documents.
 - (xii) Contractor has no business or personal relationship with any PWC Commissioner, officer, director, manager, or supervisor and Contractor covenants to disclose immediately to PWC any such relationship that develops during the performance of Work on the Project.

- (b) Contractor's obligation to perform and complete the Work in accordance with the Contract Documents shall be absolute. None of the following will constitute an acceptance of Work that is not in accordance with the Contract Documents or a release of Contractor's obligation to perform the Work in accordance with the Contract Documents:
 - (i) observations by Project Engineer;
 - (ii) recommendation by Project Engineer or payment by PWC of any progress or final payment;
 - (iii) the issuance of a certificate of Substantial Completion by Project Engineer or any payment related thereto by PWC;
 - (iv) use or occupancy of the Work or any part thereof by PWC;
 - (v) any review and approval of a Shop Drawing or Sample submittal;
 - (vi) the issuance of a notice of acceptability by Project Engineer;
 - (vii) any inspection, test, or approval by others; or
 - (viii) any correction of defective Work by PWC.
- (c) If the Contract Documents requires the Contractor to accept the assignment of a contract entered into by PWC, then the specific warranties, guarantees, and correction obligations contained in the assigned contract shall govern with respect to Contractor's performance obligations to PWC for the Work described in the assigned contract.

Section 7.15 Indemnification

- (a) Contractor shall indemnify, defend, and hold harmless PWC and its Commissioners, officers, employees, agents, and representatives and the City and its elected officials, managers, employees, agents, and representatives and Designer (collectively "Indemnitees") from and against all claims, actions, liabilities, damages, losses, costs, and expenses (including, without limitation, injury to or death of any persons and damage to property, economic and consequential damages and attorneys' fees) asserted by one or more third parties against one or more of the Indemnitees if the Fault of one or more Responsible Persons is a proximate cause of the loss, damage, or expense indemnified.
- (b) Contractor's obligation to indemnify, defend, and hold harmless the Indemnitees shall survive the termination of the Agreement.
- (c) In any and all claims against the Indemnitees of Contractor, any Subcontractor, any Supplier, or any individual or entity directly or indirectly employed by any of them to perform any of the Work, or anyone for whose acts any of them may be liable, Contractor's indemnification obligation shall not be limited in any way by any limitation on the amount or type of damages, compensation, or benefits payable by or for Contractor or any such Subcontractor, Supplier, or other individual or entity under workers' compensation acts, disability benefit acts, or other employee benefit acts.

Section 7.16 Claims Procedure

- (a) PWC shall notify the Contractor of all potential claims related to the Work within seven (7) calendar days of receiving notification or having knowledge of such potential claim. Should the Contractor receive a potential claim related to the Work, the Contractor shall notify PWC within seven (7) calendar days of receiving notification. The Contractor shall provide the claimant and PWC with a written response acknowledging receipt of the claim within

seven (7) calendar days.

- (b) If the Contractor meets with the Claimant about the claim, a representative designated by PWC shall be present at all times. PWC shall maintain a record of any claim received, and the steps taken to resolve. PWC shall also concurrently investigate each case. The Contractor agrees to furnish PWC any information regarding the claim, the actions which led to the claim and/or the investigation of the claim. Contractor shall provide their proposed response to PWC within thirty (30) calendar days of receiving the claim. Upon receipt of the response PWC and the Contractor will discuss and reach a mutual agreement of the response necessary to send to the Claimant within fifteen (15) calendar days. Once the agreement is made the Contractor shall make a formal written resolution to the claimant.
- (c) Failure to act in good faith or respond to a claim in the timelines established by the Contract Documents will constitute a lack of response by the Contractor, therefore validating the claim. PWC will deduct the total amount of the claim from the monthly pay application. Failure to comply with the above requirements for resolving claims may, at the sole discretion of PWC, result in breach of contract.
- (d) The Contractor is aware of these claims procedures and understands that it is the PWC's practice to pursue reimbursement/subrogation for any and all claims related expenses, which are incurred as a result of the Contractor's performance under this Contract Documents and allowed within the applicable statute of limitations.

Section 7.17 Delegation of Professional Design Services

- (a) Contractor will not be required to provide professional design services unless such services are specifically required by the Contract Documents for a portion of the Work or unless such services are required to carry out Contractor's responsibilities for construction means, methods, techniques, sequences and procedures. Contractor shall not be required to provide professional services in violation of applicable Laws and Regulations.
- (b) If professional design services or certifications by a design professional related to systems, materials, or equipment are specifically required of Contractor by the Contract Documents, PWC will specify all performance and design criteria that such services must satisfy. Contractor shall cause such services or certifications to be provided by a properly licensed professional, whose signature and seal shall appear on all drawings, calculations, specifications, certifications, and other submittals prepared by such professional. Shop Drawings and other submittals related to the Work designed or certified by such professional, if prepared by others, shall bear such professional's written approval when submitted to PWC.
- (c) PWC shall be entitled to rely upon the adequacy, accuracy, and completeness of the services, certifications, or approvals performed by such design professionals, provided PWC has specified to Contractor all performance and design criteria that such services must satisfy.
- (d) Pursuant to this Section, PWC's, or its designee's, review and approval of design calculations and design drawings will be only for the limited purpose of checking for conformance with performance and design criteria given and the design concept expressed in the Contract Documents. PWC specifically retains final approval of such

submittals.

- (e) Contractor shall not be responsible for the adequacy of the performance or design criteria specified by PWC.

Article VIII. PWC's Responsibilities

- (a) In awarding the bid to Contractor and executing the applicable Agreement, PWC acknowledges the following responsibilities:
 - (i) Except as otherwise provided in these General Conditions, PWC shall issue all communications directly to Contractor or its designee.
 - (ii) PWC may at its discretion replace Design Engineer and Project Engineer. The replacement Design Engineer or Project Engineer's status under the Contract Documents shall be that of the former Design Engineer or Project Engineer.
 - (iii) PWC shall promptly furnish the data required of PWC under the Contract Documents.
 - (iv) PWC shall make payments to Contractor when they are due as provided in the Contract Documents.
 - (v) PWC shall not supervise, direct, or have control or authority over, nor be responsible for, Contractor's means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or for any failure of Contractor to comply with Laws and Regulations applicable to the performance of the Work. PWC will not be responsible for Contractor's failure to perform the Work in accordance with the Contract Documents.
 - (vi) Upon request of Contractor, PWC shall furnish to Contractor reasonable evidence that financial arrangements have been made to satisfy PWC's obligations under the Contract Documents (including obligations under proposed changes in the Work).
 - (vii) While at the Site, PWC's employees and representatives shall comply with the specific applicable requirements of Contractor's safety programs of which PWC has been informed.
 - (viii) PWC shall furnish copies of any applicable PWC safety program(s) to Contractor, which Contractor shall review and implement.

Article IX. Amending the Contract Documents; Changes in the Work

Section 9.01 Amending and Supplementing Contract Documents

- (a) The Contract Documents may be amended or supplemented by a Change Order, a Work Change Directive, or a Field Order.
 - (i) Change Orders: If an amendment or supplement to the Contract Documents includes a change in the Contract Price or the Contract Times, such amendment or supplement must be set forth in a Change Order. A Change Order also may be used to establish amendments and supplements of the Contract Documents that do not affect the Contract Price or Contract Times.
 - (ii) Work Change Directives: A Work Change Directive will not change the Contract Price or the Contract Times, but is evidence that the parties expect that the modification ordered or documented by a Work Change Directive will be incorporated in a subsequently issued Change Order, following negotiations by the parties as to the Work Change Directive's effect, if any, on the Contract Price and Contract Times; or, if negotiations are

unsuccessful, by a determination under the terms of the Contract Documents governing adjustments, expressly including Paragraph 9.04 regarding change of Contract Price. Contractor must submit any Change Proposal seeking an adjustment of the Contract Price or the Contract Times, or both, no later than 30 days after the completion of the Work set out in the Work Change Directive. PWC must submit any dispute or request seeking an adjustment of the Contract Price or the Contract Times, or both, no later than 60 days after issuance of the Work Change Directive.

- (iii) Field Orders: Project Engineer may authorize minor changes in the Work if the changes do not involve an adjustment in the Contract Price or the Contract Times and are compatible with the design concept of the completed Project as a functioning whole as indicated by the Contract Documents. Such changes will be accomplished by a Field Order and will be binding on PWC and on Contractor, which shall perform promptly the Work involved. If Contractor believes that a Field Order justifies an adjustment in the Contract Price or Contract Times, or both, then before proceeding with the Work at issue, Contractor shall submit a Change Proposal as provided herein.

Section 9.02 PWC-Authorized Changes in the Work

- (a) Without invalidating the Agreement and without notice to any surety, PWC may, at any time or from time to time, order additions, deletions, or revisions in the Work. Such changes shall be supported by Design Engineer's recommendation when applicable and to the extent the change involves the design (as set forth in the Drawings, Specifications, or otherwise), or other engineering or technical matters. Such changes may be accomplished by a Change Order or by a Work Change Directive. Upon receipt of any such document, Contractor shall promptly proceed with the Work as revised. Nothing in this paragraph shall obligate Contractor to undertake work that Contractor reasonably concludes cannot be performed in a manner consistent with Contractor's safety obligations under the Contract Documents or Laws and Regulations.

Section 9.03 Unauthorized Changes in the Work

- (a) Contractor shall not be entitled to an increase in the Contract Price or an extension of the Contract Times with respect to any work performed that is not required by the Contract Documents, as amended, modified, or supplemented.

Section 9.04 Change of Contract Price

- (a) The Contract Price may only be changed by a Change Order. Any Change Proposal for an adjustment in the Contract Price shall comply with the provisions of these General Conditions.
- (b) An adjustment in the Contract Price will be determined as follows:
 - (i) where the Work involved is covered by unit prices contained in the Contract Documents, then by application of such unit prices to the quantities of the items involved; or
 - (ii) where the Work involved is not covered by unit prices contained in the Contract Documents, then by a mutually agreed lump sum (which may include an allowance for overhead and profit as agreed to in writing by the Parties); or
 - (iii) where the Work involved is not covered by unit prices contained in the Contract Documents and the Parties do not reach mutual agreement to a lump sum, then on the basis of the Cost of the Work plus a reasonable Contractor's fee for overhead and profit.

- (c) Contractor's Fee: When applicable, the Contractor's fee for overhead and profit shall be determined as follows:
 - (i) a mutually acceptable fixed fee; or
 - (ii) if a fixed fee is not agreed upon, then a fee based on the following percentages of the various portions of the Cost of the Work:
 - 1) for unit prices, the Contractor's fee shall be fifteen percent (15%);
 - 2) for all other costs incurred, the Contractor's fee shall be five percent (5%);
 - 3) the amount of credit to be allowed by Contractor to PWC for any change that results in a net decrease in the Contract Price will be the amount of the actual net decrease in cost plus a deduction in Contractor's fee by an amount equal to five percent of such net decrease; and
 - 4) when both additions and credits are involved in any one change, the adjustment in Contractor's fee shall be computed on the basis of the net change.

Section 9.05 Change of Contract Times

- (a) The Contract Times may only be changed by a Change Order. Any Change Proposal for an adjustment in the Contract Times shall comply with the provisions of Paragraph 9.06.
- (b) An adjustment of the Contract Times shall be subject to the limitations set forth in these Contract Document as it concerns delays in Contractor's progress.

Section 9.06 Change Proposals

- (a) Contractor shall submit a Change Proposal to PWC to request an adjustment in the Contract Times and/or Contract Price. The Change Proposal shall specify any proposed change in Contract Times or Contract Price, or both, or other proposed relief, and explain the reason for the proposed change, with citations to any governing or applicable provisions of the Contract Documents.
 - (i) Procedures: Contractor shall submit each Change Proposal to PWC promptly (but in no event later than 30 days) after the start of the event giving rise thereto, or after such initial decision. The Contractor shall submit supporting data, including the proposed change in Contract Price or Contract Time (if any), to PWC within 15 calendar days after the submittal of the Change Proposal. The supporting data shall be accompanied by a written statement that the supporting data are accurate and complete, and that any requested time or price adjustment is the entire adjustment to which Contractor believes it is entitled as a result of said event.
 - (ii) PWC Action: PWC will review each Change Proposal and, within 30 calendar days after receipt of the Contractor's supporting data, either deny the Change Proposal in whole, approve it in whole, or deny it in part and approve it in part. Such actions shall be in writing to Contractor. If PWC does not take action on the Change Proposal within 30 calendar days, then the Change Proposal is deemed denied, thereby commencing the time for appeal under these General Conditions.
 - (iii) Binding Decision: PWC's decision will be final and binding unless Contractor appeals the decision.

Section 9.07 Execution of Change Orders

- (a) PWC and Contractor shall execute appropriate Change Orders covering:
 - (i) changes in the Contract Price or Contract Times that are agreed to by the parties, including any undisputed sum or amount of time for Work performed in accordance with a Work Change Directive;
 - (ii) changes in Contract Price resulting from a PWC set-off, unless Contractor has duly contested such set-off;
 - (iii) changes in the Work which are: (a) ordered by PWC, (b) required because of PWC's acceptance of defective Work or PWC's correction of defective Work, or (c) agreed to by the parties, subject to the need for Design Engineer's recommendation if the change in the Work involves the design (as set forth in the Contract Documents), or other engineering or technical matters; and
 - (iv) changes in the Contract Price or Contract Times, or other changes, which embody the substance of any final and binding results.
- (b) If PWC or Contractor refuses to execute a Change Order that is required to be executed under the terms of this Section, it shall be deemed to be of full force and effect as if fully executed.

Section 9.08 Notification to Surety

- (a) If the provisions of any bond require notice to be given to a surety of any change affecting the general scope of the Work or the provisions of the Contract Documents (including, but not limited to, Contract Price or Contract Times), the giving of any such notice will be Contractor's responsibility. The amount of each applicable bond will be adjusted to reflect the effect of any such change.

Article X. Tests, Inspections, and Approvals; Correction, Removal, or Acceptance of Defective Work

Section 10.01 Access to Work

- (a) PWC, Design Engineer, their consultants and other representatives and personnel of PWC, independent testing laboratories, and authorities having jurisdiction will have access to the Site and the Work at reasonable times for their observation, inspection, and testing. Contractor shall provide them proper and safe conditions for such access and advise them of Contractor's safety procedures and programs so that they may comply therewith as applicable.

Section 10.02 Tests, Inspections, and Approvals

- (a) Contractor shall give Project Engineer timely notice of readiness of the Work (or specific parts thereof) for all required inspections and tests and shall cooperate with inspection and testing personnel to facilitate required inspections and tests.
- (b) PWC shall retain and pay for the initial services of an independent inspector, testing laboratory, or other qualified individual or entity to perform all inspections and tests expressly required by the Contract Documents to be furnished and paid for by PWC, except those costs incurred in connection with tests or inspections of covered Work shall

be governed by the provisions of Paragraph 10.05.

- (c) If Laws or Regulations of any public body having jurisdiction require any Work (or part thereof) specifically to be inspected, tested, or approved by an employee or other representative of such public body, Contractor shall assume full responsibility for arranging and obtaining such inspections, tests, or approvals, pay all costs in connection therewith, and furnish the required certificates of inspection or approval to PWC.
- (d) Contractor shall be responsible for arranging, obtaining, and paying for all inspections and tests required:
 - (i) by the Contract Documents, unless the Contract Documents expressly allocate responsibility for a specific inspection or test to PWC;
 - (ii) to attain PWC's and Design Engineer's acceptance of materials or equipment to be incorporated in the Work;
 - (iii) by manufacturers of equipment furnished under the Contract Documents;
 - (iv) for testing, adjusting, and balancing of mechanical, electrical, and other equipment to be incorporated into the Work; and
 - (v) for acceptance of materials, mix designs, or equipment submitted for approval prior to Contractor's purchase thereof for incorporation in the Work.

Such inspections and tests shall be performed by independent inspectors, testing laboratories, or other qualified individuals or entities acceptable to PWC, as confirmed in writing by Project Engineer to Contractor.

- (e) If the Contract Documents require the Work (or part thereof) to be approved by PWC or its designee, then Contractor shall assume full responsibility for arranging and obtaining such approvals.
- (f) If any Work (or the work of others) that is to be inspected, tested, or approved is covered by Contractor without written concurrence of Project Engineer, Contractor shall, if requested by Project Engineer, uncover such Work for observation. Such uncovering shall be at Contractor's expense unless Contractor had given PWC timely notice of Contractor's intention to cover the same and PWC had not acted with reasonable promptness in response to such notice.

Section 10.03 Defective Work

- (a) It is Contractor's obligation to assure that the Work is not defective.
- (b) PWC or its designee has the authority to determine whether Work is defective, and to reject defective Work.
- (c) Prompt notice of all defective Work of which PWC has actual knowledge will be given to Contractor.
- (d) Promptly after receipt of written notice of defective Work, Contractor shall correct all such defective Work, whether or not fabricated, installed, or completed, or, if PWC has rejected the defective Work, remove it from the Project and replace it with Work that is not defective.

- (e) When correcting defective Work, Contractor shall take no action that would void or otherwise impair PWC's special warranty and guarantee, if any, on said Work.
- (f) In addition to its correction, removal, and replacement obligations with respect to defective Work, Contractor shall pay all claims, costs, losses, and damages arising out of or relating to defective Work, including but not limited to the cost of the inspection, testing, correction, removal, replacement, or reconstruction of such defective Work, fines levied against PWC by governmental authorities because the Work is defective, and the costs of repair or replacement of work of others resulting from defective Work. Prior to final payment, if PWC and Contractor are unable to agree as to the measure of such claims, costs, losses, and damages resulting from defective Work, then PWC may impose a reasonable set-off against payments due.

Section 10.04 Acceptance of Defective Work

- (a) If, instead of requiring correction or removal and replacement of defective Work, PWC prefers to accept it, PWC may do so (subject, if such acceptance occurs prior to final payment, to Design Engineer's confirmation that such acceptance is in general accord with the design intent and applicable engineering principles and will not endanger public safety).
- (b) Contractor shall pay all claims, costs, losses, and damages attributable to PWC's evaluation of and determination to accept such defective Work (such costs to be approved by PWC as to reasonableness), and for the diminished value of the Work to the extent not otherwise paid by Contractor. If any such acceptance occurs prior to final payment, the necessary revisions in the Contract Documents with respect to the Work shall be incorporated in a Change Order.
- (c) If the parties are unable to agree as to the decrease in the Contract Price, reflecting the diminished value of Work so accepted, then PWC may impose a reasonable set-off against payments due. If the acceptance of defective Work occurs after final payment, Contractor shall pay an appropriate amount to PWC.

Section 10.05 Uncovering Work

- (a) PWC has discretion to require, at its initial cost, additional inspection or testing of the Work, whether or not the Work is fabricated, installed, or completed.
- (b) If any Work is covered contrary to the written request of PWC, then Contractor shall, if requested by PWC or its designee, uncover such Work for observation, and then replace the covering, all at Contractor's expense.
- (c) If PWC considers it necessary or advisable that covered Work be observed by PWC or inspected or tested by others, then Contractor, at PWC's request, shall uncover, expose, or otherwise make available for observation, inspection, or testing as PWC may require, that portion of the Work in question, and provide all necessary labor, material, and equipment.
 - (i) If it is found that the uncovered Work is defective, Contractor shall be responsible for all claims, costs, losses, and damages arising out of or relating to such uncovering, exposure, observation, inspection, and testing, and of satisfactory replacement or reconstruction (including but not limited to all costs of repair or replacement of work of others); and pending Contractor's full discharge of this responsibility PWC shall be entitled to impose a reasonable set-off against payments due.

- (ii) If the uncovered Work is not found to be defective, Contractor shall be allowed an increase in the Contract Price or an extension of the Contract Times, or both, directly attributable to such uncovering, exposure, observation, inspection, testing, replacement, and reconstruction. If the parties are unable to agree as to the amount or extent thereof, then Contractor may submit a Change Proposal within 30 calendar days of the determination that the Work is not defective.

Section 10.06 PWC May Stop the Work

- (a) If the Work is defective, or Contractor fails to supply sufficiently skilled workers or suitable materials or equipment, or fails to perform the Work in such a way that the completed Work will conform to the Contract Documents, then PWC may order Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, this right of PWC to stop the Work shall not give rise to any duty on the part of PWC to exercise this right for the benefit of Contractor, any Subcontractor, any Supplier, any other individual or entity, or any surety for, or employee or agent of any of them.

Section 10.07 PWC May Correct Defective Work

- (a) If Contractor fails within the time specified by PWC in a written notice from PWC to correct defective Work, or to remove and replace rejected Work as required by PWC, or if Contractor fails to perform the Work in accordance with the Contract Documents, or if Contractor fails to comply with any other provision of the Contract Documents, then PWC may, after seven (7) calendar days written notice to Contractor, correct or remedy any such deficiency.
- (b) In exercising the rights and remedies under this Section, PWC shall proceed expeditiously. In connection with such corrective or remedial action, PWC may exclude Contractor from all or part of the Site, take possession of all or part of the Work and suspend Contractor's services related thereto, and incorporate in the Work all materials and equipment stored at the Site or for which PWC has paid Contractor but which are stored elsewhere. Contractor shall allow PWC and its officers, employees, representatives, agents and other contractors, and Design Engineer and its employees and agents access to the Site to enable PWC to exercise the rights and remedies under this Section.
- (c) All claims, costs, losses, and damages incurred or sustained by PWC in exercising the rights and remedies under this Section will be charged against Contractor as set-offs against payments due. Such claims, costs, losses and damages will include but not be limited to all costs of repair, or replacement of work of others destroyed or damaged by correction, removal, or replacement of Contractor's defective Work.
- (d) Contractor shall not be allowed an extension of the Contract Times because of any delay in the performance of the Work attributable to the exercise by PWC of PWC's rights and remedies under this Section.

Article XI. Claims

Section 11.01 Claims Process

- (a) The following disputes between PWC and Contractor shall be submitted to the Claims process set forth in this Article:

- (i) Appeals by PWC or Contractor of Design Engineer's decisions regarding Change Proposals;
- (ii) PWC or Contractor's demands for adjustments in the Contract Price or Contract Times, or other relief under the Contract Documents; and
- (iii) Disputes that Design Engineer has been unable to address because they do not involve the design (as set forth in the Contract Documents), the acceptability of the Work, or other engineering or technical matters.

Section 11.02 Submittal of Claim

- (a) The party submitting a claim shall deliver it directly to the other party to the Agreement promptly (but in no event later than 30 calendar days) after the start of the event giving rise thereto; in the case of appeals regarding Change Proposals within 30 calendar days of the decision under appeal. The responsibility to substantiate a claim shall rest with the party making the claim. In the case of a claim by Contractor seeking an increase in the Contract Times or Contract Price, or both, Contractor shall certify that the claim is made in good faith, that the supporting data are accurate and complete, and that to the best of Contractor's knowledge and belief the amount of time or money requested accurately reflects the full amount to which Contractor is entitled.

Section 11.03 Review and Resolution

- (a) The party receiving a Claim shall review it thoroughly, giving full consideration to its merits. The two parties shall seek to resolve the Claim through the exchange of information and direct negotiations. The parties may extend the time for resolving the Claim by mutual agreement. All actions taken on a Claim shall be stated in writing and submitted to the other party.

Section 11.04 Dispute Resolution

- (a) In the event of any dispute, controversy, or claim of any kind or nature arising under or in connection with this Agreement (a "Dispute") and involving any two or more of the following parties, PWC, Design Engineer, Contractor or any subcontractor of Contractor, the party initiating the Dispute shall serve written notice of a Dispute on the party(ies) to the dispute, and those parties shall endeavor to settle the dispute first through direct, informal discussions between the parties' selected representatives. Any such representative(s) shall have binding authority to settle the Dispute. In the event the parties do not settle the Dispute within ten (10) calendar days from the date of written notice of the Dispute, any party to the Dispute may, by written notice to the other party(ies), engage a mediator certified under the laws of the State of North Carolina to mediate the Dispute within thirty (30) calendar days of such notice. The parties to the Dispute shall attend mediation in good faith. In the event mediation is unsuccessful, any party to the dispute may initiate arbitration proceedings. Any controversy or claim arising out of or relating to the Contract Documents, or the breach thereof, shall be settled by binding arbitration administered by the American Arbitration Association under its Construction Industry Arbitration Rules, and judgment on the award rendered by the arbitrator(s) may be entered in any court having jurisdiction thereof. All of the foregoing dispute resolution procedures shall be held in Cumberland County, North Carolina. The costs of the mediator and arbitrator in a dispute resolution process shall be divided equally among the parties to the process; provided, however, PWC shall bear at least one-third of the cost if PWC is a party to the dispute resolution and the remainder of the cost shall be divided equally among the other parties

participating in the dispute resolution. PWC shall, in its contractual arrangements with Design Engineer, and Contractor shall, in its contracts with Subcontractors and they in their contracts with lower-tier subcontractors authorize and direct such parties to participate in the dispute resolution procedures set forth in this Section. Unless otherwise directed in writing by PWC, Contractor shall continue the Project and maintain compliance with the scheduling deadlines set forth in the Contract Documents during any dispute resolution proceedings. If Contractor continues to perform, PWC shall make payments due for the continued performance in accordance with this Agreement. The provisions of this Section shall not extend any applicable statutes of limitation or repose.

Article XII. Payments to Contractor; Set-Offs; Completion; Correction Period

Section 12.01 Progress Payments

- (a) The Schedule of Values will serve as the basis for progress payments and will be incorporated into a form of Application for Payment acceptable to the Project Engineer. Progress payments on account of Unit Price Work will be based on the number of units completed during the pay period. Progress payments for cost-based Work will be based on the Cost of the Work completed by the Contractor during the pay period.
- (b) Applications for Payments:
 - (i) Contractor shall submit to Project Engineer for review an Application for Payment filled out and signed by Contractor covering the Work completed as of the date of the Application and accompanied by such supporting documentation as is required by the Contract Documents. If payment is requested on the basis of materials and equipment not incorporated in the Work but delivered and suitably stored at the Site or another location agreed to in writing, the Application for Payment shall also be accompanied by a bill of sale, invoice, or other documentation warranting that PWC has received the materials and equipment free and clear, and evidence that the materials and equipment are covered by appropriate property insurance, a warehouse bond, or other arrangements to protect PWC's interest.
 - (ii) Beginning with the second Application for Payment, each Application shall include an affidavit of Contractor stating that all previous progress payments received on account of the Work have been applied on account to discharge Contractor's legitimate obligations associated with prior Applications for Payment.
 - (iii) The amount of retainage for progress payments will be as stipulated in the Contract Documents.
- (c) Review of Applications:
 - (i) Project Engineer will, within ten (10) Business Days after receipt of each Application for Payment, including each resubmittal, either indicate in writing a recommendation of payment and present the Application to PWC, or return the Application to Contractor indicating in writing Project Engineer's reason(s) for refusing to recommend payment. In the latter case, the Contractor may make the necessary corrections and resubmit the Application.
 - (ii) Project Engineer's recommendation of any payment requested in an Application for Payment will constitute a representation by Project Engineer to PWC, based on Project Engineer's observations of the executed Work, and on Project Engineer's review of the

Application for Payment and the accompanying data and schedules, that to the best of Project Engineer's knowledge, information, and belief:

- 1) the Work has progressed to the point indicated;
 - 2) the quality of the Work is generally in accordance with the Contract Documents (subject to an evaluation of the Work as a functioning whole prior to or upon Substantial Completion, the results of any subsequent tests called for in the Contract Documents, a final determination of quantities and classifications for Unit Price Work, and any other qualifications stated in the recommendation); and
 - 3) the conditions precedent to Contractor's being entitled to such payment appear to have been fulfilled in so far as it is Project Engineer's responsibility to observe the Work.
- (iii) By recommending any such payment Project Engineer will not thereby be deemed to have represented that:
- 1) inspections made to check the quality or the quantity of the Work as it has been performed have been exhaustive, extended to every aspect of the Work in progress, or involved detailed inspections of the Work beyond the responsibilities specifically assigned to Project Engineer in the Contract Documents; or
 - 2) there may not be other matters or issues between the parties that might entitle Contractor to be paid additionally by PWC or entitle PWC to withhold payment to Contractor.
- (iv) Neither Project Engineer's review of Contractor's Work for the purposes of recommending payments nor Project Engineer's recommendation of any payment, including final payment, will impose responsibility on Project Engineer:
- 1) to supervise, direct, or control the Work, or
 - 2) for the means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or
 - 3) for Contractor's failure to comply with Laws and Regulations applicable to Contractor's performance of the Work, or
 - 4) to make any examination to ascertain how or for what purposes Contractor has used the money paid on account of the Contract Price.
- (v) Project Engineer may refuse to recommend the whole or any part of any payment if, in Project Engineer's opinion, it would be incorrect to make the representations to PWC outlined in this Section.
- (d) Project Engineer will recommend reductions in payment (set-offs) necessary in Project Engineer's opinion to protect PWC from loss because:
- (i) the Work is defective, requiring correction or replacement;
 - (ii) the Contract Price has been reduced by Change Orders;
 - (iii) PWC has been required to correct defective Work or has accepted defective Work in accordance with these General Conditions;
 - (iv) PWC has been required to remove or remediate a Hazardous Environmental Condition for which Contractor is responsible; or
 - (v) Project Engineer has actual knowledge of the occurrence of any of the events that would constitute a default by Contractor and therefore justify termination for cause under the Contract Documents.

(e) Payment Becomes Due:

- (i) Twenty (20) Business Days after presentation of the Application for Payment to PWC with Project Engineer's recommendation, the amount recommended (subject to any PWC set offs) will become due, and when due will be paid by PWC to Contractor.

(f) Reductions in Payment by PWC:

- (i) In addition to any reductions in payment (set-offs) recommended by Project Engineer, PWC is entitled to impose a set-off against payment based on any of the following:

- 1) PWC has incurred costs, losses, or damages on account of Contractor's conduct in the performance or furnishing of the Work, including but not limited to claims, costs, losses, or damages from workplace injuries, adjacent property damage, non-compliance with Laws and Regulations, and patent infringement;
- 2) Contractor has failed to take reasonable and customary measures to avoid damage, delay, disruption, and interference with other work at or adjacent to the Site;
- 3) Contractor has failed to provide and maintain required bonds or insurance;
- 4) PWC has been required to remove or remediate a Hazardous Environmental Condition for which Contractor is responsible;
- 5) PWC has incurred extra charges or engineering costs related to submittal reviews, evaluations of proposed substitutes, tests and inspections, or return visits to manufacturing or assembly facilities;
- 6) the Work is defective, requiring correction or replacement;
- 7) PWC has been required to correct defective Work or has accepted defective Work in accordance with the Contract Documents;
- 8) the Contract Price has been reduced by Change Orders;
- 9) an event that would constitute a default by Contractor and therefore justify a termination for cause has occurred;
- 10) liquidated damages have accrued as a result of Contractor's failure to achieve Milestones, Substantial Completion, or Completion of the Project; or
- 11) there are other items entitling PWC to a set off against the amount recommended.

- (ii) If PWC imposes any set-off against payment, whether based on its own knowledge or on the written recommendations of Project Engineer, PWC will give Contractor immediate written notice stating the reasons for such action and the specific amount of the reduction, and promptly pay Contractor any amount remaining after deduction of the amount so withheld. PWC shall promptly pay Contractor the amount so withheld, or any adjustment agreed to by PWC and Contractor if Contractor remedies the reasons for such action. The reduction imposed shall be binding on Contractor unless it duly submits a Change Proposal contesting the reduction.

- (iii) Upon a subsequent determination that PWC's refusal of payment was not justified, the amount wrongfully withheld shall be treated as an amount due and subject to interest as provided in the Contract Documents.

Section 12.02 Substantial Completion

- (a) When Contractor considers the entire Work ready for its intended use Contractor shall notify PWC and Design Engineer in writing that the entire Work is substantially complete and request that PWC acknowledge in writing that Contractor has met Substantial Completion.

- (b) Promptly after Contractor's notification, PWC, Contractor, and Design Engineer shall make an inspection of the Work to determine the status of completion. If PWC does not consider the Work substantially complete, PWC will notify Contractor in writing giving the reasons therefor. PWC shall thereafter submit to Contractor an initial draft of punch list items to be completed or corrected before final payment.
- (c) If Design Engineer considers the Work substantially complete, Design Engineer will deliver to PWC a preliminary certificate of Substantial Completion which shall fix the date of Substantial Completion. Design Engineer shall attach to the certificate a punch list of items to be completed or corrected before final payment. PWC shall have seven (7) Business Days after receipt of the preliminary certificate to make written objection to Design Engineer as to any provisions of the certificate or attached punch list. If, after considering the objections to the provisions of the preliminary certificate, PWC concludes that the Work is not substantially complete, PWC will, within fourteen (14) calendar days after submission of the preliminary certificate to PWC, notify Contractor in writing that the Work is not substantially complete, stating the reasons therefor.
- (d) At the time of receipt of the preliminary certificate of Substantial Completion, PWC and Contractor will confer regarding PWC's use or occupancy of the Work following Substantial Completion, review the builder's risk insurance policy with respect to the end of the builder's risk coverage, and confirm the transition to coverage of the Work under a permanent property insurance policy held by PWC. Unless PWC and Contractor agree otherwise in writing, PWC shall bear responsibility for security, operation, protection of the Work, property insurance, maintenance, heat, and utilities upon PWC use or occupancy of the Work.
- (e) After Substantial Completion the Contractor shall promptly begin work on the punch list of items to be completed or corrected prior to final payment and shall complete such items within the time specified by PWC. In appropriate cases Contractor may submit monthly Applications for Payment for completed punch list items, following the progress payment procedures set forth above.
- (f) PWC shall have the right to exclude Contractor from the Site after the date of Substantial Completion subject to allowing Contractor reasonable access to remove its property and complete or correct items on the punch list.

Section 12.03 Partial Use or Occupancy

- (a) Prior to Substantial Completion of all the Work, PWC may use or occupy any substantially completed part of the Work which has specifically been identified in the Contract Documents, or which PWC, Design Engineer, and Contractor agree constitutes a separately functioning and usable part of the Work that can be used by PWC for its intended purpose without significant interference with Contractor's performance of the remainder of the Work, subject to the following conditions:
 - (i) At any time PWC may request in writing that Contractor permit PWC to use or occupy any such part of the Work that PWC believes to be substantially complete.
 - (ii) At any time Contractor may notify PWC and Design Engineer in writing that Contractor considers any such part of the Work substantially complete and request Design Engineer

- to issue a certificate of Substantial Completion for that part of the Work.
- (iii) Within a reasonable time after either such request, PWC, Contractor, and Design Engineer shall make an inspection of that part of the Work to determine its status of completion. If Design Engineer does not consider that part of the Work to be substantially complete, Design Engineer will notify PWC and Contractor in writing giving the reasons therefor.
 - (iv) No use or occupancy or separate operation of part of the Work may occur prior to compliance with the requirements regarding builder's risk or other property insurance.

Section 12.04 Final Inspection

- (a) Upon written notice from Contractor that Completion of the Project has been achieved or an agreed portion thereof is complete, PWC will promptly make a final inspection with Project Engineer, Design Engineer, and Contractor and will notify Contractor in writing of all particulars in which this inspection reveals that the Work, or agreed portion thereof, is incomplete or defective. Contractor shall immediately take such measures as are necessary to complete such Work or remedy such deficiencies.

Section 12.05 Final Payment

- (a) Application for Payment:
 - (i) After Contractor has, in the opinion of PWC, satisfactorily completed all corrections identified during the final inspection and has delivered, in accordance with the Contract Documents, all maintenance and operating instructions, schedules, guarantees, bonds, certificates or other evidence of insurance, certificates of inspection, annotated record documents, and other documents, Contractor may make application for final payment.
 - (ii) The final Application for Payment shall be accompanied (except as previously delivered) by:
 - 1) all documentation called for in the Contract Documents;
 - 2) consent of the surety, if any, to final payment;
 - 3) satisfactory evidence that all title issues have been resolved such that title to all Work, materials, and equipment has passed to PWC free and clear or will so pass upon final payment;
 - 4) a list of all disputes that Contractor believes are unsettled; and
 - 5) complete and legally effective releases or waivers (satisfactory to PWC) required by the Contract Documents.
 - (iii) If Design Engineer is satisfied that the Work has been completed and Contractor's other obligations under the Contract have been fulfilled, Design Engineer will, within ten (10) Business Days after receipt of the final Application for Payment, indicate in writing Design Engineer's recommendation of final payment and present the Application for Payment to PWC for payment. Such recommendation shall account for any set-offs against payment that are necessary in Design Engineer's opinion to protect PWC from loss for the reasons stated above with respect to progress payments. At the same time Design Engineer will also give written notice to PWC and Contractor that the Work is acceptable and that Completion of the Project has been achieved. Otherwise, Design Engineer will return the Application for Payment to Contractor, indicating in writing the reasons for refusing to recommend final payment, in which case Contractor shall make the necessary corrections and resubmit the Application for Payment.
 - (iv) Within thirty (30) calendar days after the presentation to PWC of the final Application for

Payment and accompanying documentation, the amount recommended by Design Engineer (less any further sum PWC is entitled to set off against Design Engineer's recommendation, including but not limited to set-offs for liquidated damages and set-offs allowed under the provisions above with respect to progress payments) will become due and shall be paid by PWC to Contractor.

Section 12.06 Waiver of Claims

- (a) The making of final payment will not constitute a waiver by PWC of claims or rights against Contractor. PWC expressly reserves claims and rights arising from defective Work appearing after final inspection, from Contractor's failure to comply with the Contract Documents or the terms of any special guarantees specified therein, from Contractor's indemnification obligations, or from Contractor's continuing obligations under the Contract Documents.
- (b) The acceptance of final payment by Contractor will constitute a waiver by Contractor of all claims and rights against PWC other than those pending matters that have been duly submitted or appealed under the provisions of the Contract Documents.

Section 12.07 Correction Period

- (a) If within one (1) year after the date of Substantial Completion (or such longer period of time as may be prescribed by the terms of any applicable special guarantee required by the Contract Documents, or by any specific provision of the Contract Documents), any Work is found to be defective, or if the repair of any damages to the Site, adjacent areas that Contractor has arranged to use through construction easements or otherwise, and other adjacent areas used by Contractor as permitted by Laws and Regulations, is found to be defective, then Contractor shall promptly, without cost to PWC and in accordance with PWC's written instructions:
 - (i) correct the defective repairs to the Site or such other adjacent areas;
 - (ii) correct such defective Work;
 - (iii) if the defective Work has been rejected by PWC, remove it from the Project and replace it with Work that is not defective, and
 - (iv) satisfactorily correct or repair or remove and replace any damage to other Work, to the work of others, or to other land or areas resulting therefrom.
- (b) If Contractor does not promptly comply with the terms of PWC's written instructions, or in an emergency where delay would cause serious risk of loss or damage, PWC may have the defective Work corrected or repaired or may have the rejected Work removed and replaced. Contractor shall pay all claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals and all court or arbitration or other dispute resolution costs) arising out of or relating to such correction or repair or such removal and replacement (including but not limited to all costs of repair or replacement of work of others).
- (c) In special circumstances where a particular item of equipment is placed in continuous service before Substantial Completion of all the Work, the correction period for that item may start to run from an earlier date only as provided in the Contract Documents.
- (d) Where defective Work (and damage to other Work resulting therefrom) has been corrected or removed and replaced under this Article XII, the correction period hereunder with

respect to such Work will be extended for an additional period of one year after such correction or removal and replacement has been satisfactorily completed.

- (e) Contractor's obligations under this Article XII are in addition to all other obligations and warranties. The provisions of this Article XII shall not be construed as a substitute for, or a waiver of, the provisions of any applicable statute of limitation or repose.

Article XIII. Suspension of Work and Termination

Section 13.01 PWC May Suspend Work

- (a) At any time and without cause, PWC may suspend the Work or any portion thereof for a period of not more than 90 consecutive calendar days by written notice to Contractor and Design Engineer. Such notice will fix the date on which Work will be resumed. Contractor shall resume the Work on the date so fixed. Contractor shall be entitled to an adjustment in the Contract Price or an extension of the Contract Times, or both, directly attributable to any such suspension. Any Change Proposal seeking such adjustments shall be submitted no later than thirty (30) calendar days after the date fixed for resumption of Work.

Section 13.02 PWC May Terminate for Cause

- (a) The occurrence of any one or more of the following events will constitute a default by Contractor and justify termination for cause:
 - (i) Contractor's continued failure to perform the Work in accordance with the Contract Documents (including, but not limited to, failure to supply sufficient skilled workers or suitable materials or equipment or failure to adhere to the Progress Schedule);
 - (ii) Failure of Contractor to perform or otherwise to comply with a material term of the Contract Documents;
 - (iii) Contractor's disregard of Laws or Regulations of any public body having jurisdiction; or
 - (iv) Contractor's repeated disregard of the authority of PWC, Project Engineer, or Design Engineer.
- (b) If one or more of the events identified in Paragraph 13.02(a) occurs, then after giving Contractor (and any surety) ten (10) calendar days written notice that PWC is considering a declaration that Contractor is in default and termination of the Agreement, PWC may proceed to:
 - (i) declare Contractor to be in default, and give Contractor (and any surety) notice that the Contract is terminated; and
 - (ii) enforce the rights available to PWC under any applicable performance bond.
- (c) Subject to the terms and operation of any applicable performance bond, if PWC has terminated the Contract for cause, PWC may exclude Contractor from the Site, take possession of the Work, incorporate in the Work all materials and equipment stored at the Site or for which PWC has paid Contractor but which are stored elsewhere, and complete the Work as PWC may deem expedient.
- (d) PWC may not proceed with termination of the Contract under Paragraph 13.02(b) if Contractor within seven (7) calendar days of receipt of notice of intent to terminate begins to correct its failure to perform and proceeds diligently to cure such failure and such efforts

are agreed to by PWC.

- (e) If PWC proceeds as provided in Paragraph 13.02(b), Contractor shall not be entitled to receive any further payment until the Work is completed. If the unpaid balance of the Contract Price exceeds the cost to complete the Work, including all related claims, costs, losses, and damages (including but not limited to all fees and charges of engineers, architects, attorneys, and other professionals) sustained by PWC, such excess will be paid to Contractor. If the cost to complete the Work including such related claims, costs, losses, and damages exceeds such unpaid balance, Contractor shall pay the difference to PWC. Such claims, costs, losses, and damages incurred by PWC will be reviewed by PWC as to their reasonableness and, when so approved by PWC, incorporated in a Change Order.
- (f) Where Contractor's services have been so terminated by PWC, the termination will not affect any rights or remedies of PWC against Contractor then existing or which may thereafter accrue, or any rights or remedies of PWC against Contractor or any surety under any payment bond or performance bond. Any retention or payment of money due Contractor by PWC will not release Contractor from liability.
- (g) The provisions of any applicable payment or performance bond shall govern over any inconsistent provisions of this Section.

Section 13.03 PWC May Terminate For Convenience

- (a) Upon seven (7) calendar days written notice to Contractor, PWC may, without cause and without prejudice to any other right or remedy of PWC, terminate the Contract. In such case, Contractor shall be paid for (without duplication of any items):
 - (i) completed and acceptable Work executed in accordance with the Contract Documents prior to the effective date of termination, including fair and reasonable sums for overhead and profit on such Work;
 - (ii) expenses sustained prior to the effective date of termination in performing services and furnishing labor, materials, or equipment as required by the Contract Documents in connection with uncompleted Work, plus fair and reasonable sums for overhead and profit on such expenses; and
 - (iii) other reasonable expenses directly attributable to termination, including costs incurred to prepare a termination for convenience cost proposal.
- (b) Contractor shall not be paid on account of loss of anticipated overhead, profits, or revenue, or other economic loss arising out of or resulting from such termination.

Section 13.04 Contractor May Stop Work or Terminate

- (a) If, through no act or fault of Contractor, (1) the Work is suspended for more than ninety (90) consecutive calendar days by PWC or under an order of court or other public authority or (2) PWC fails for sixty (60) calendar days to pay Contractor any sum finally determined to be due, then Contractor may, upon seven (7) calendar days written notice to PWC, and provided PWC does not remedy such suspension or failure within that time, terminate the Contract and recover from PWC payment on the same terms as provided in this Article.
- (b) In lieu of terminating the Contract and without prejudice to any other right or remedy, if PWC has failed for thirty (30) calendar days to pay Contractor any sum finally determined to be due, Contractor may, seven (7) calendar days after written notice to PWC, stop the Work until payment is made of all such amounts due Contractor, including interest thereon.

The provisions of this paragraph are not intended to preclude Contractor from submitting a Change Proposal for an adjustment in Contract Price or Contract Times or otherwise for expenses or damage directly attributable to Contractor's stopping the Work as permitted by this paragraph.

Section 13.05 Morality

- (a) If, in the sole opinion of PWC, at any time Contractor or any of its owner(s) or employee(s) or agent(s) (each party, owner, employee, and agent is an "Actor") engages in any one or more actions that bring disrepute, contempt, scandal, or public ridicule to the Actor or subject the Actor to prosecution or offend the community or public morals or decency or denigrate individuals or groups in the community served by PWC or are scandalous or inconsistent with community standards or good citizenship or may adversely affect PWC's finances, public standing, image, or reputation or are embarrassing or offensive to PWC or may reflect unfavorably on PWC or are derogatory or offensive to one or more employee(s) or customer(s) of PWC, PWC may immediately upon written notice to Contractor terminate the Agreement, in addition to any other rights and remedies that PWC may have pursuant to the Contract Documents or at law or in equity.

Article XIV. Miscellaneous

Section 14.01 Additional General Terms and Conditions

- (a) Contractor shall be subject to any additional terms and conditions for this Project as set forth in the applicable Appendices as specific in the Agreement, which is incorporated by reference as if set forth word-for-word herein.

Section 14.02 Giving Notice

- (a) Whenever any provision of the Contract Documents requires the giving of written notice, it will be deemed to have been validly given if:
 - (i) delivered in person, by a commercial courier service or otherwise, to the individual or to a member of the firm or to an officer of the corporation for which it is intended;
 - (ii) delivered at or sent by registered or certified mail, postage prepaid, to the last business address known to the sender of the notice; or
 - (iii) sent to PWC or Contractor's designee(s) via email, with a confirmation of receipt.

Section 14.03 Computation of Times

- (a) When any period of time is referred to in the Contract by days, it will be computed to exclude the first and include the last day of such period. If the last day of any such period falls on a Saturday or Sunday or on a day made a legal holiday by the law of the applicable jurisdiction, such day will be omitted from the computation.

Section 14.04 Cumulative Remedies

- (a) The duties and obligations imposed by these General Conditions and the rights and remedies available hereunder to the parties are in addition to, and are not to be construed in any way as a limitation of, any rights and remedies available to any or all of them which

are otherwise imposed or available by Laws or Regulations, by special warranty or guarantee, or by other provisions of the Contract Documents. The provisions of this paragraph will be as effective as if repeated specifically in the Contract Documents in connection with each particular duty, obligation, right, and remedy to which they apply.

Section 14.05 Limitation of Damages

- (a) With respect to any and all Change Proposals, Claims, disputes subject to final resolution, and other matters at issue, neither PWC nor Design Engineer, nor any of their officers, directors, members, partners, employees, agents, consultants, or subcontractors, shall be liable to Contractor for any claims, costs, losses, or damages sustained by Contractor on or in connection with any other project or anticipated project.

Section 14.06 No Waiver

- (a) A party's non-enforcement of any provision shall not constitute a waiver of that provision, nor shall it affect the enforceability of that provision or any other provision of the Contract Documents.

Section 14.07 Survival of Obligations

- (a) All representations, indemnifications, warranties, and guarantees made in, required by, or given in accordance with the Contract Documents, as well as all continuing obligations indicated in the Contract Documents, will survive final payment, completion, and acceptance of the Work or termination or completion of the Agreement or termination of the services of Contractor.

Section 14.08 Controlling Law

- (a) The Agreement shall be governed by the law of the State of North Carolina.

Section 14.09 Headings

- (a) Article and paragraph headings, numbers, and letters are inserted for convenience only and do not constitute parts of these General Conditions.

DIVISION 1

PERFORMANCE BOND

Date of Execution: _____

Name of Principal: _____

(Contractor)

Name of Surety: _____

Name of Contracting

Body: Fayetteville Public Works Commission, Fayetteville, N.C.

Amount of Bond: _____

PROJECT: PWC2627014 - TRANSMISSION STEEL POLE REPLACEMENT FOR TOM STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

KNOW ALL MEN BY THESE PRESENTS, That We, the Principal and Surety above named, are held and firmly bound unto the above named Contracting Body, hereinafter called the Contracting Body, in the penal sum of the amount stated above the payment of which sum well and truly to be made, we bind ourselves, our heirs, executors, administrators, and successors, jointly and severally, firmly by these present.

THE CONDITION OF THIS OBLIGATION IS SUCH that whereas the Principal entered into a certain Contract with the Contracting Body, identified as shown above and hereto attached.

NOW, THEREFORE, if the Principal shall well and truly perform and fulfill all the undertakings, covenants, terms, conditions, and agreements of said Contract during the original term of said Contract and any extensions there of that may be granted by the Contracting Body, with or without notice to the Surety, and during the life of any Guaranty required under the Contract, and shall also well and truly perform and fulfill all the undertakings, covenants, terms, conditions, and agreements of any and all duly authorized modifications of said Contract that may hereafter be made, notice of which modifications to the Surety being hereby waived, then, this obligation to be void; otherwise to remain in full force and virtue.

IN WITNESS WHEREOF, the above bounded parties have executed this instrument under the several seals on the date indicated above, the name and corporate seal of each corporate party being hereto affixed, and these presents duly signed by its undersigned representative, pursuant to authority of its governing body.

Executed in _____ counterparts.

PWC2627014 - TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

Witness:

(Proprietorship of Partnership)

By:

Title:

(Corporate Secretary or
Assistant Secretary, Only)

CONTRACTOR:

(Trade or Corporate Name)

By:

Title:

(Owner, Partner, Corporate President or
Vice-President, Only)
(CORPORATE SEAL)

Witness:

Countersigned:

(N.C. Licensed Resident Agent)

SURETY COMPANY:

(Surety Company Name)

By:

Title:

(Attorney in Fact)
(SURETY CORPORATE SEAL)

PAYMENT BOND

Date of Execution: _____

Name of Principal: _____
(Contractor)

Name of Surety: _____

Name of Contracting

Body: Fayetteville Public Works Commission, Fayetteville, N.C.

Amount of Bond: _____

PROJECT: PWC2627014 - TRANSMISSION STEEL POLE REPLACEMENT FOR TOM STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

KNOW ALL MEN BY THESE PRESENTS, that We, the PRINCIPAL and Surety above named, are held and firmly bound unto the above named Contracting Body, hereinafter called the Contracting Body, in the penal sum of the amount stated above the payment of which sum well and truly to be made, we bind ourselves, our heirs, executors, administrators, and successors, jointly and severally, firmly by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH that whereas the Principal entered into a certain Contract with the Contracting Body, identified as shown above and hereto attached.

NOW THEREFORE, if the Principal shall promptly make payment to all persons supplying labor and material in the prosecution of the work provided for in said contract, and any and all duly authorized modifications of said contract that may hereafter be made, notice of which modifications to the Surety being hereby waived, then, this obligation to be void; otherwise to remain in full force and virtue.

IN WITNESS WHEREOF, the above bounded parties have executed this instrument under the several seals on the date indicated above, the name and corporate seal of each corporate party being hereto affixed, and these presents duly signed by its undersigned representative, pursuant to authority of its governing body.

PWC2627014 - TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

Executed in _____ counterparts.

Witness:

CONTRACTOR:

(Proprietorship of Partnership)

(Trade or Corporate Name)

By:

By:

Title:

Title:

(Corporate Secretary or
Assistant Secretary, Only)

(Owner, Partner, Corporate President or
Vice-President, Only)
(CORPORATE SEAL)

Witness:

SURETY COMPANY:

(Surety Company Name)

By:

Countersigned:

Title:

(N.C. Licensed Resident Agent)

(Attorney in Fact)
(SURETY CORPORATE SEAL)

**POWER OF ATTORNEY
(ATTACH)**

CERTIFICATE(S) OF INSURANCE
(Attach)

NOTICE TO PROCEED

TO: _____

Date: _____

PROJECT: PWC2627014 - TRANSMISSION STEEL POLE REPLACEMENT FOR TOM STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

You are hereby notified to commence work in accordance with the Contract dated _____, 2026, on or before _____, 2026, and you are to complete the WORK within the **contract period** thereafter. The date of final completion therefore is _____.

FAYETTEVILLE PUBLIC WORKS COMMISSION

BY: _____

Nikole Bohannon

Procurement Manager

ACCEPTANCE OF NOTICE

Receipt of the above NOTICE TO PROCEED

is hereby acknowledged this the _____ day of _____, 2026.

(CONTRACTOR)

BY: _____

TITLE: _____

- END OF SECTION -

PWC2627014 - TRANSMISSION STEEL POLE REPLACEMENTS FOR TOM STARLING, BRAGG BOULEVARD, TESS-DUNN ROAD, MCARTHUR ROAD, AND RIVER ROAD

***** THIS PAGE WAS INTENTIONALLY LEFT BLANK *****

SECTION C – TECHNICAL SPECIFICATIONS

SCOPE OF WORK, SCHEDULE, AND MAPS

ATTACHMENT A:

SCOPE OF WORK

TOM STARLING TRANSMISSION PROJECT

Project Overview


This project is for the replacement of 102 wood poles to steel poles along Tom Starling Road from NC-87 to I-95 BUS. This pole line consists of 69kV sub-transmission with a 15kV underbuilt distribution line as well as PWC owned Fiber and Joint Use communications. This project will require the removal of existing PWC hardware to include pulling the pole, installing a new steel pole with new hardware, transferring the existing 69kV and 15kV conductor, transferring capacitor banks, transferring underground dips, transferring PWC fiber, and transferring joint-use communications.

Schedule


This project is expected to be completed in a 6-month period once PWC releases the project. This project will be worked on an NCDOT encroachment.

TOM STARLING TRANSMISSION PROJECT

1:600

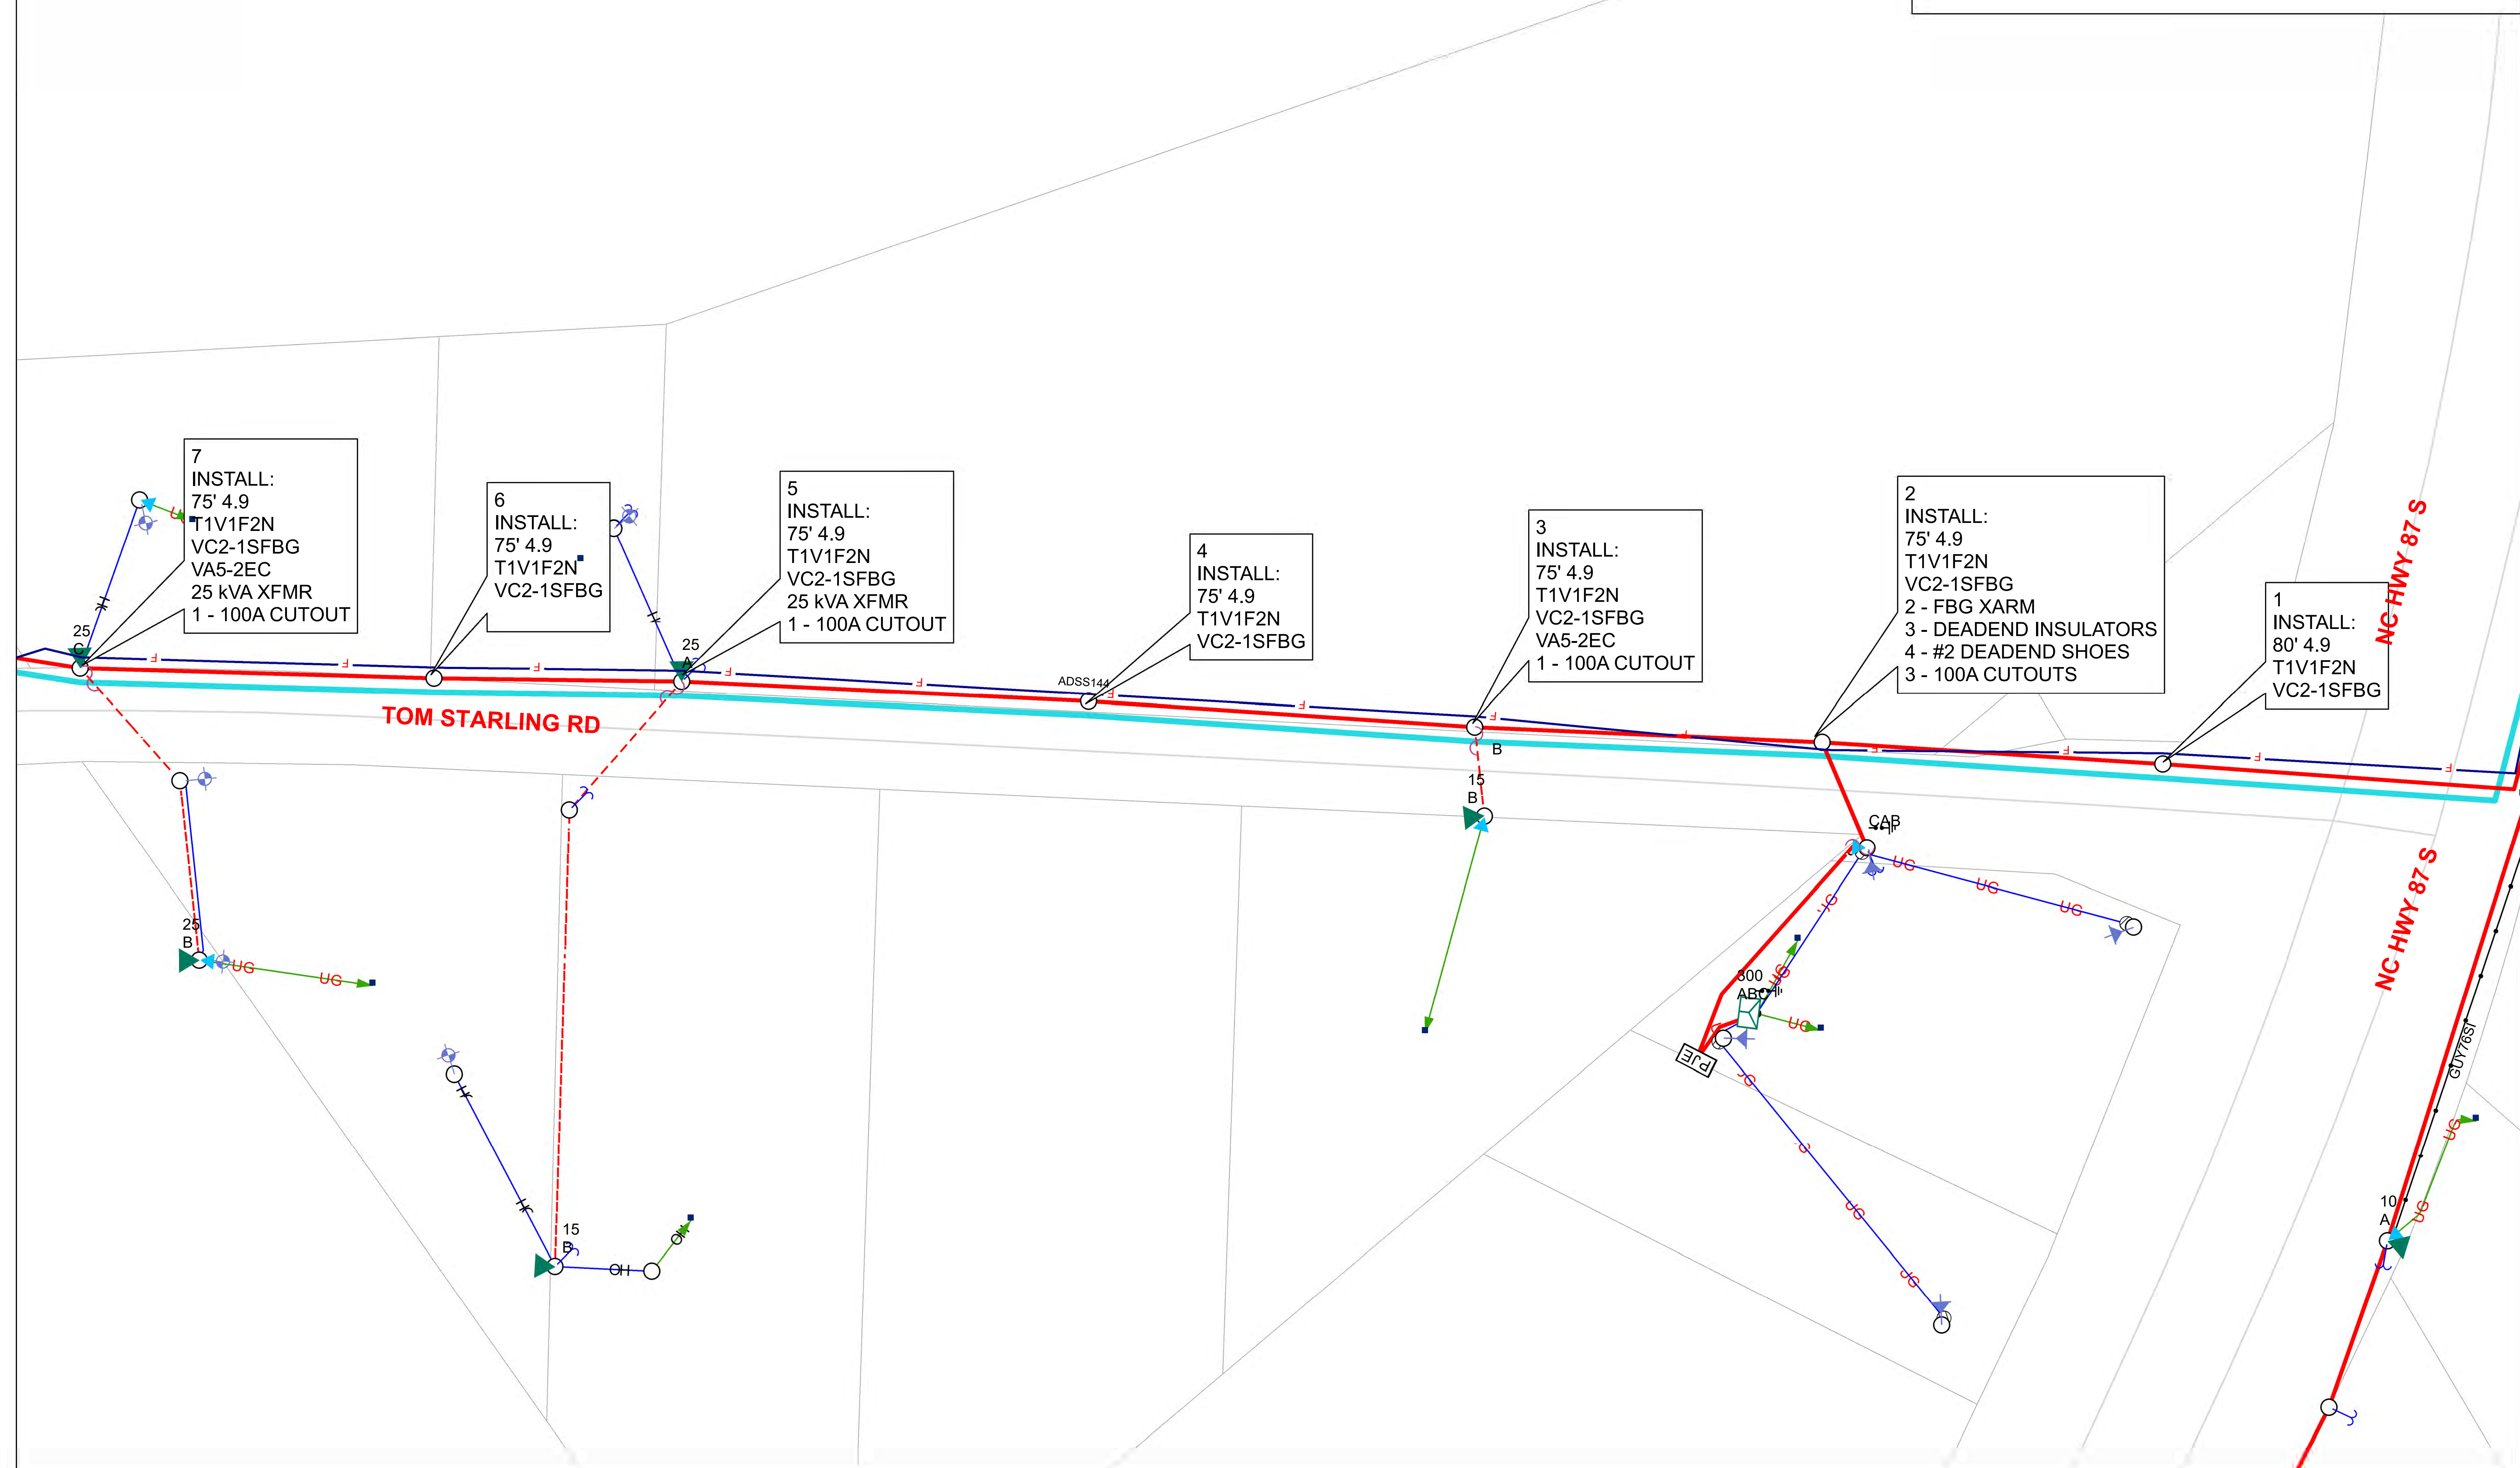

1:600

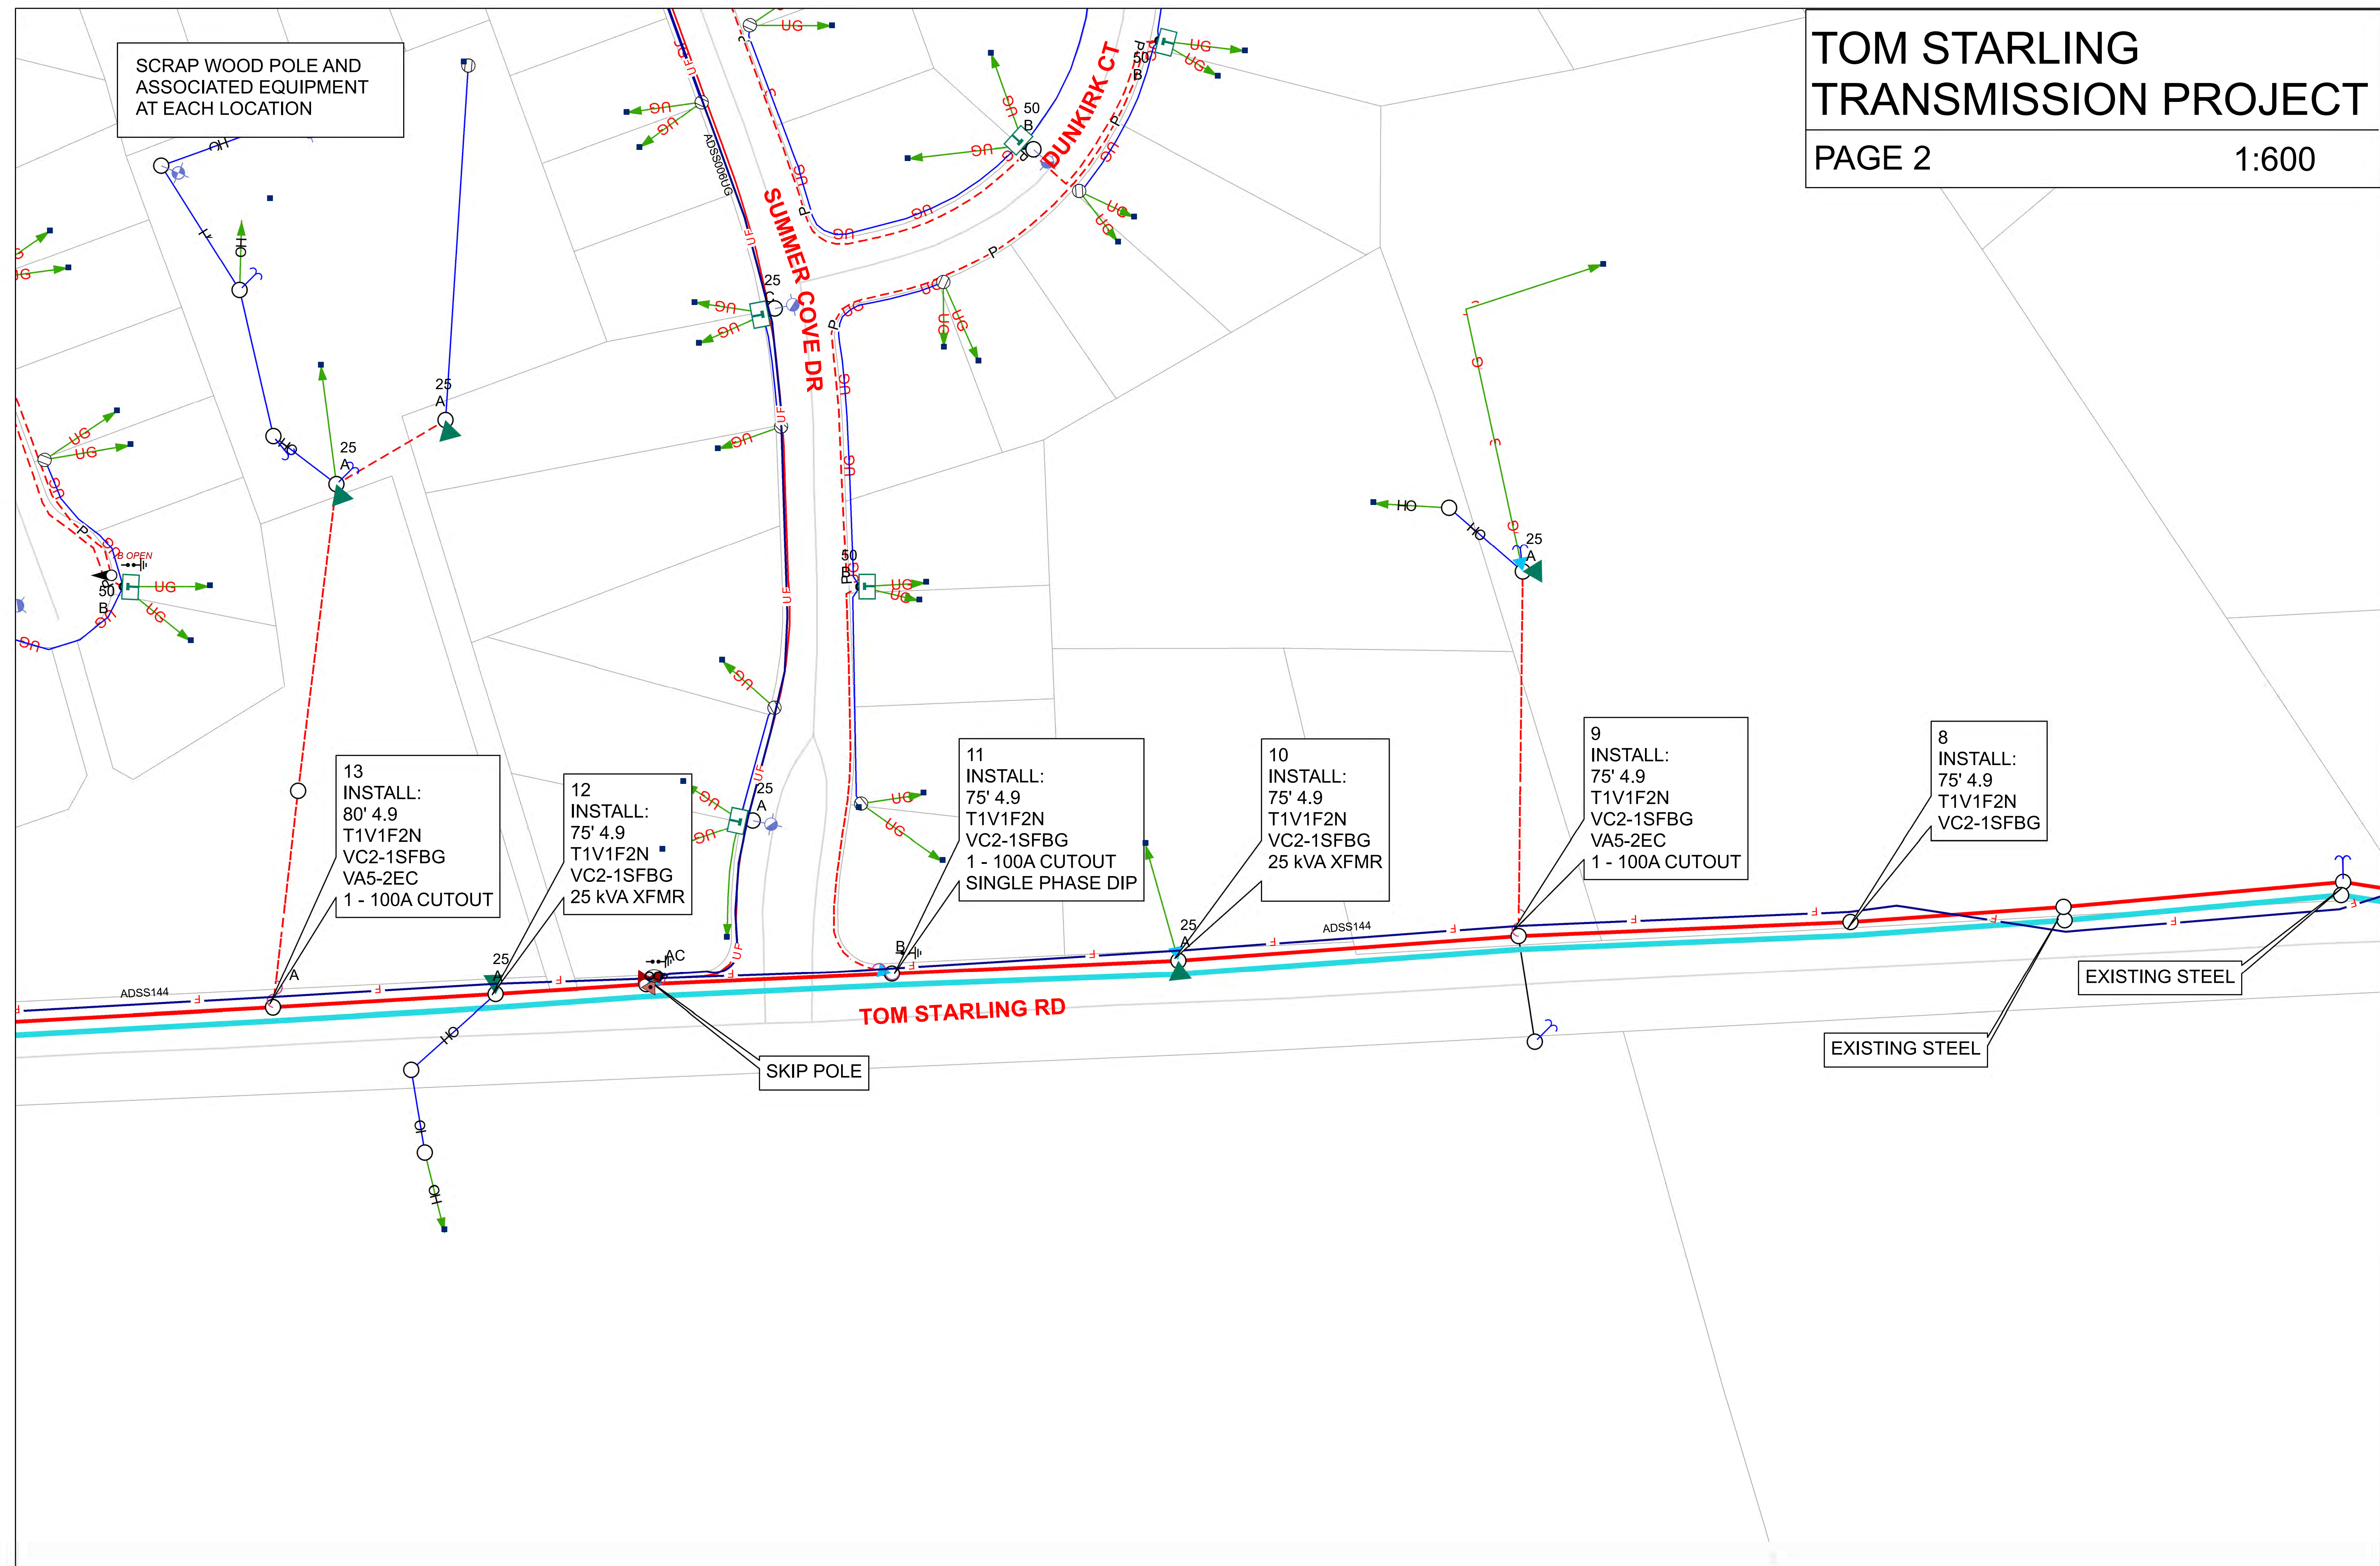


SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

TOM STARLING
TRANSMISSION PROJECT

PAGE 3

1:600

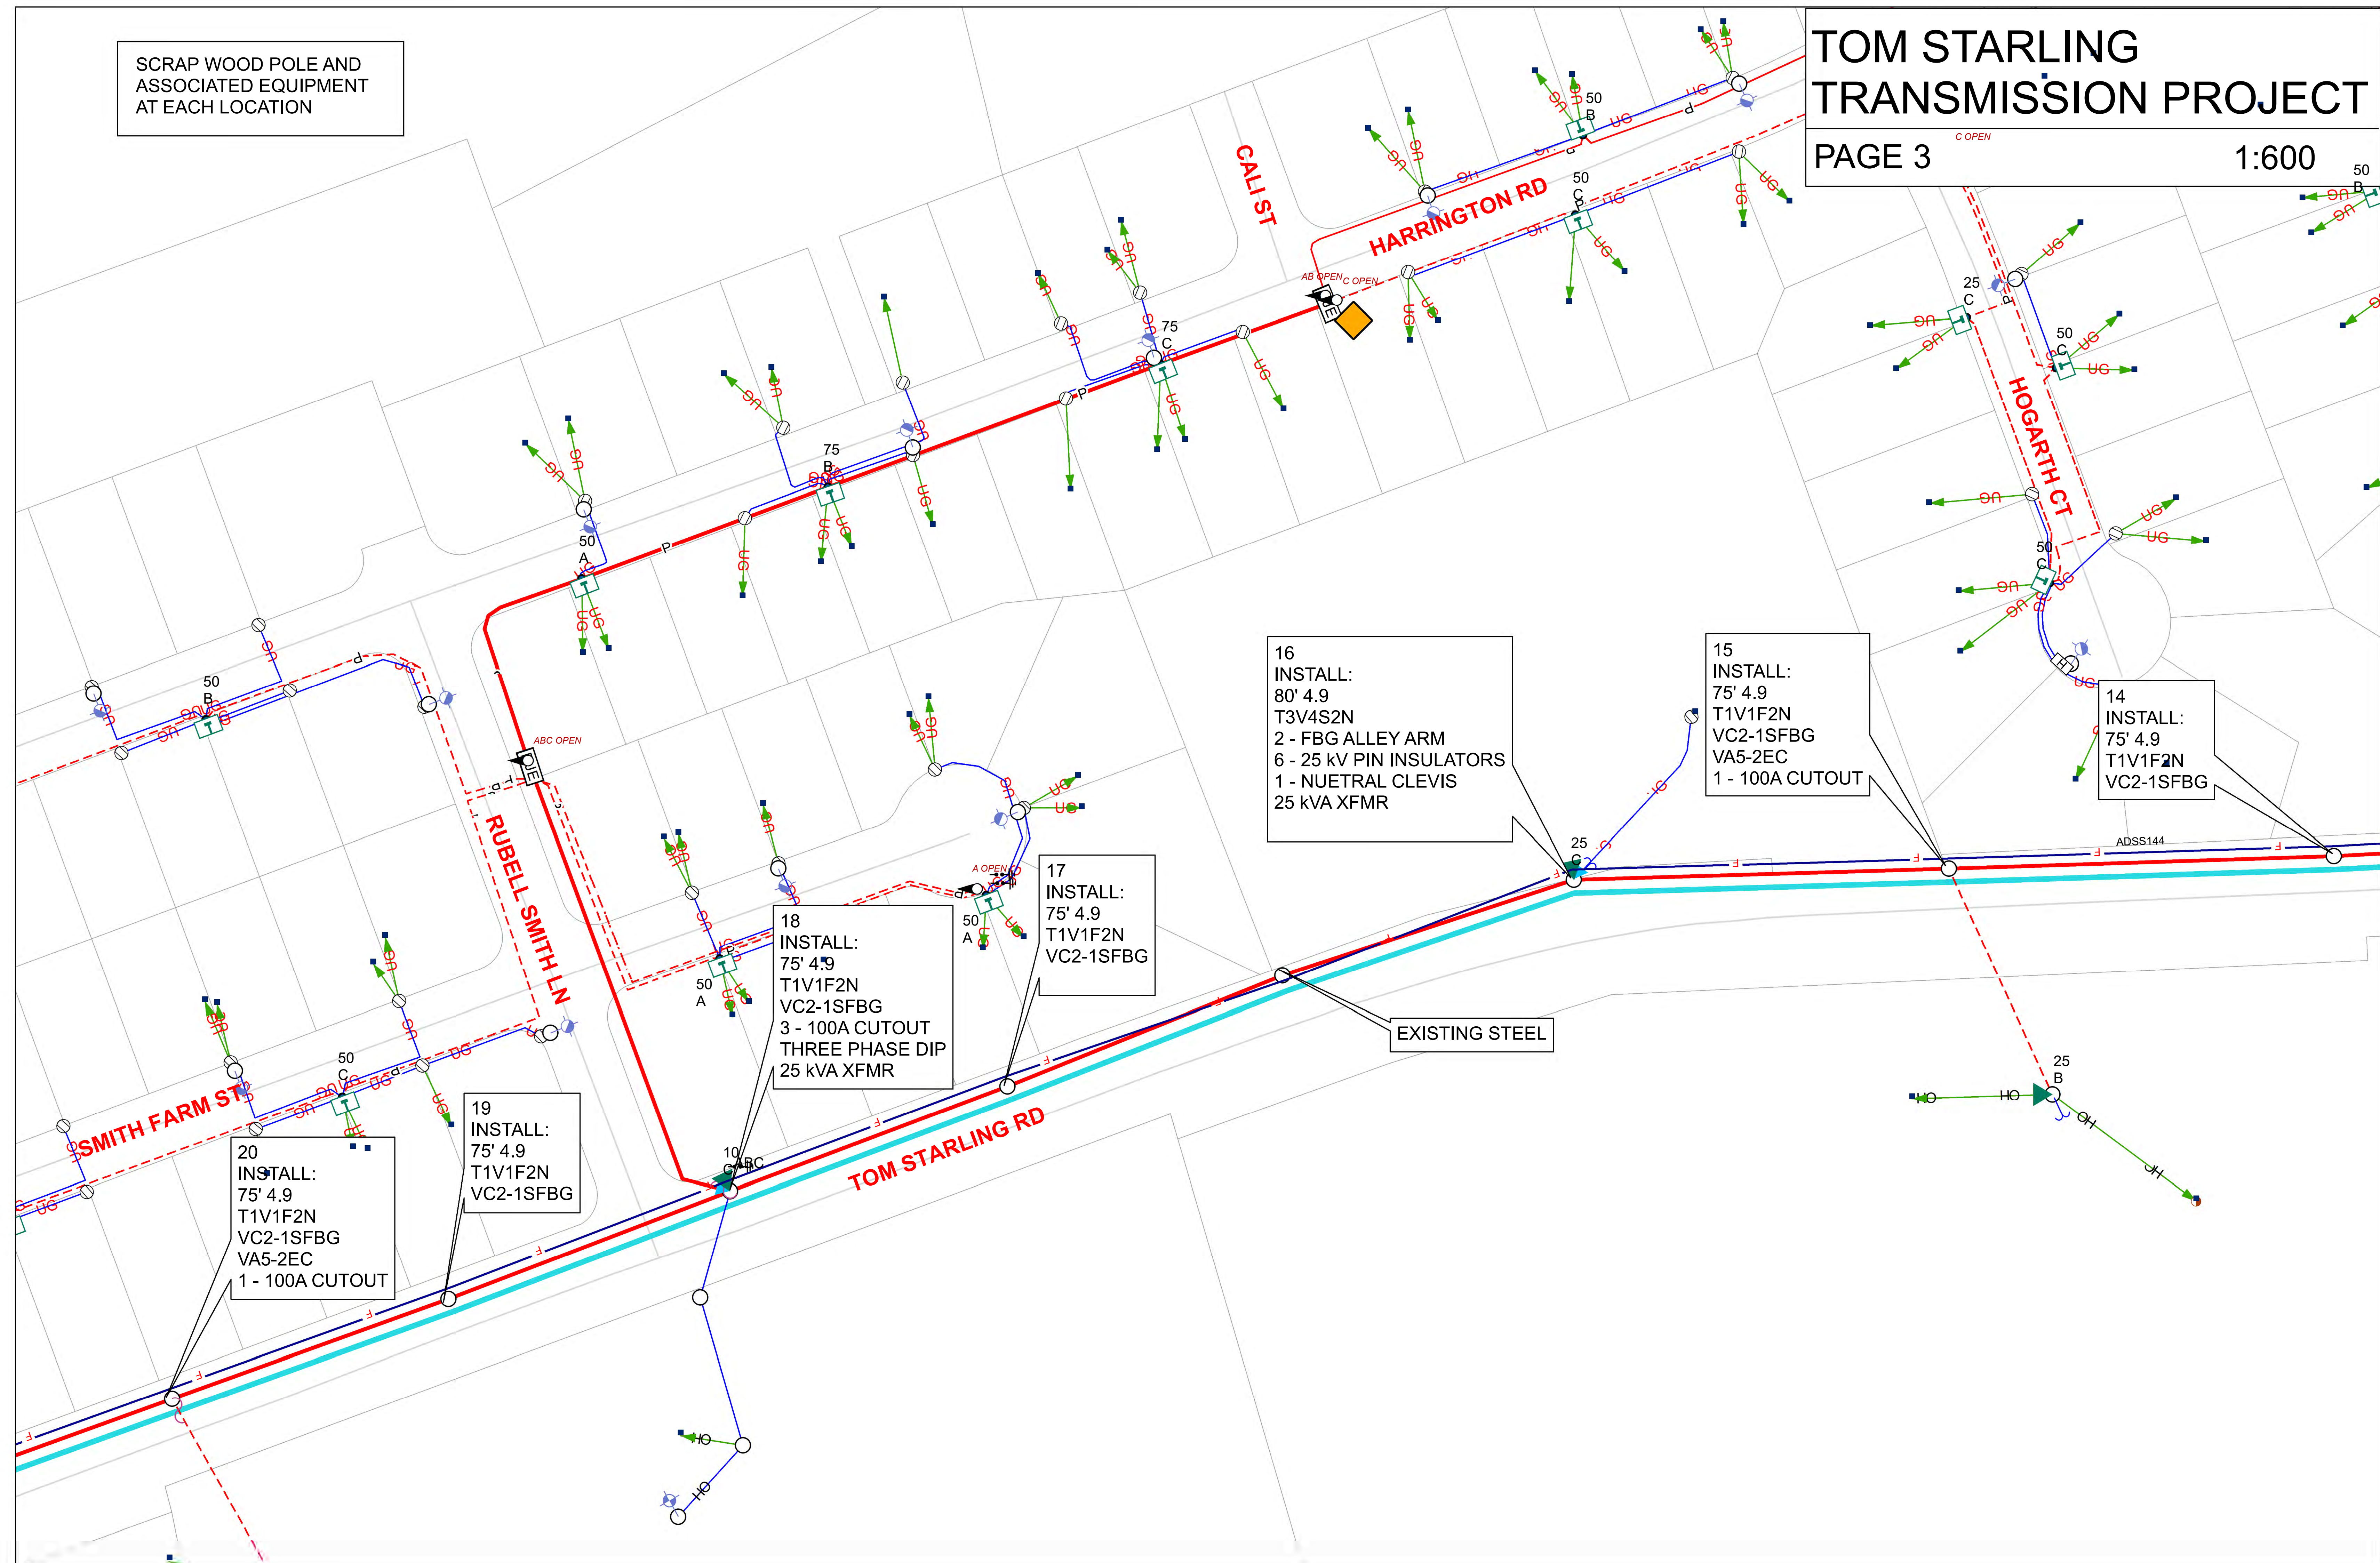

50

~~C OPEN~~

27
INSTALL:
75' 4.9
T2V1S4N
2 - FBG ALLEY ARMS
6 - 25 kV PIN INSULATORS
1 - NUETRAL CLEVIS
VA5-2EC
1 - 100A CUTOUT
10 kVA XFMR

26
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG
VA5-2EC
1 - 100A CUTOUT
10 kVA XFMR

25
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG

24
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG
VA5-2EC
1 - 100A CUTOUT
25 kVA XFMR


23
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG

22
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG
VA5-2EC
1 - 100A CUTOUT

21
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG

TOM STARLING RD

28
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG
■
TRANSFER:
CAP BANK

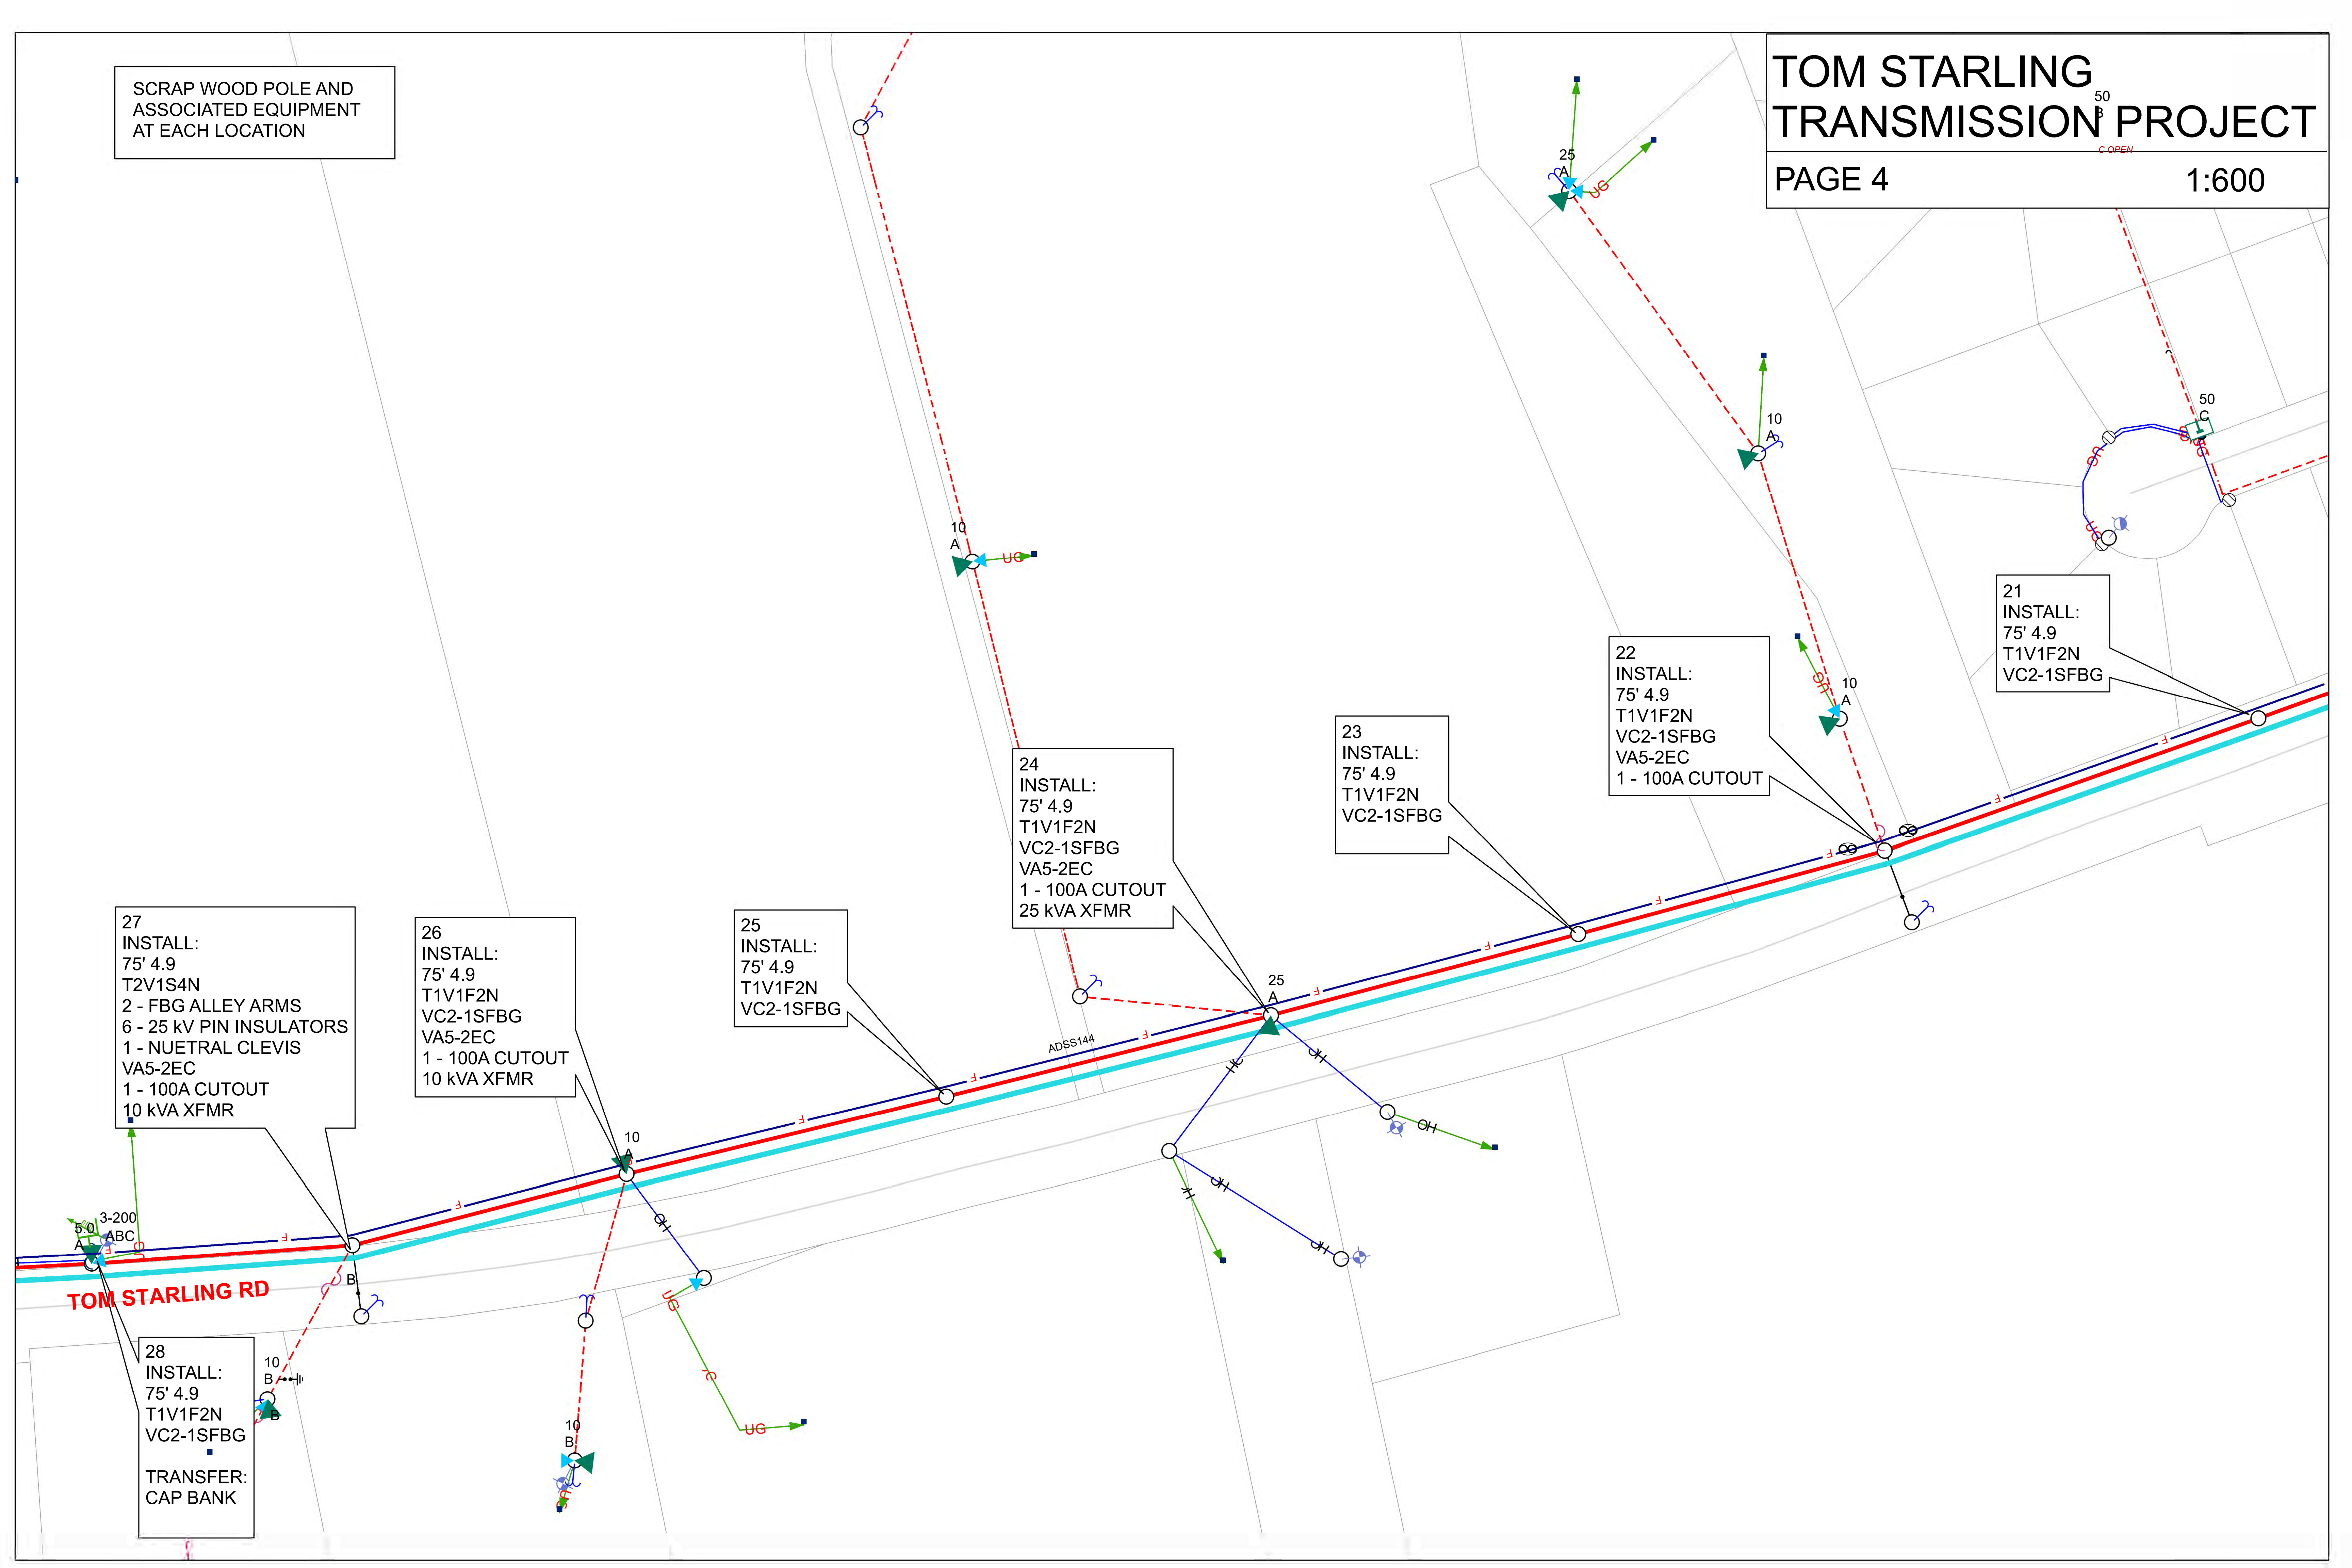

TOM STARLING TRANSMISSION PROJECT

PAGE 5

1:600

SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

SCALES CT

CHARGER CT

MOTTRAM CT

TWINLEAF CT

MATCHWOOD CT

LAURELWOOD PL

LOWBRANCH CT

BACKBAY RD

TOM STARLING RD

36
INSTALL:
80' 4.9
T3V4S4N
2 - FBG ALLEY ARMS
6 - 25 kV PIN INSULATORS
1 - NUETRAL CLEVIS
50 kVA XFMR

34
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG
50 kVA XFMR

33
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG
50 kVA XFMR

32
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG
2 - FBG XARMS
3 - DEADENDS
4 - DEADEND SHOES
3 - 100A CUTOUTS


31
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG
25 kVA XFMR


30
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG
VA5-2EC
1 - 100A CUTOUT
25 kVA XFMR

29
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG
VA5-2EC
1 - 100A CUTOUT

35
INSTALL:
75' 4.9
T1V1F2N
VC2-1SFBG
1 - 100A CUTOUT
1 PHASE DIP

SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

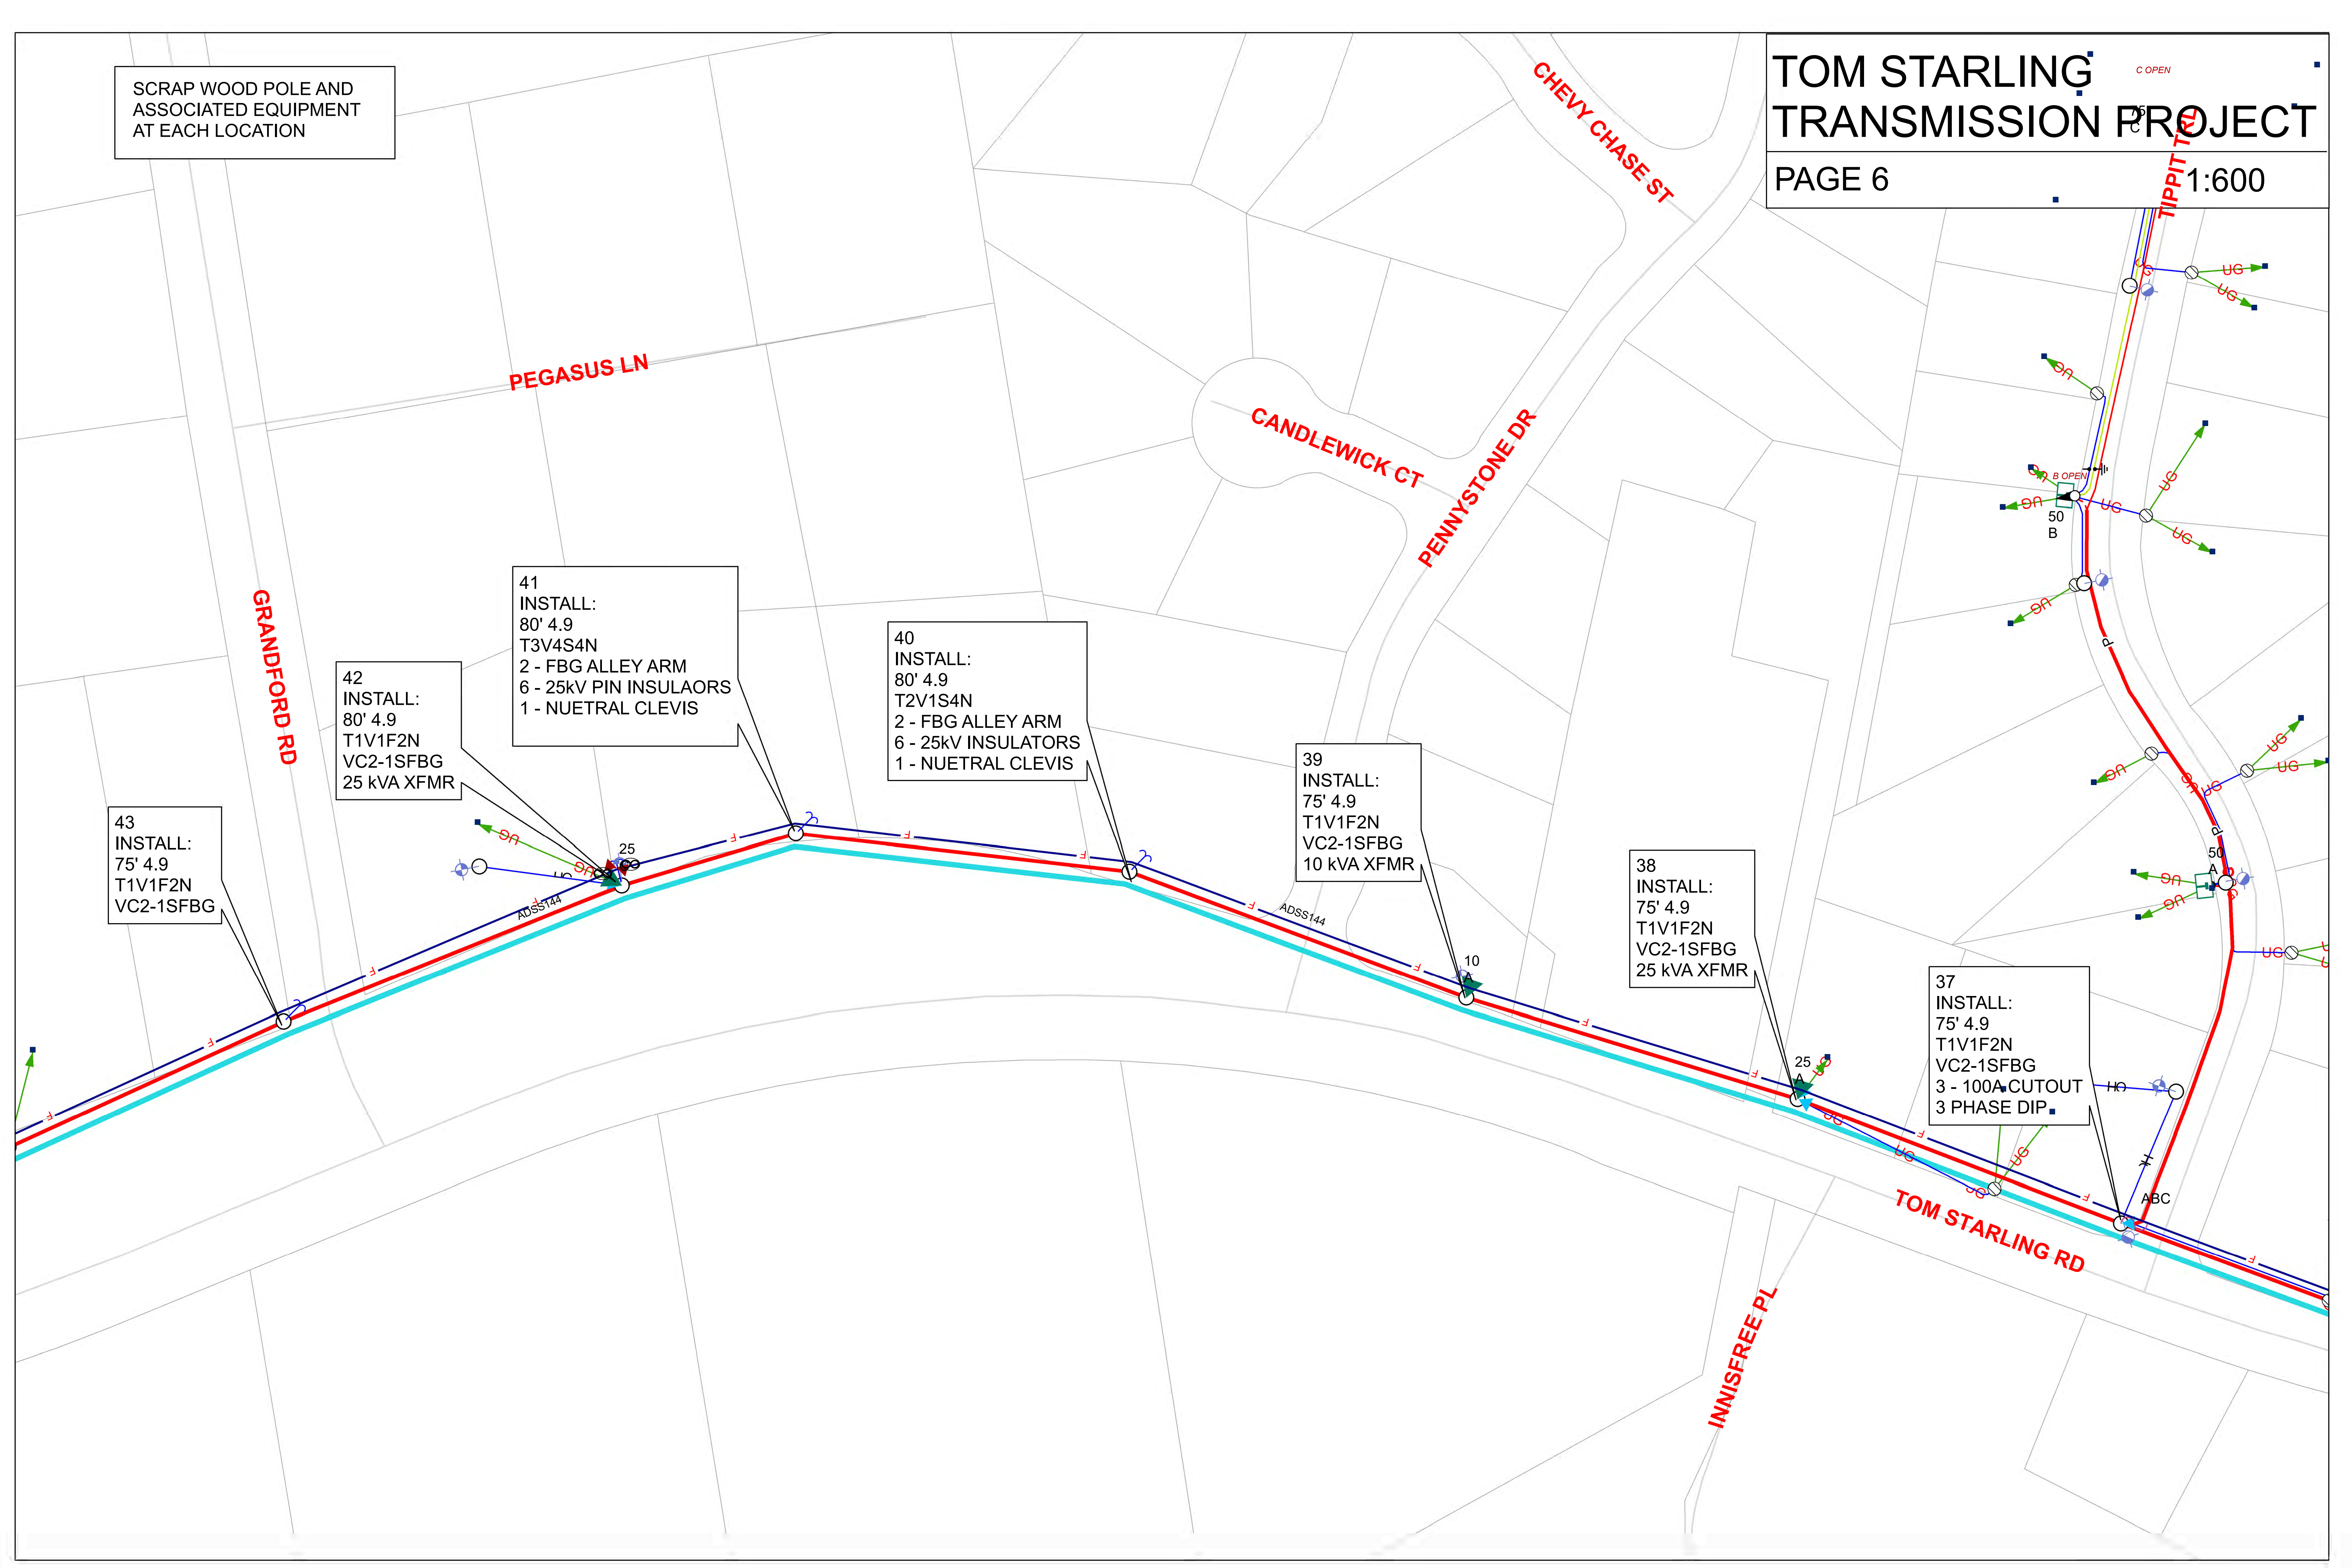


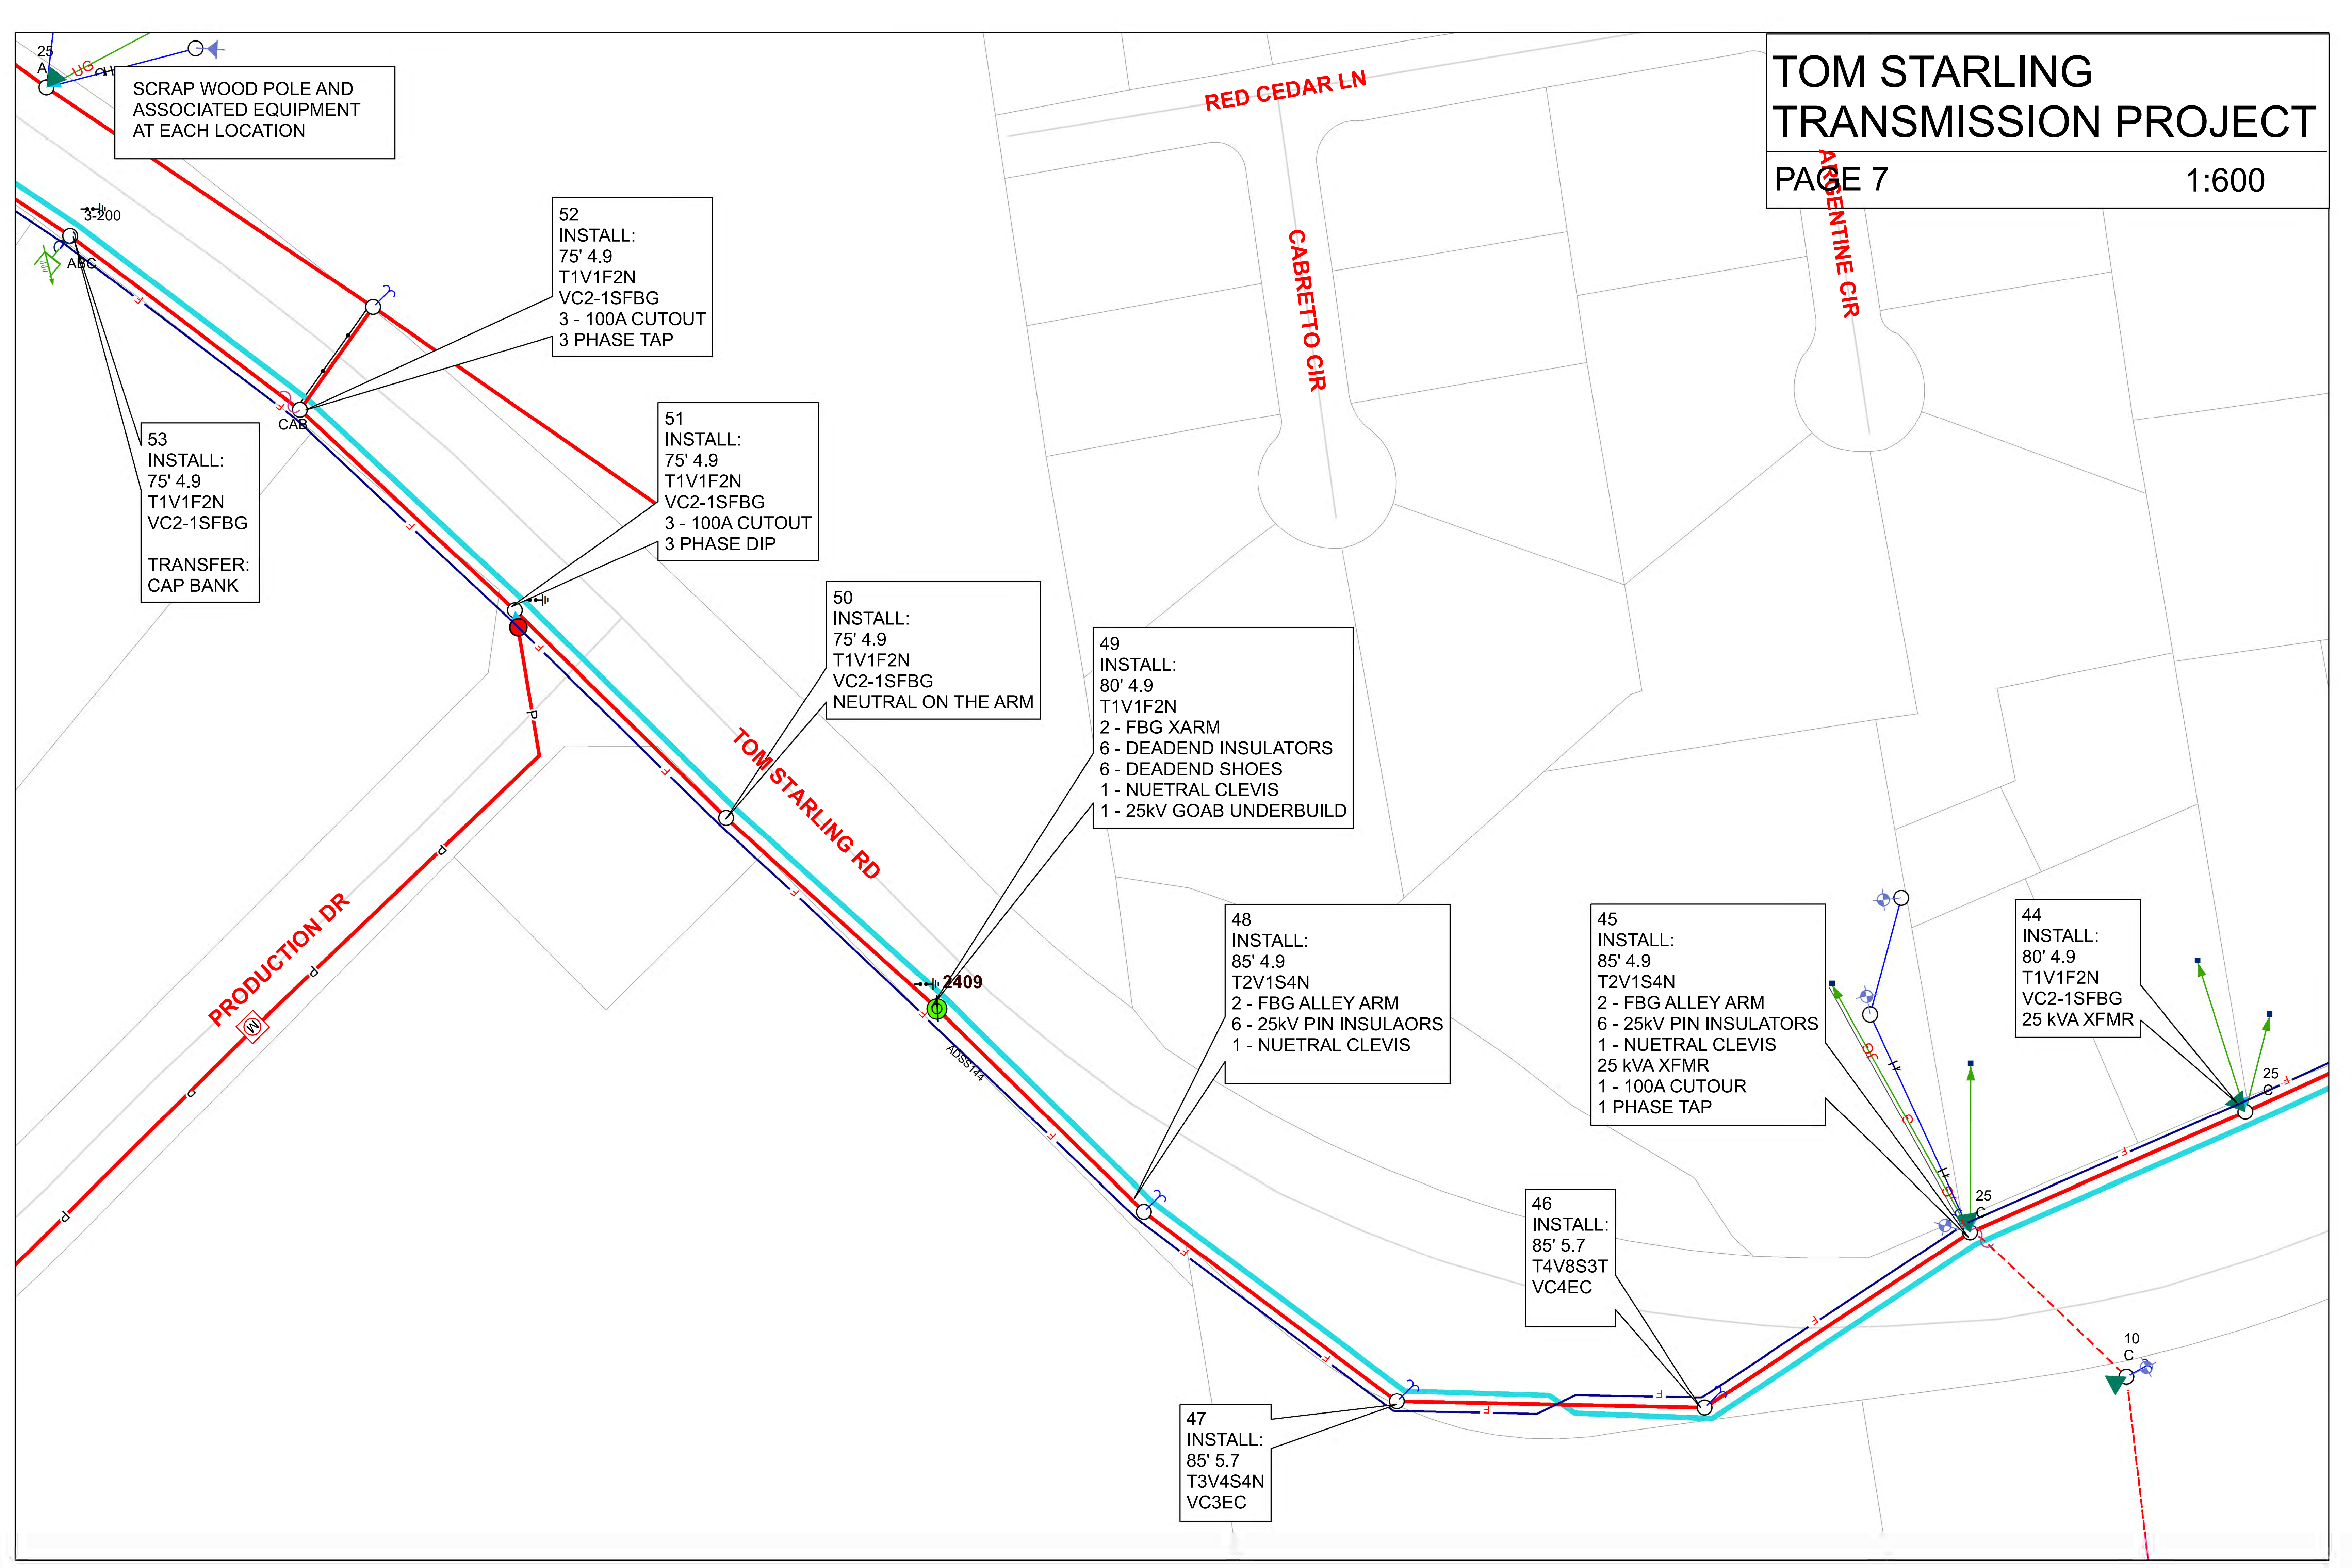



200
S
ALC

PAGE 8


1:600

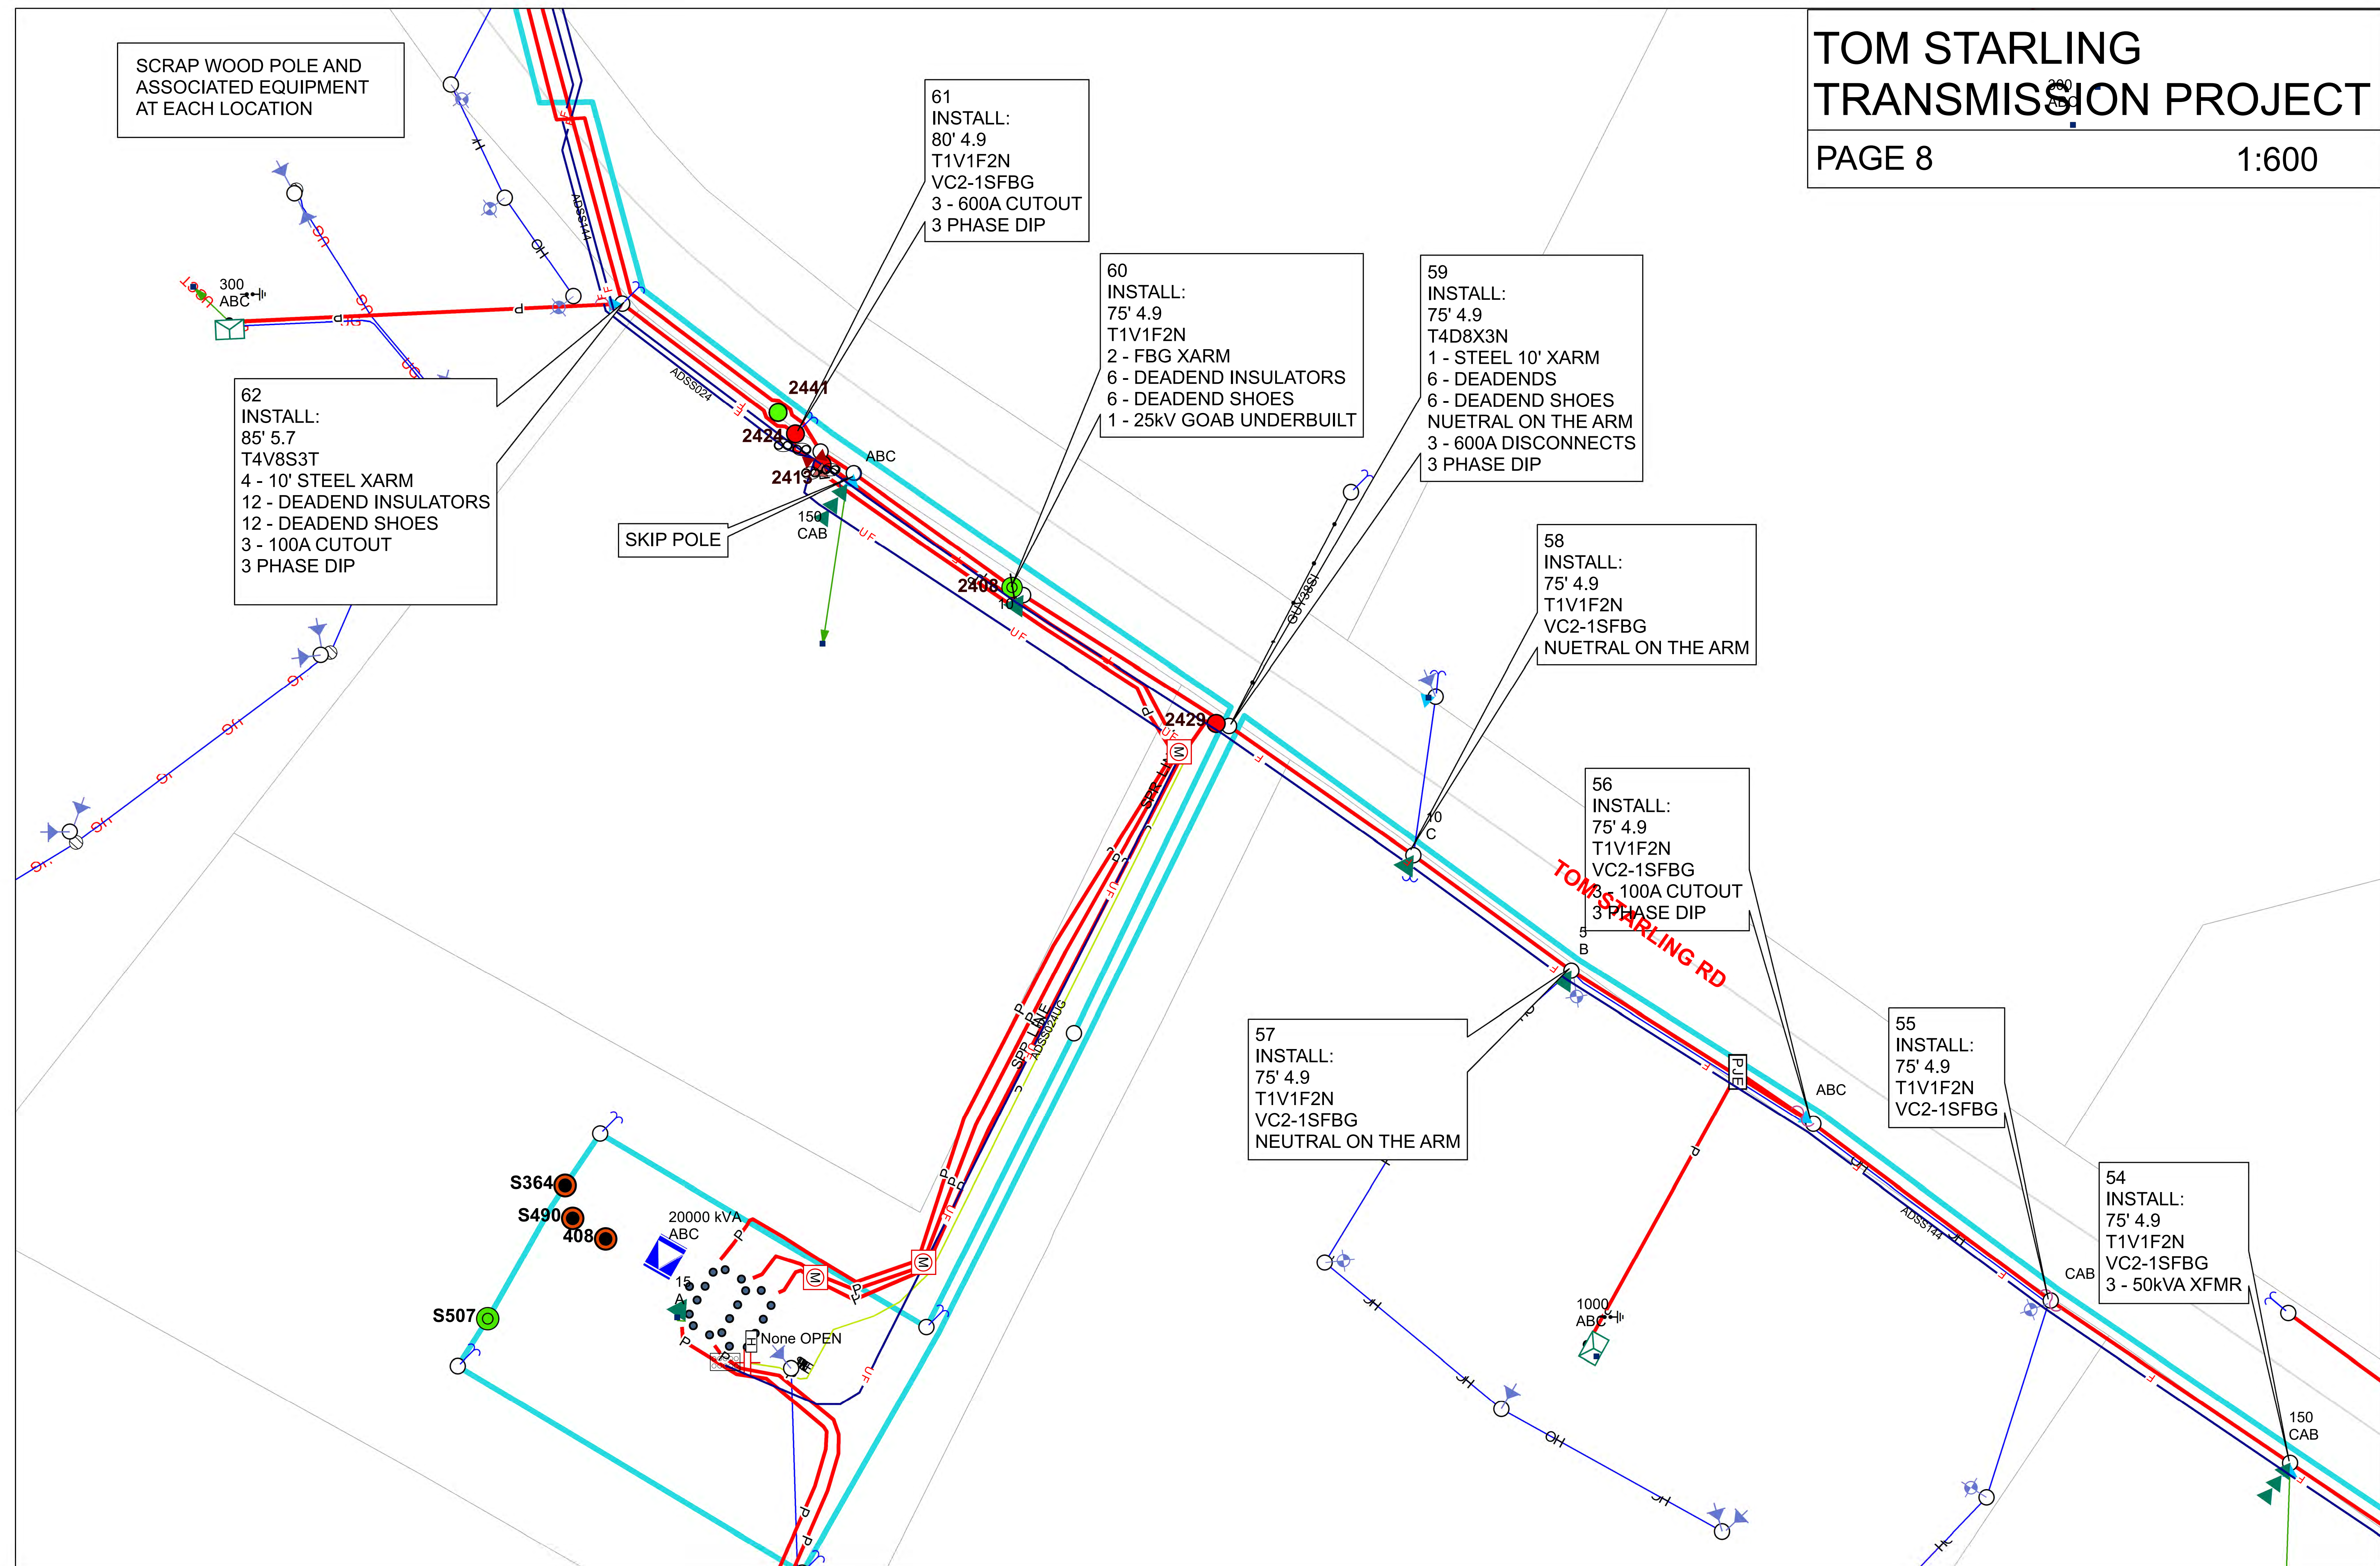

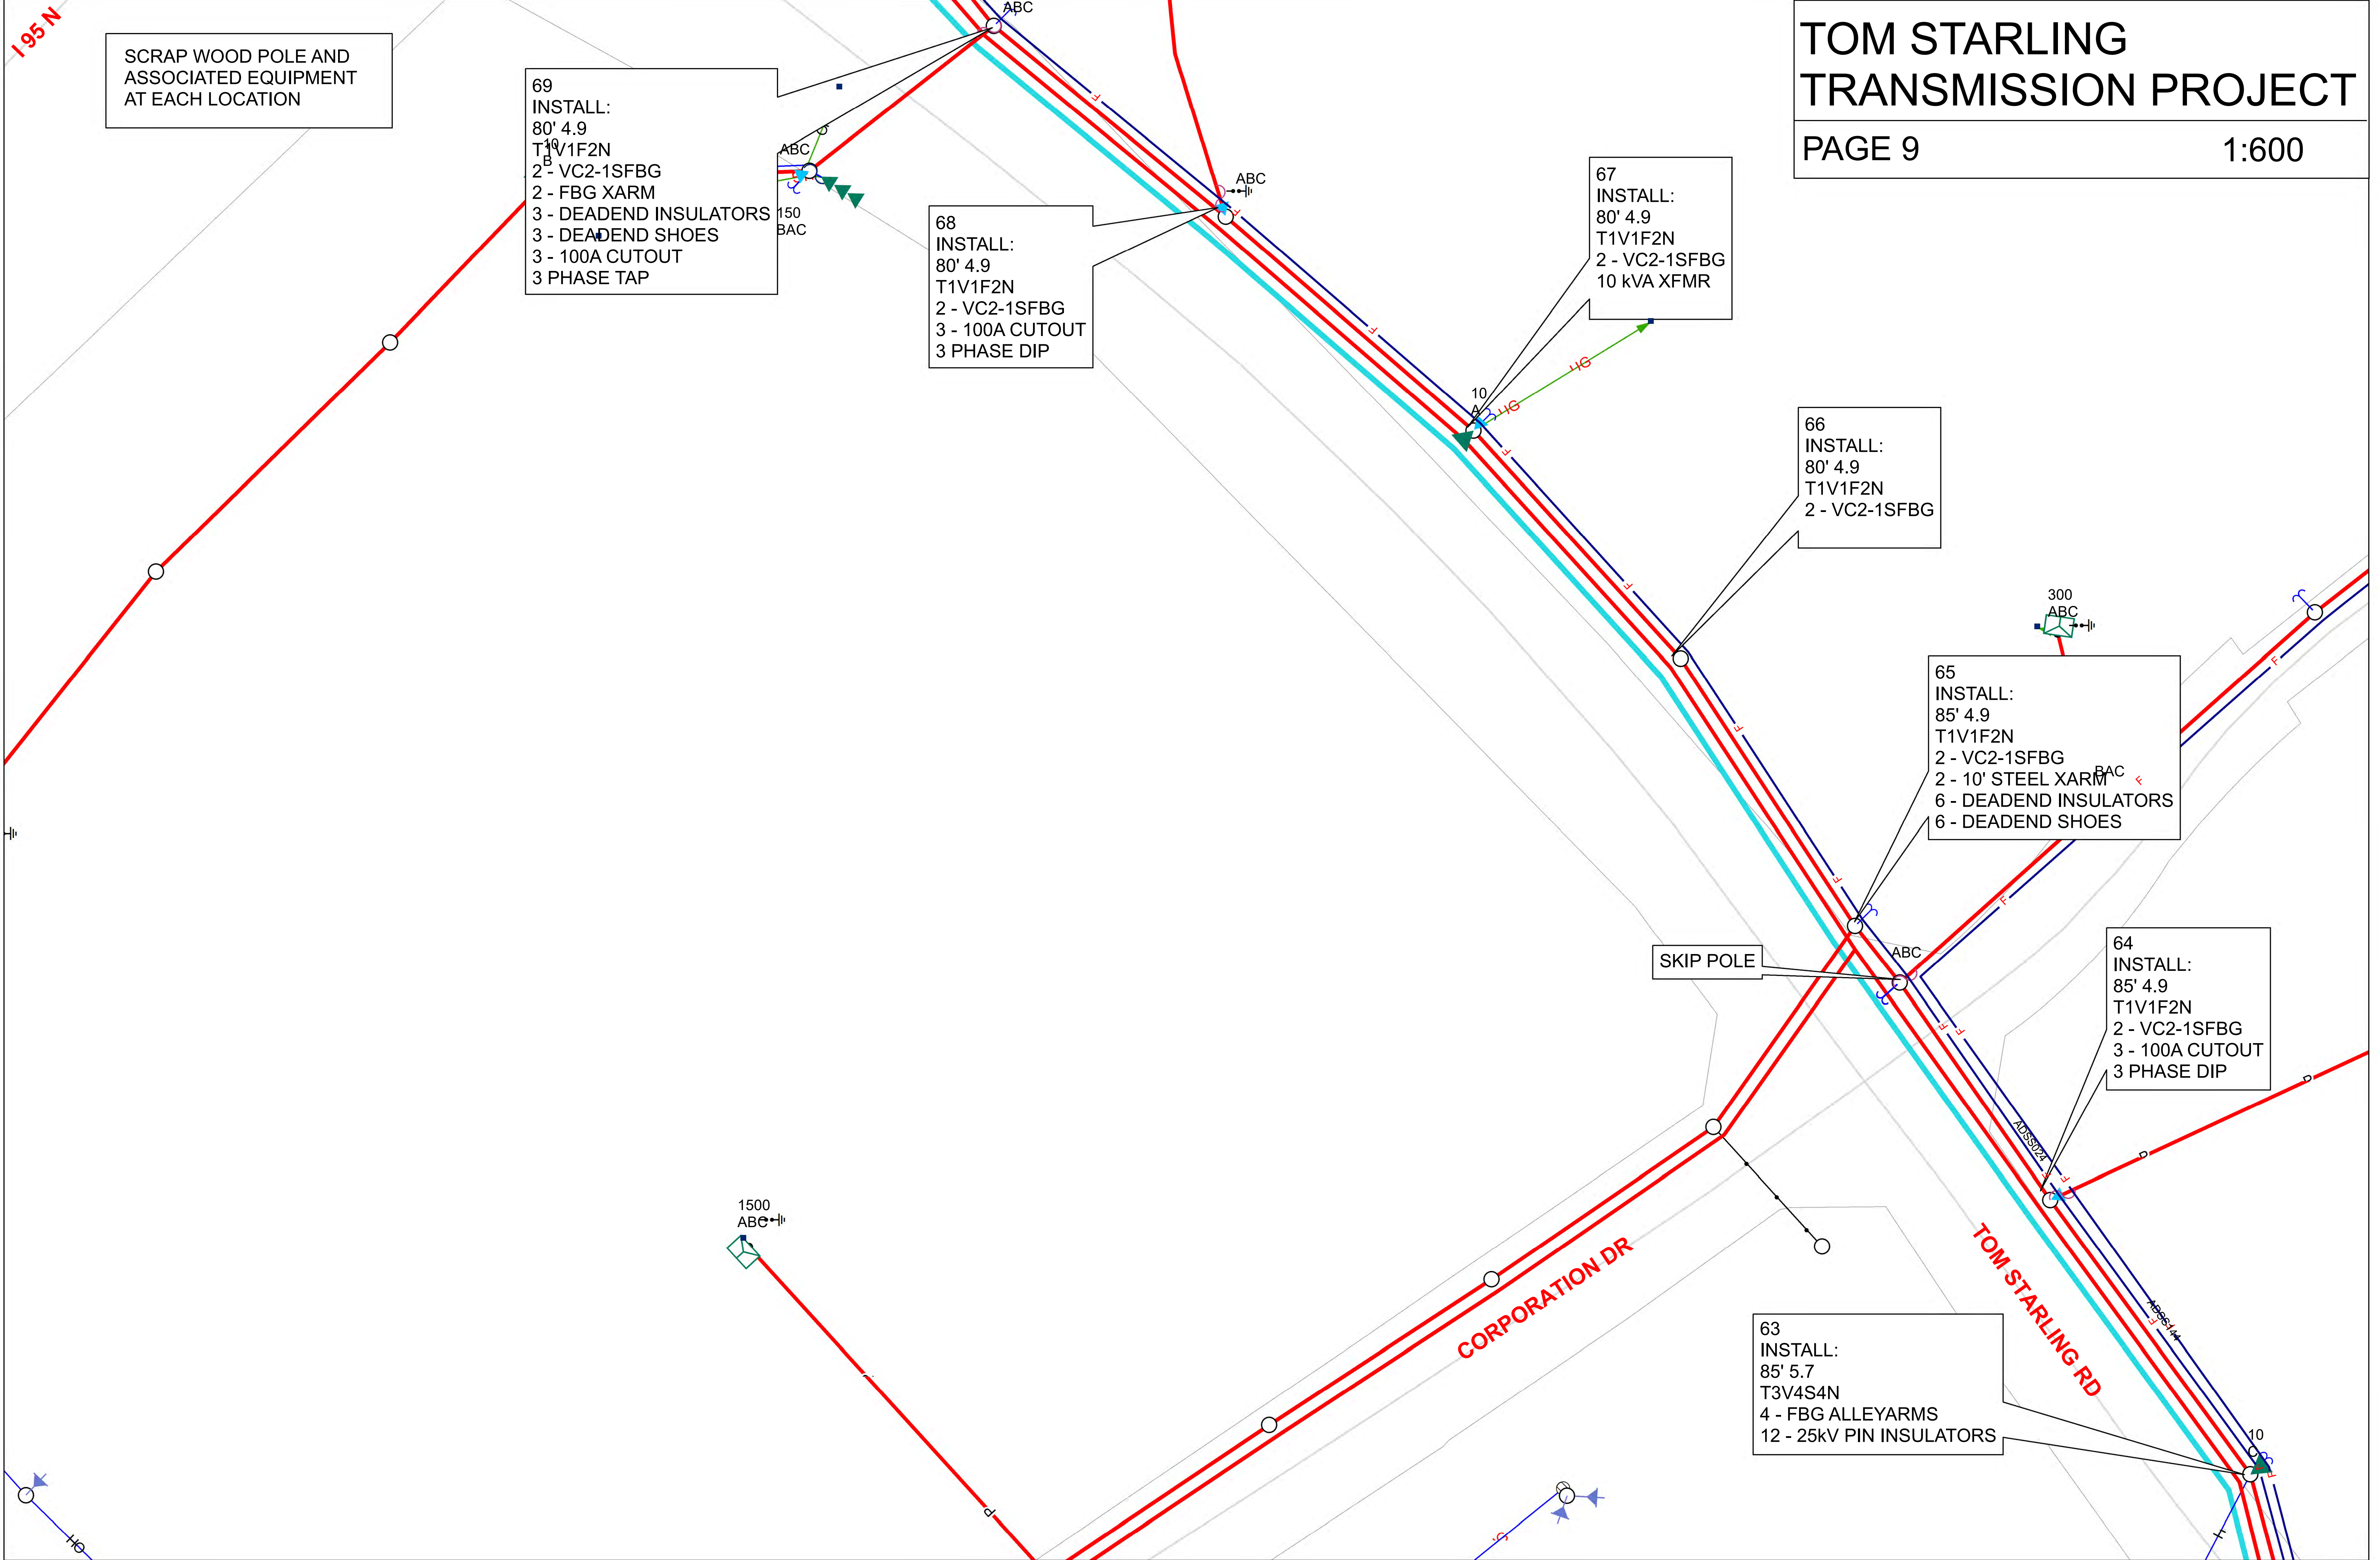


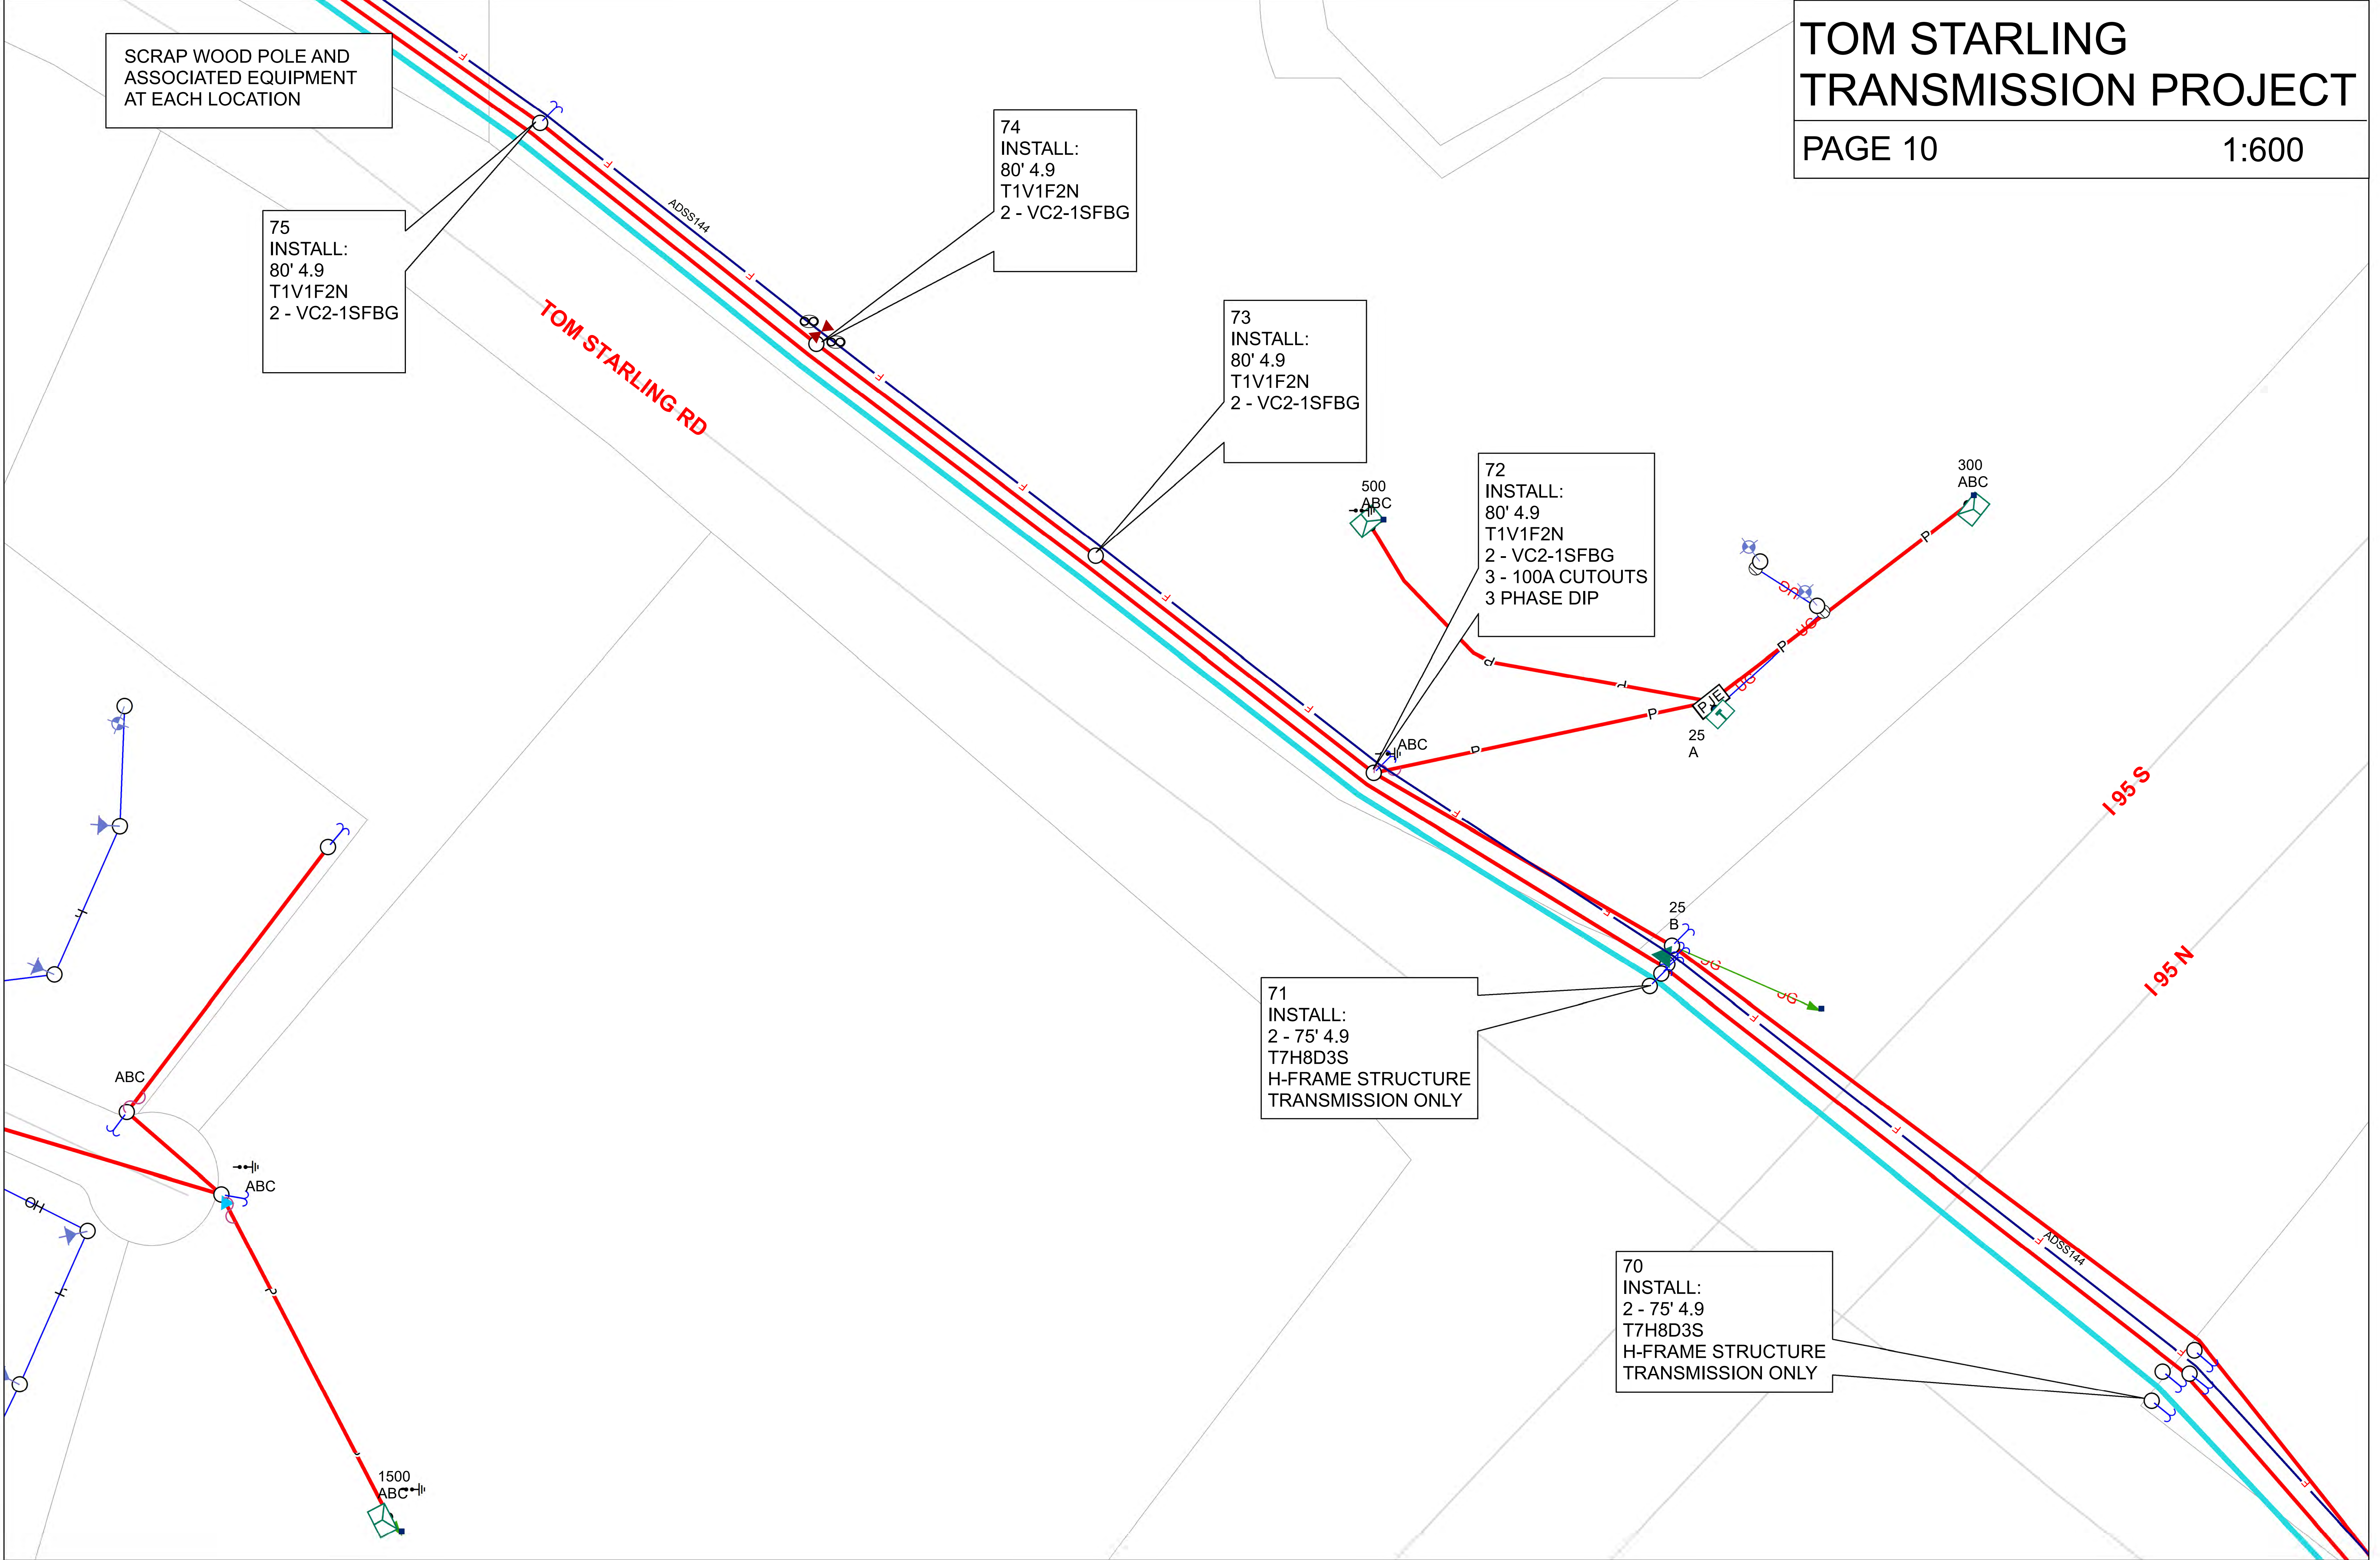

SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

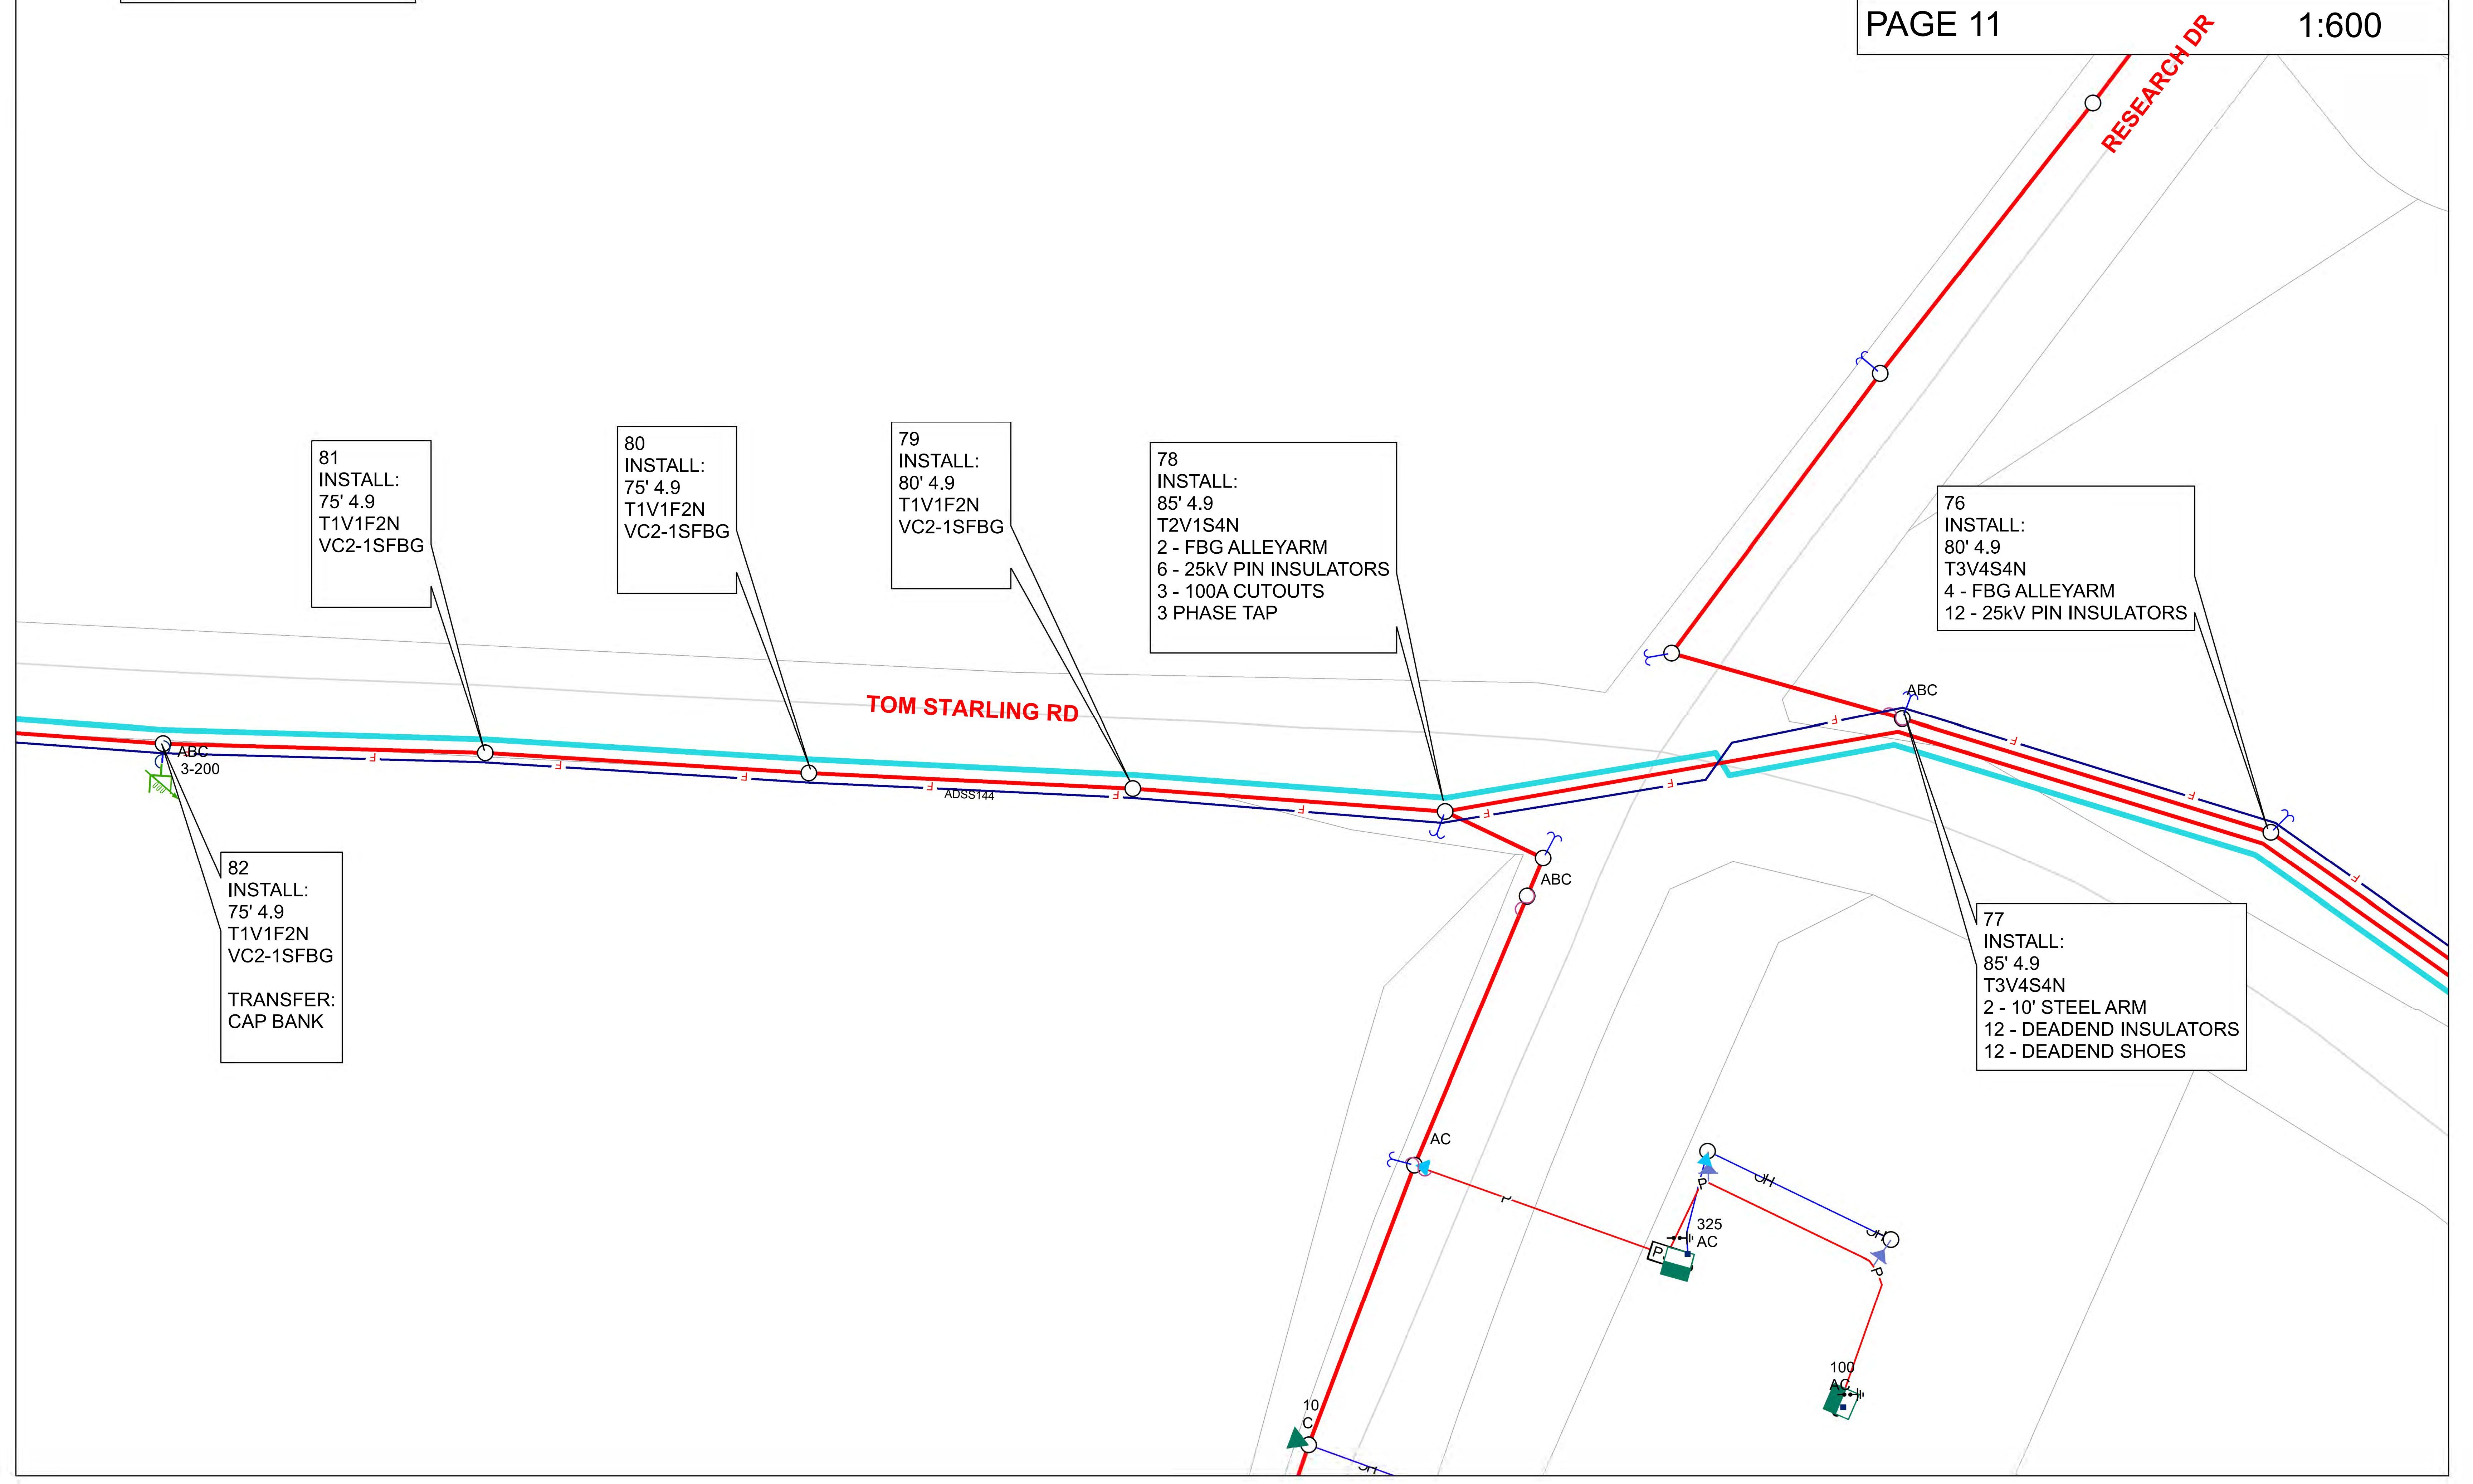

SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

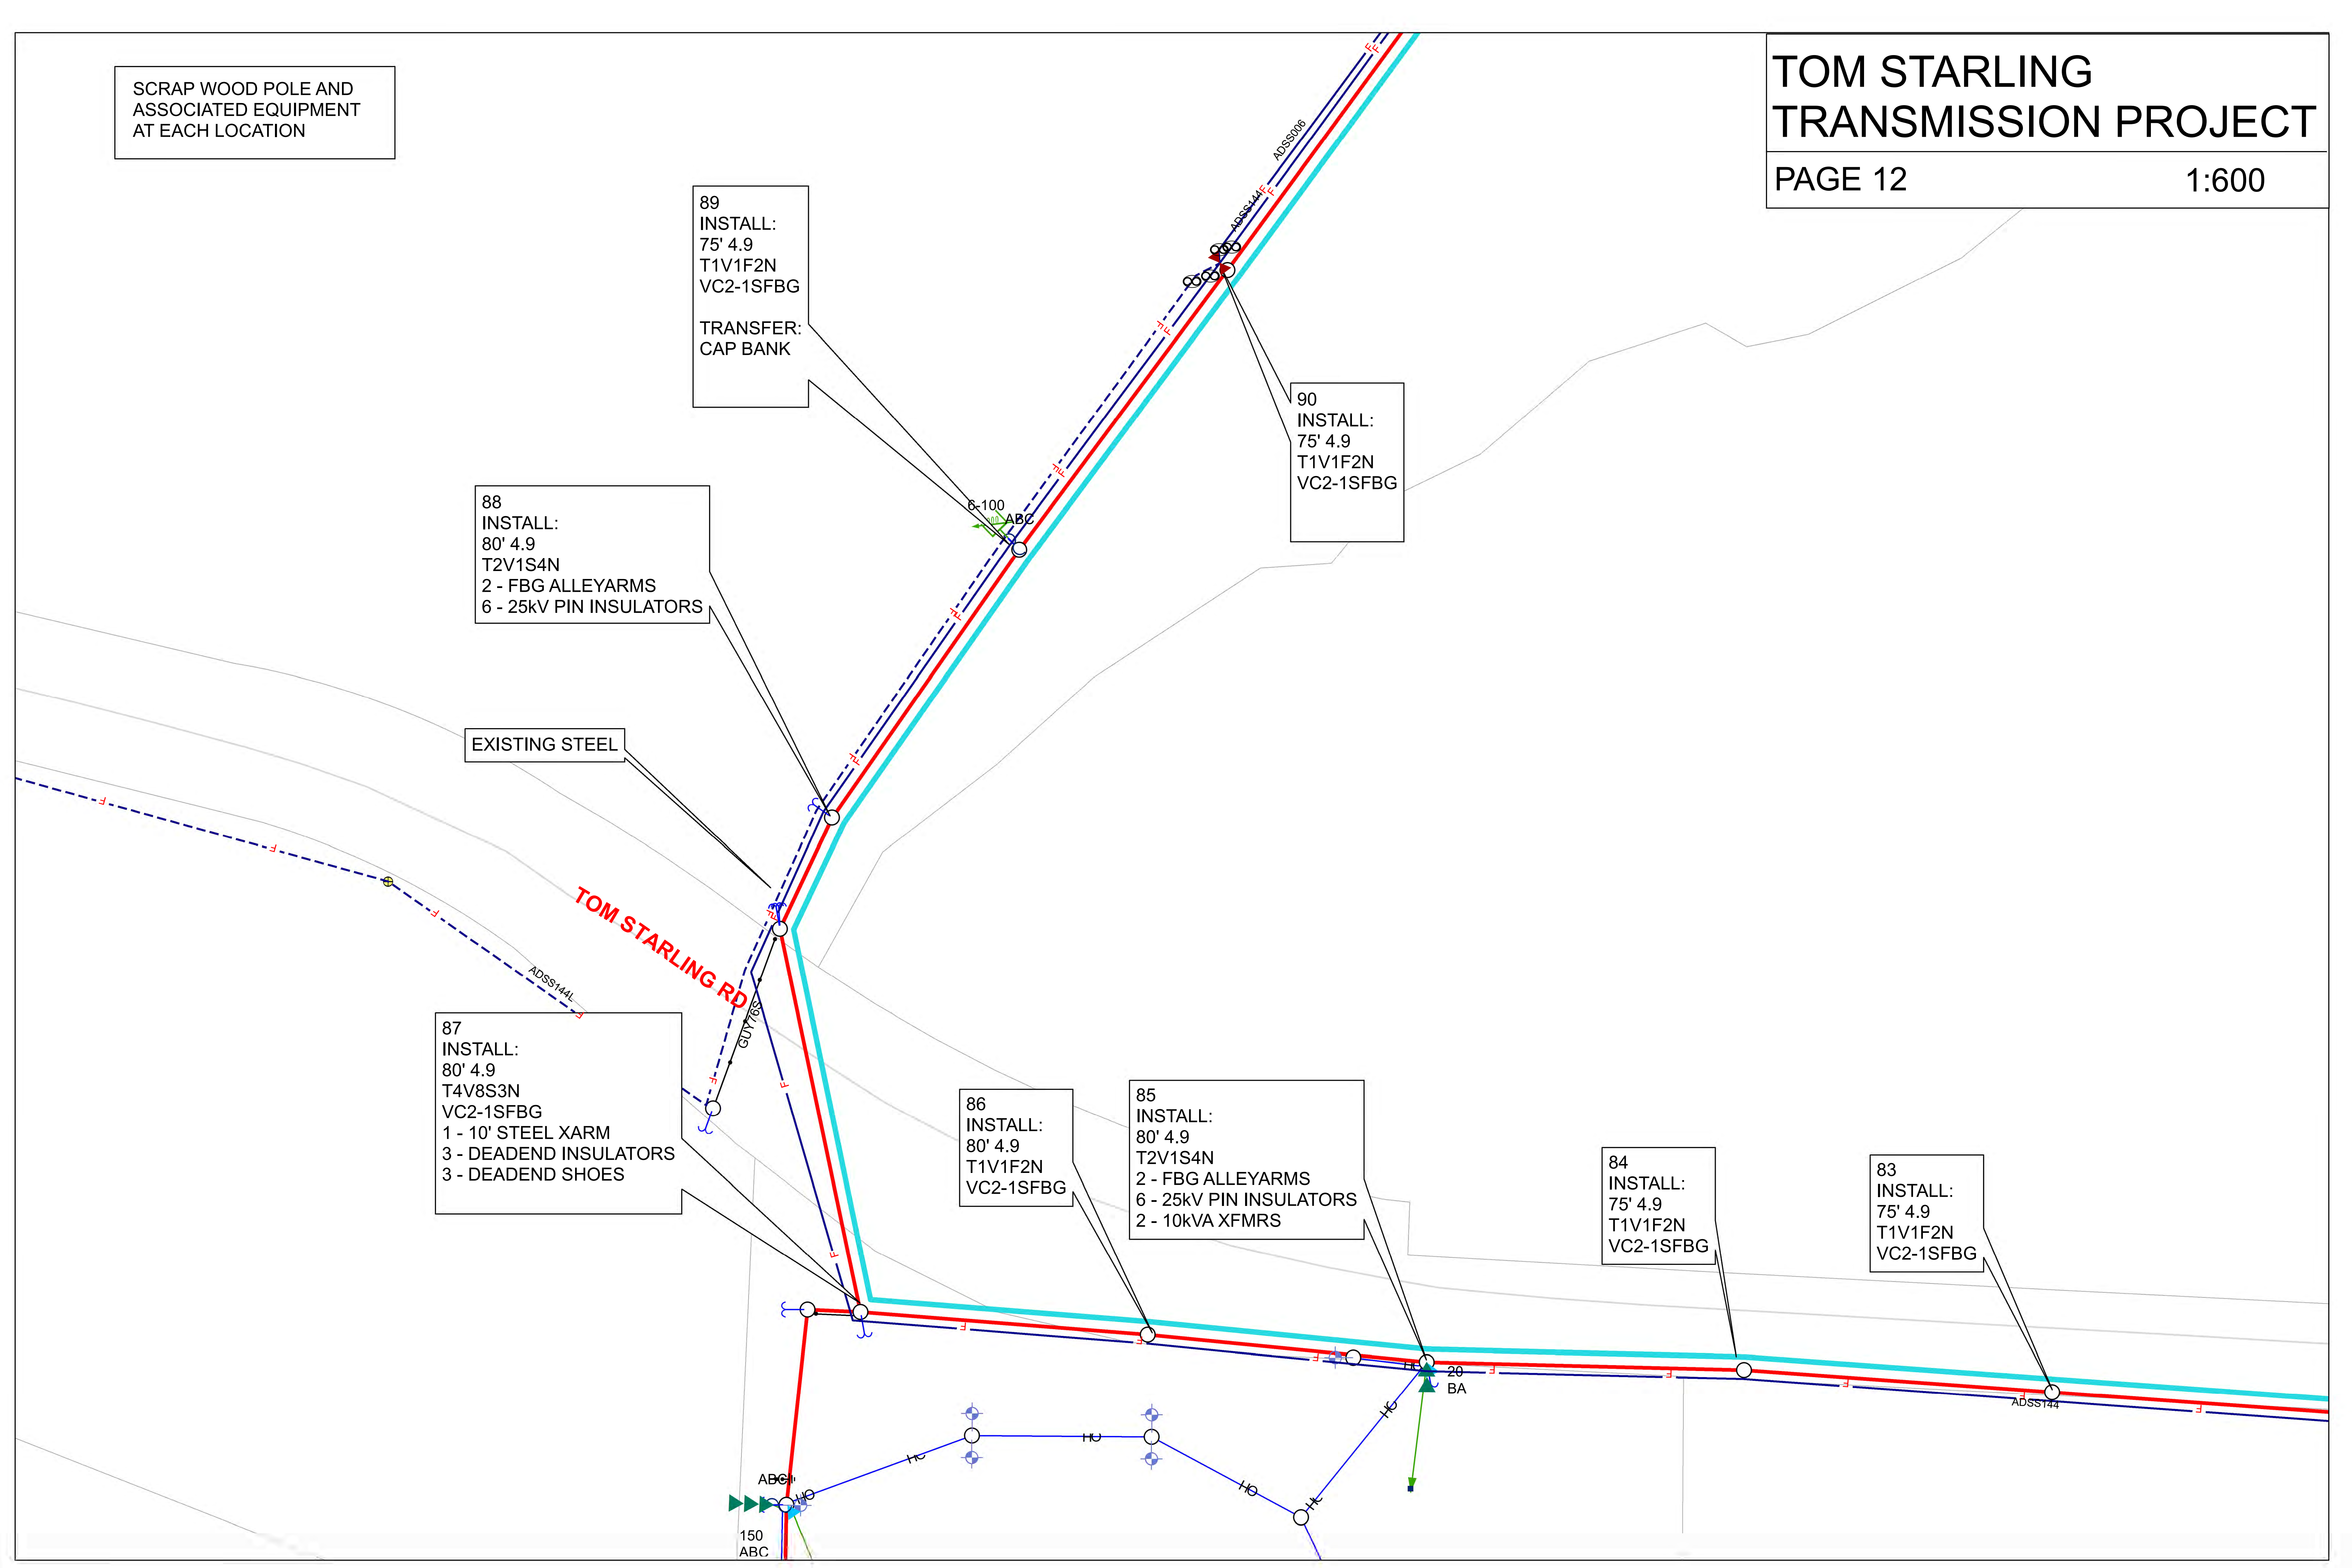

SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

CAMERON RD

I 95 BUSN

I 95 BUS S

100
INSTALL:
80' 4.9
T1V1F2N
VC2-1SFBG

99
INSTALL:
85' 5.7
T4V8S3N
2 - 10' STEEL XARM
6 - DEADEND INSULATORS
6 - DEADEND SHOES

98
INSTALL:
80' 4.9
T1V1F2N
VC2-1SFBG

97
INSTALL:
80' 4.9
T1V1F2N
VC2-1SFBG

95
INSTALL:
80' 4.9
T1V1F2N
VC2-1SFBG
2 - FBG XARM
3 - DEADEND INSULATORS
3 - DEADEND SHOES
3 - 100A CUTOUTS
3 PHASE TAP

96
INSTALL:
80' 4.9
T1V1F2N
VC2-1SFBG

94
INSTALL:
80' 4.9
T1V1F2N
VC2-1SFBG

BAC

ATTACHMENT B:

SCOPE OF WORK BRAGG BLVD TRANSMISSION PROJECT

Project Overview

This project is for the replacement of 15 wood poles to steel poles along Bragg Blvd from Filter Plant Drive to Barrington Cross Street. This pole line consists of 69kV sub-transmission with a 15kV underbuilt distribution line as well as PWC owned Fiber and Joint Use communications. This project will require the removal of existing PWC hardware to include pulling the pole, installing a new steel pole with new hardware, transferring the existing 69kV and 15kV conductor, transferring streetlights, transferring underground dips, transferring PWC fiber, and transferring joint-use communications. This project would also include flagging and traffic control.

Schedule

This project is expected to be completed in a 3-month period once PWC releases the project. This project will be partially worked on an NCDOT encroachment.

BRAGG BLVD TRANSMISSION PROJECT

PAGE 1

1:600

CLUSTER CIR

SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

EXISTING STEEL

1
INSTALL:
75' 4.2
T2V1S4N
2 - 10' FIBERGLASS ARMS
6 - DEADEND INSULATORS
25KV GOAB UNDERBUILT
6 - 15KV LIGHTNING ARRESTORS

EXISTING STEEL

SKIP POLE

2
INSTALL:
75' 4.2
T1V1F2N
VC2-1SFBG
2 - 10' FIBERGLASS ARMS
1 - MIF BRACKET
3 - DEADEND INSULATORS
3 - 100A CUTOUTS

EXISTING STEEL


3
INSTALL:
75' 4.2
T2V1S4N
VC2-1SFBG

4
INSTALL:
75' 4.2
T2V1S4N
VC2-1SFBG
1 - DEADEND INSULATOR
1 - MIF BRACKET
1 - 100A CUTOUT

EXISTING STEEL

LIFT POLE

5
INSTALL:
75' 4.2
T2V1S4N
VC2-1SFBG
25KV TRANSFORMER

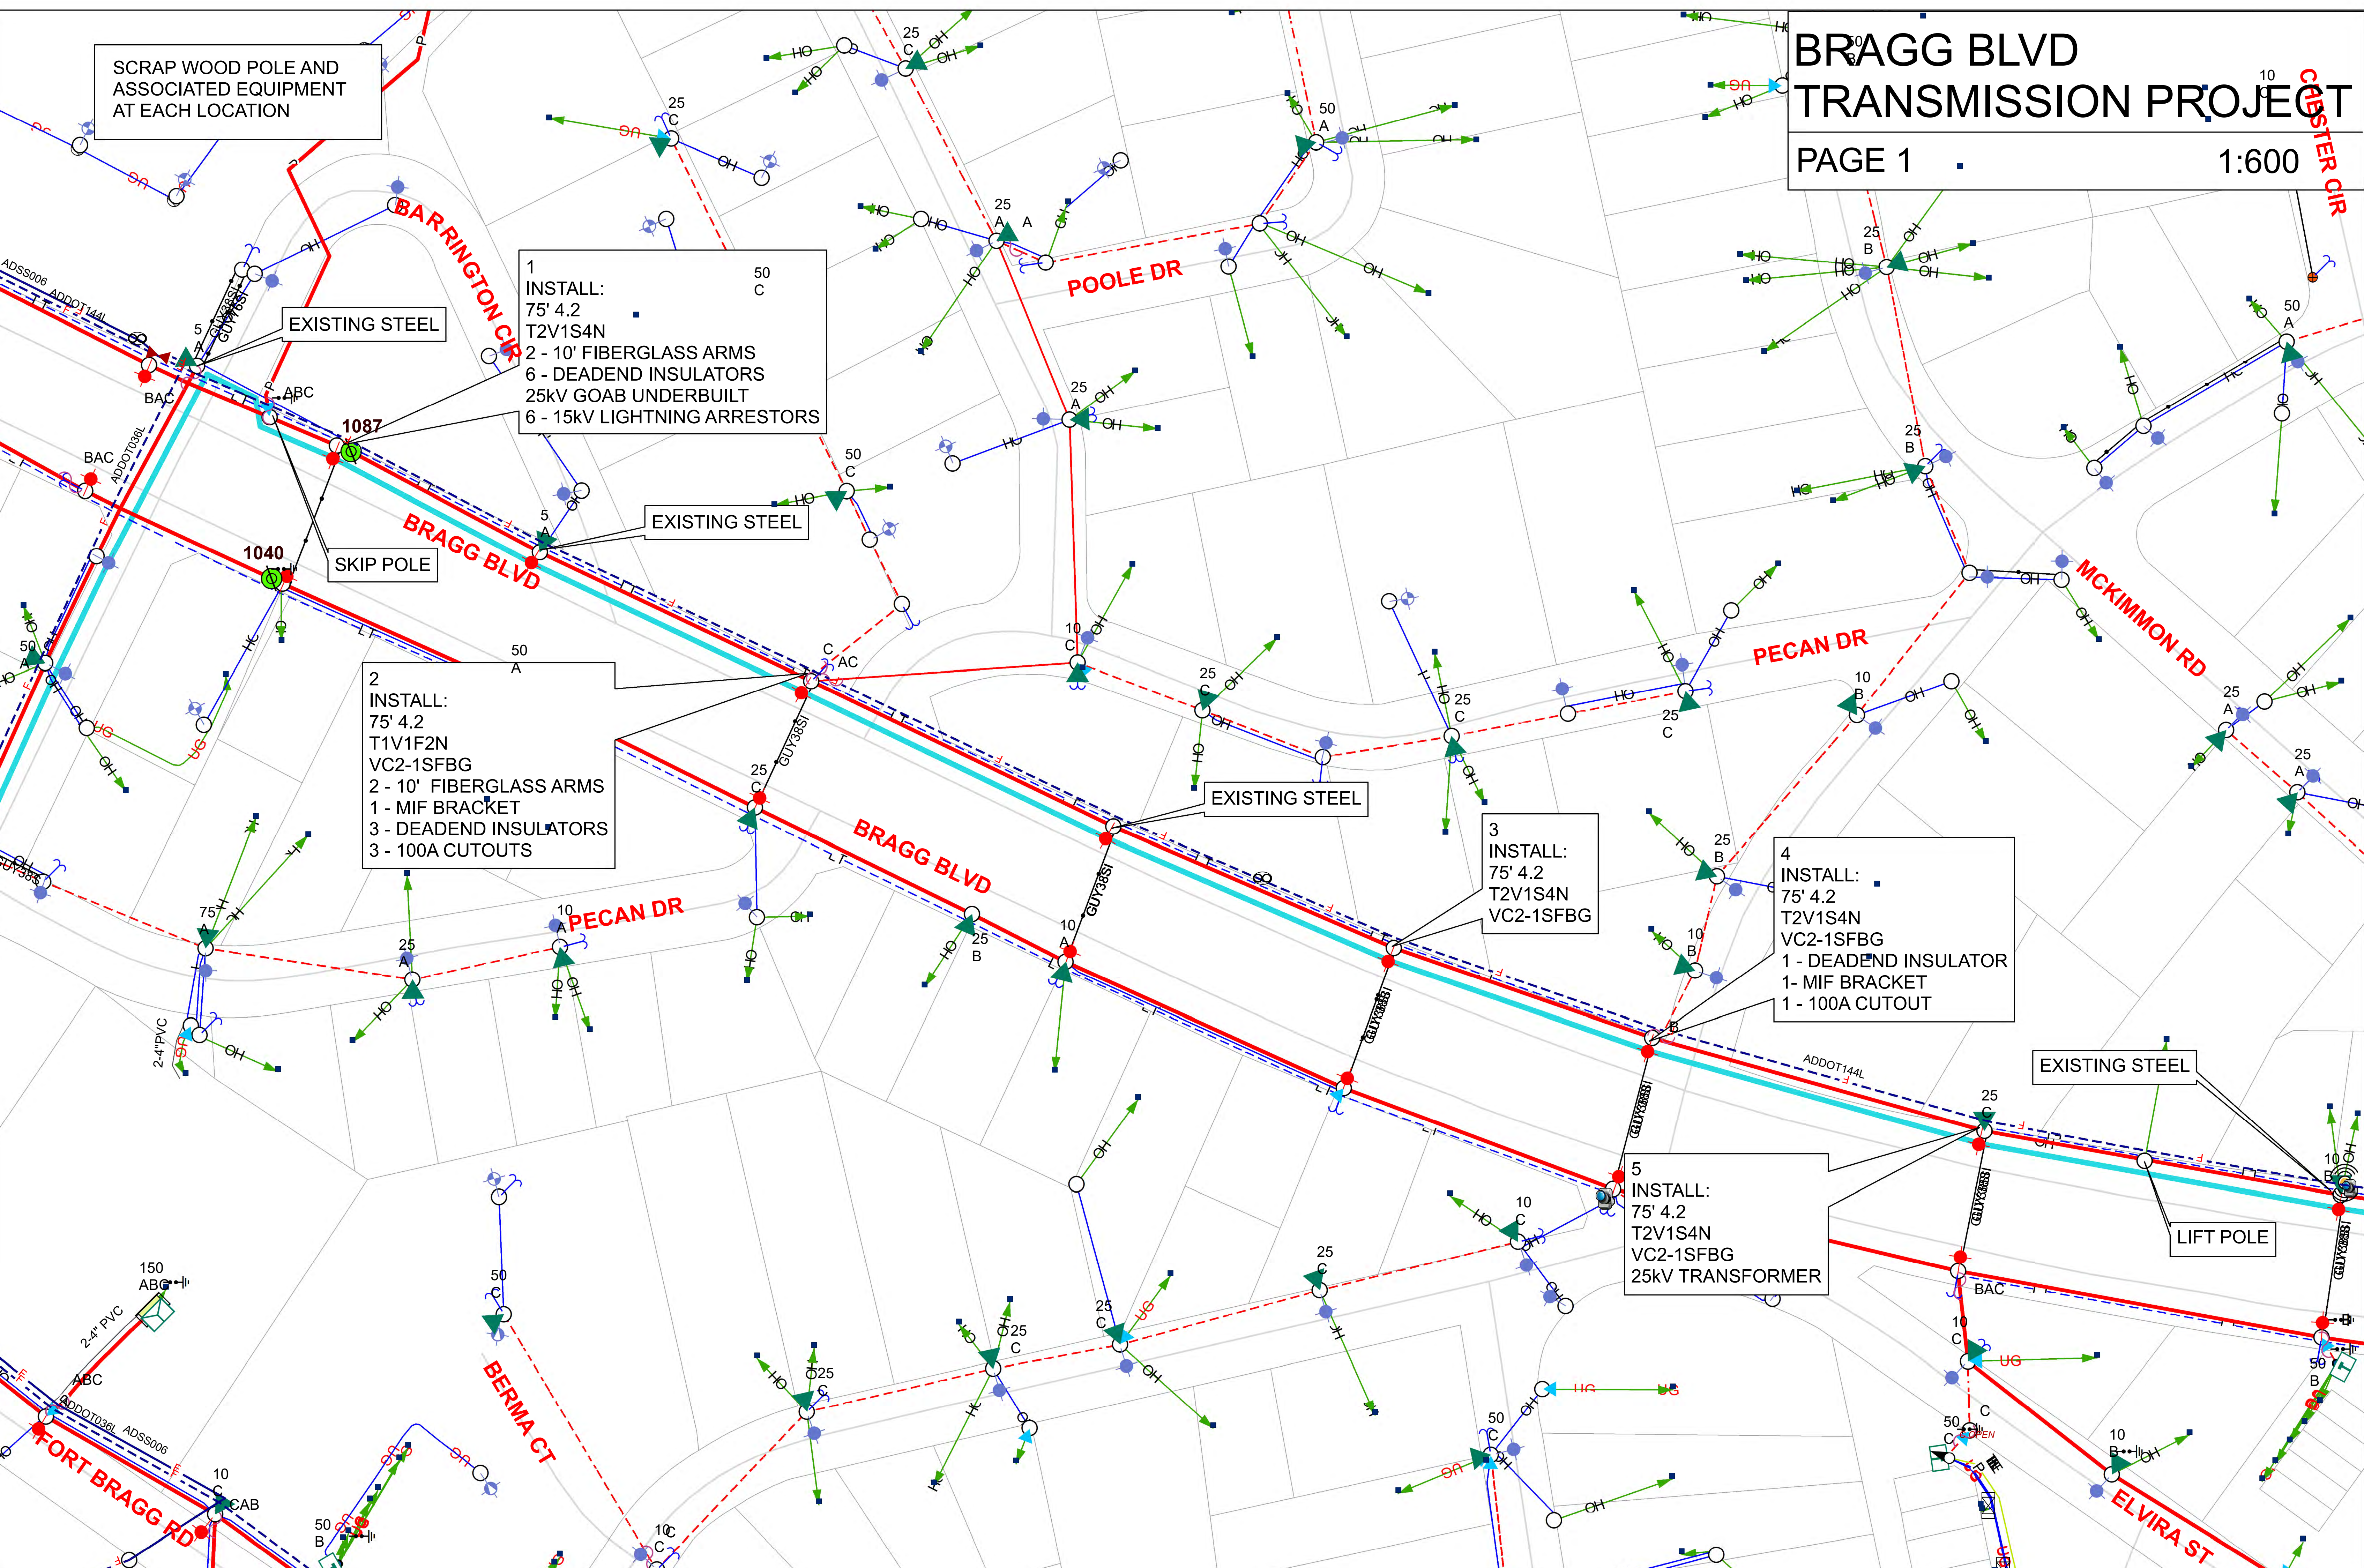

BRAGG BLVD TRANSMISSION PROJECT

PAGE 2

1:600

SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

ANARINE RD

CREEK SIDE RUN

HAVILAH RD

PILOT AVE

ELVIRA ST

6
INSTALL:
75' 4.2
T1V1F2N
VC2-1SFBG
2 - 10' FIBERGLASS ARMS
2 - DEADEND INSULATORS
2 - 100A CUTOUTS

7
INSTALL:
75' 4.2
T1V1F2N
VC2-1SFBG

8
INSTALL:
75' 4.2
T1V1F2N
VC2-1SFBG


EXISTING STEEL

EXISTING STEEL


EXISTING STEEL

SKIP POLE

EXISTING STEEL

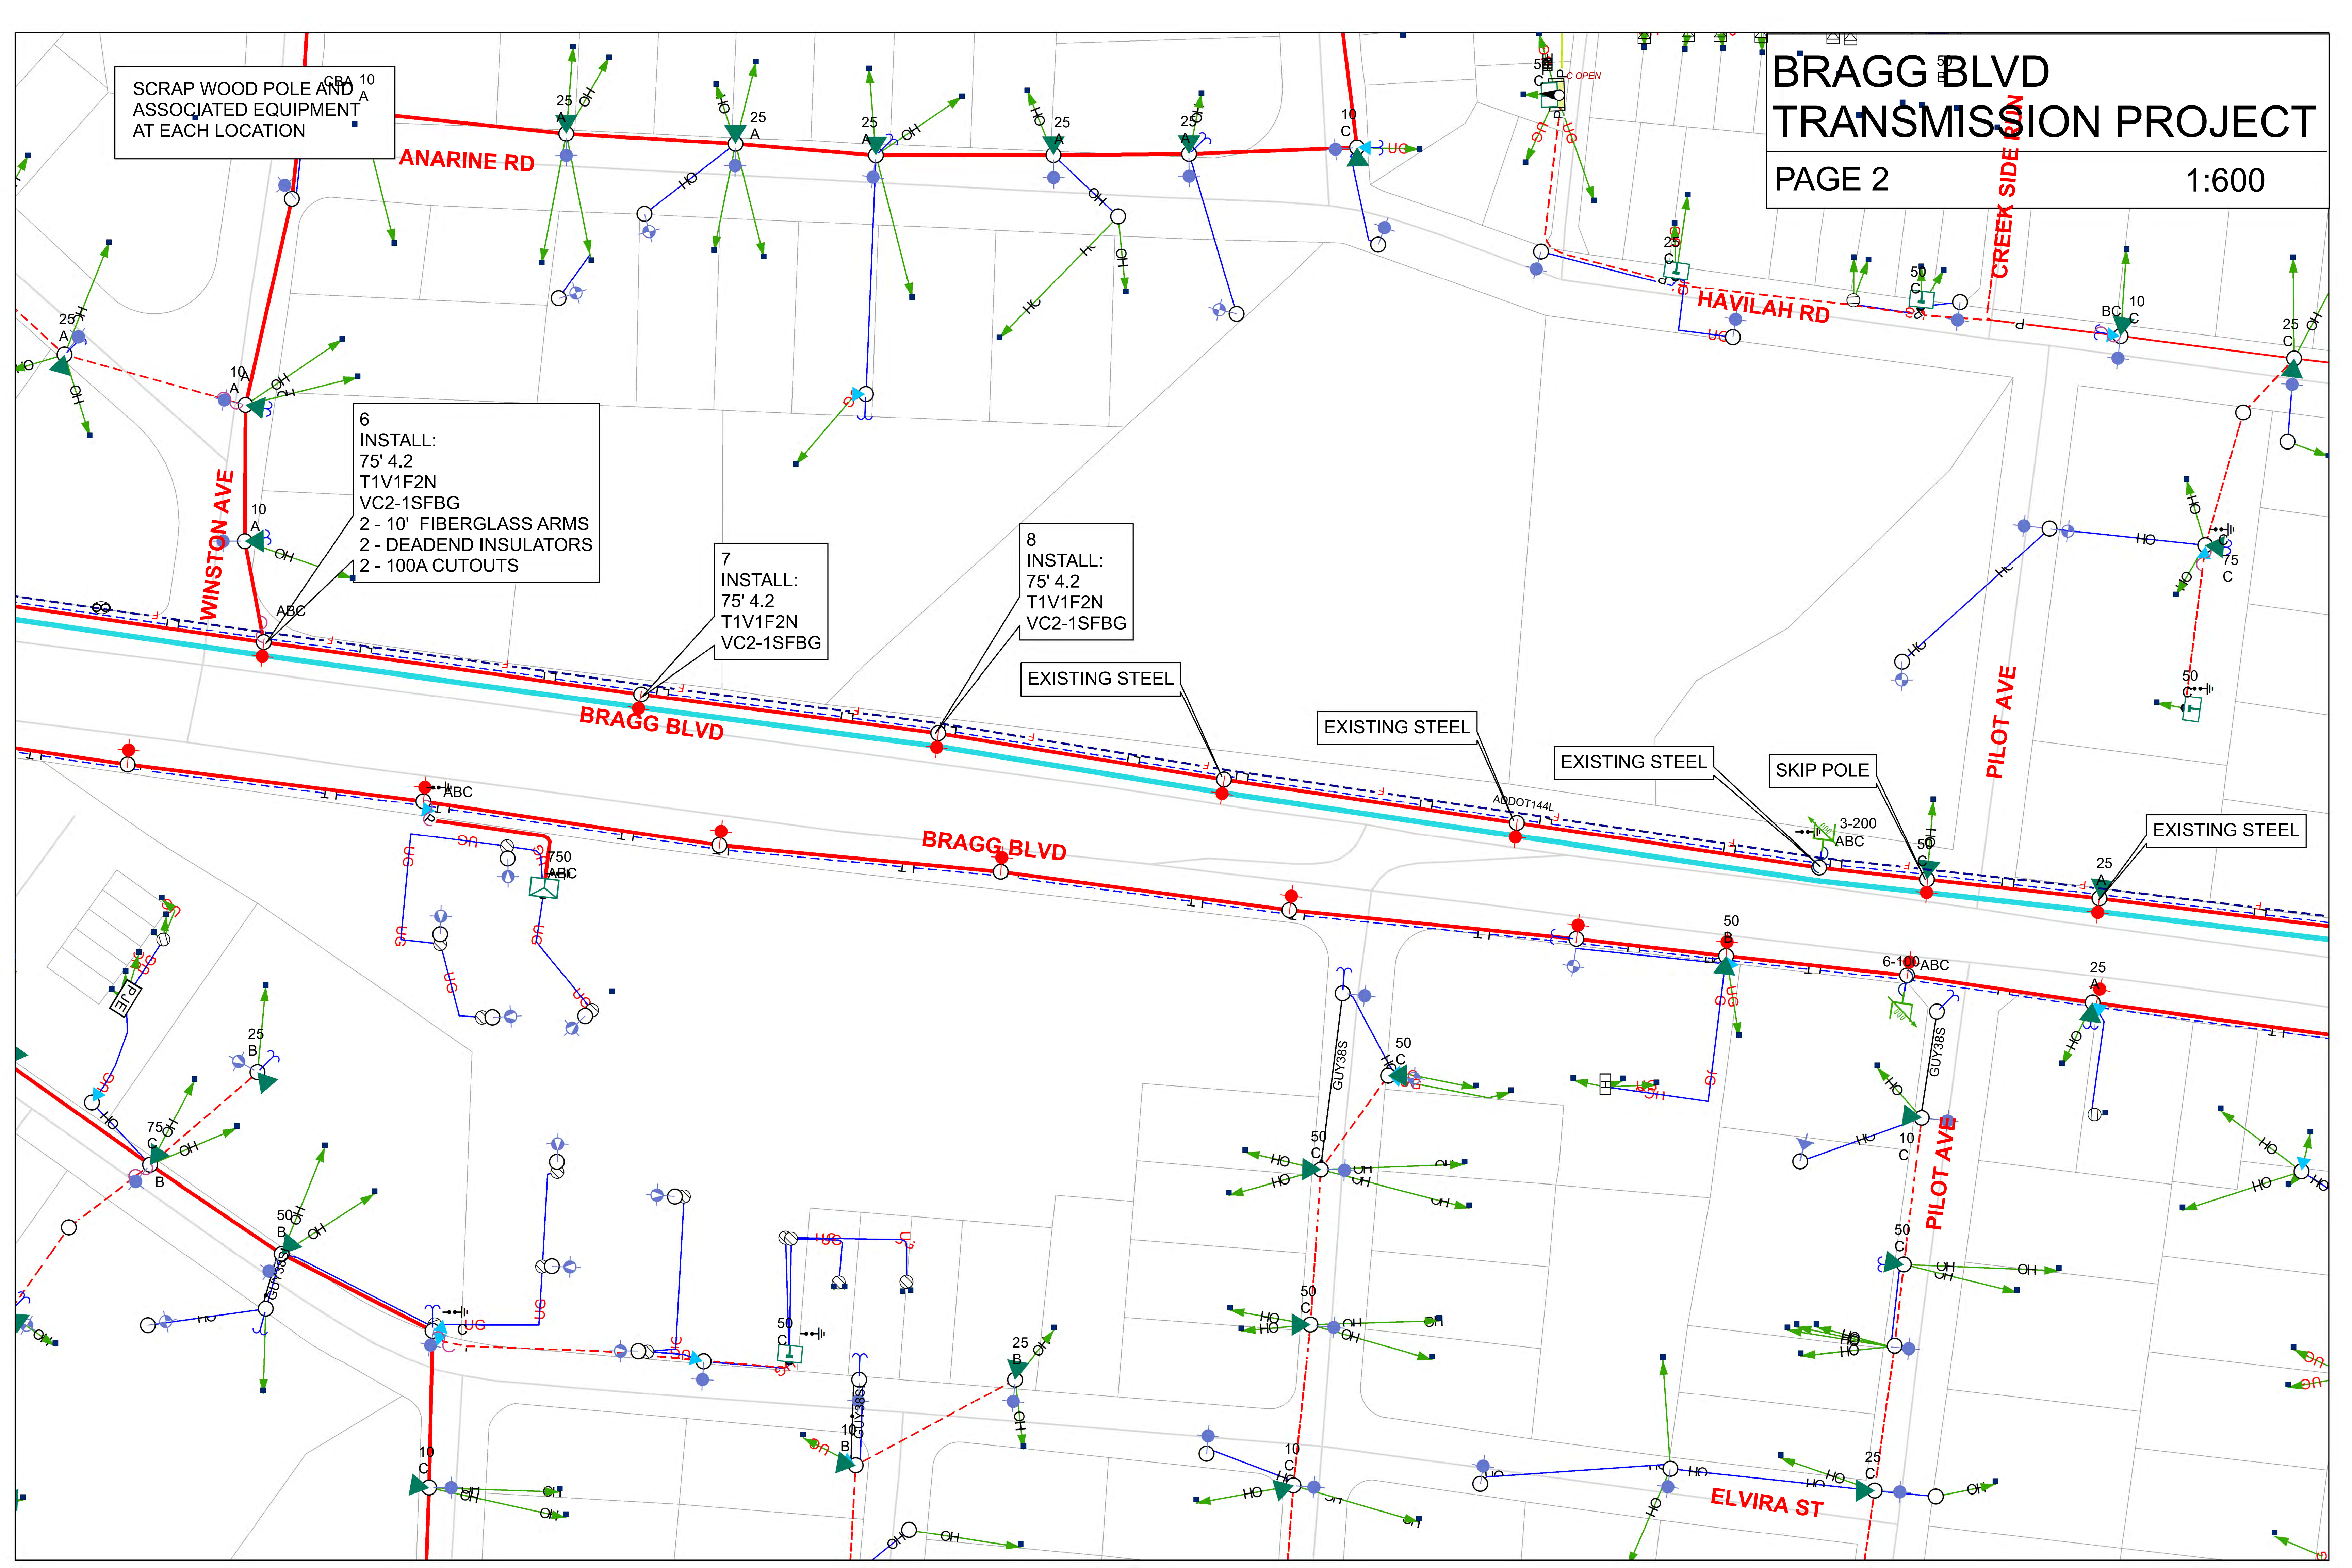


1:600

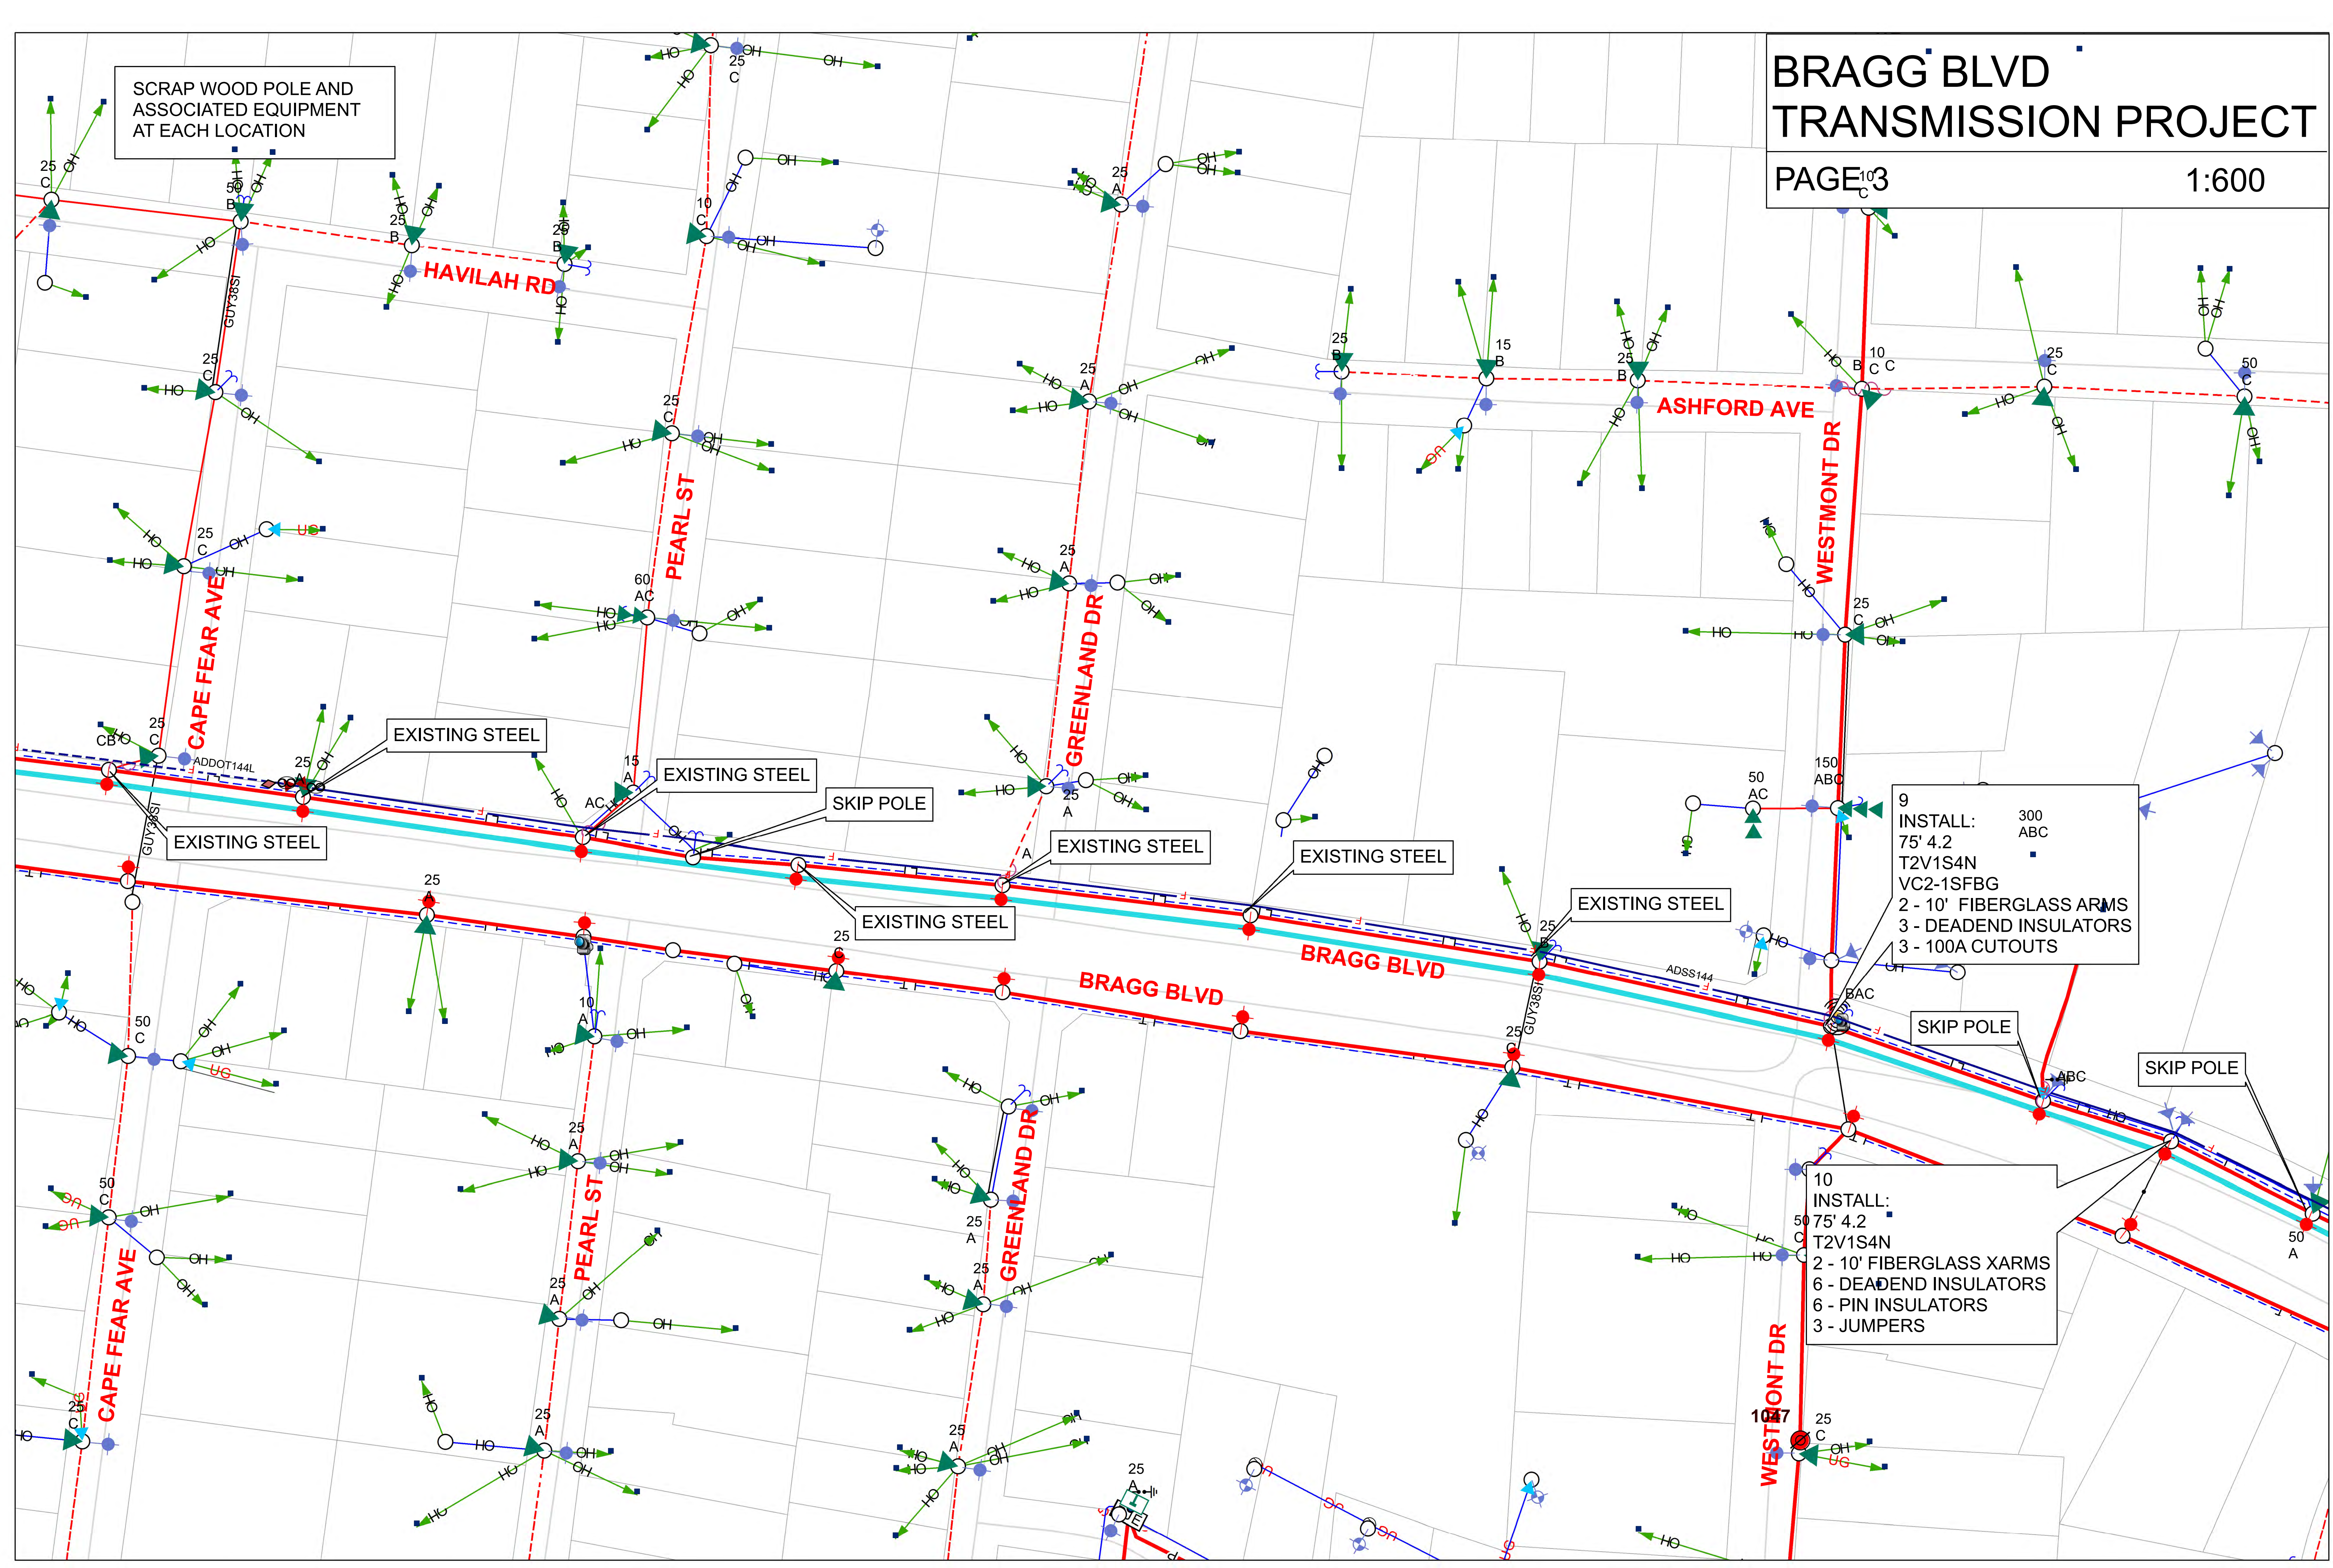

PAGE 4 ^{LF}SS006U 1:600

PAGE 4

:600

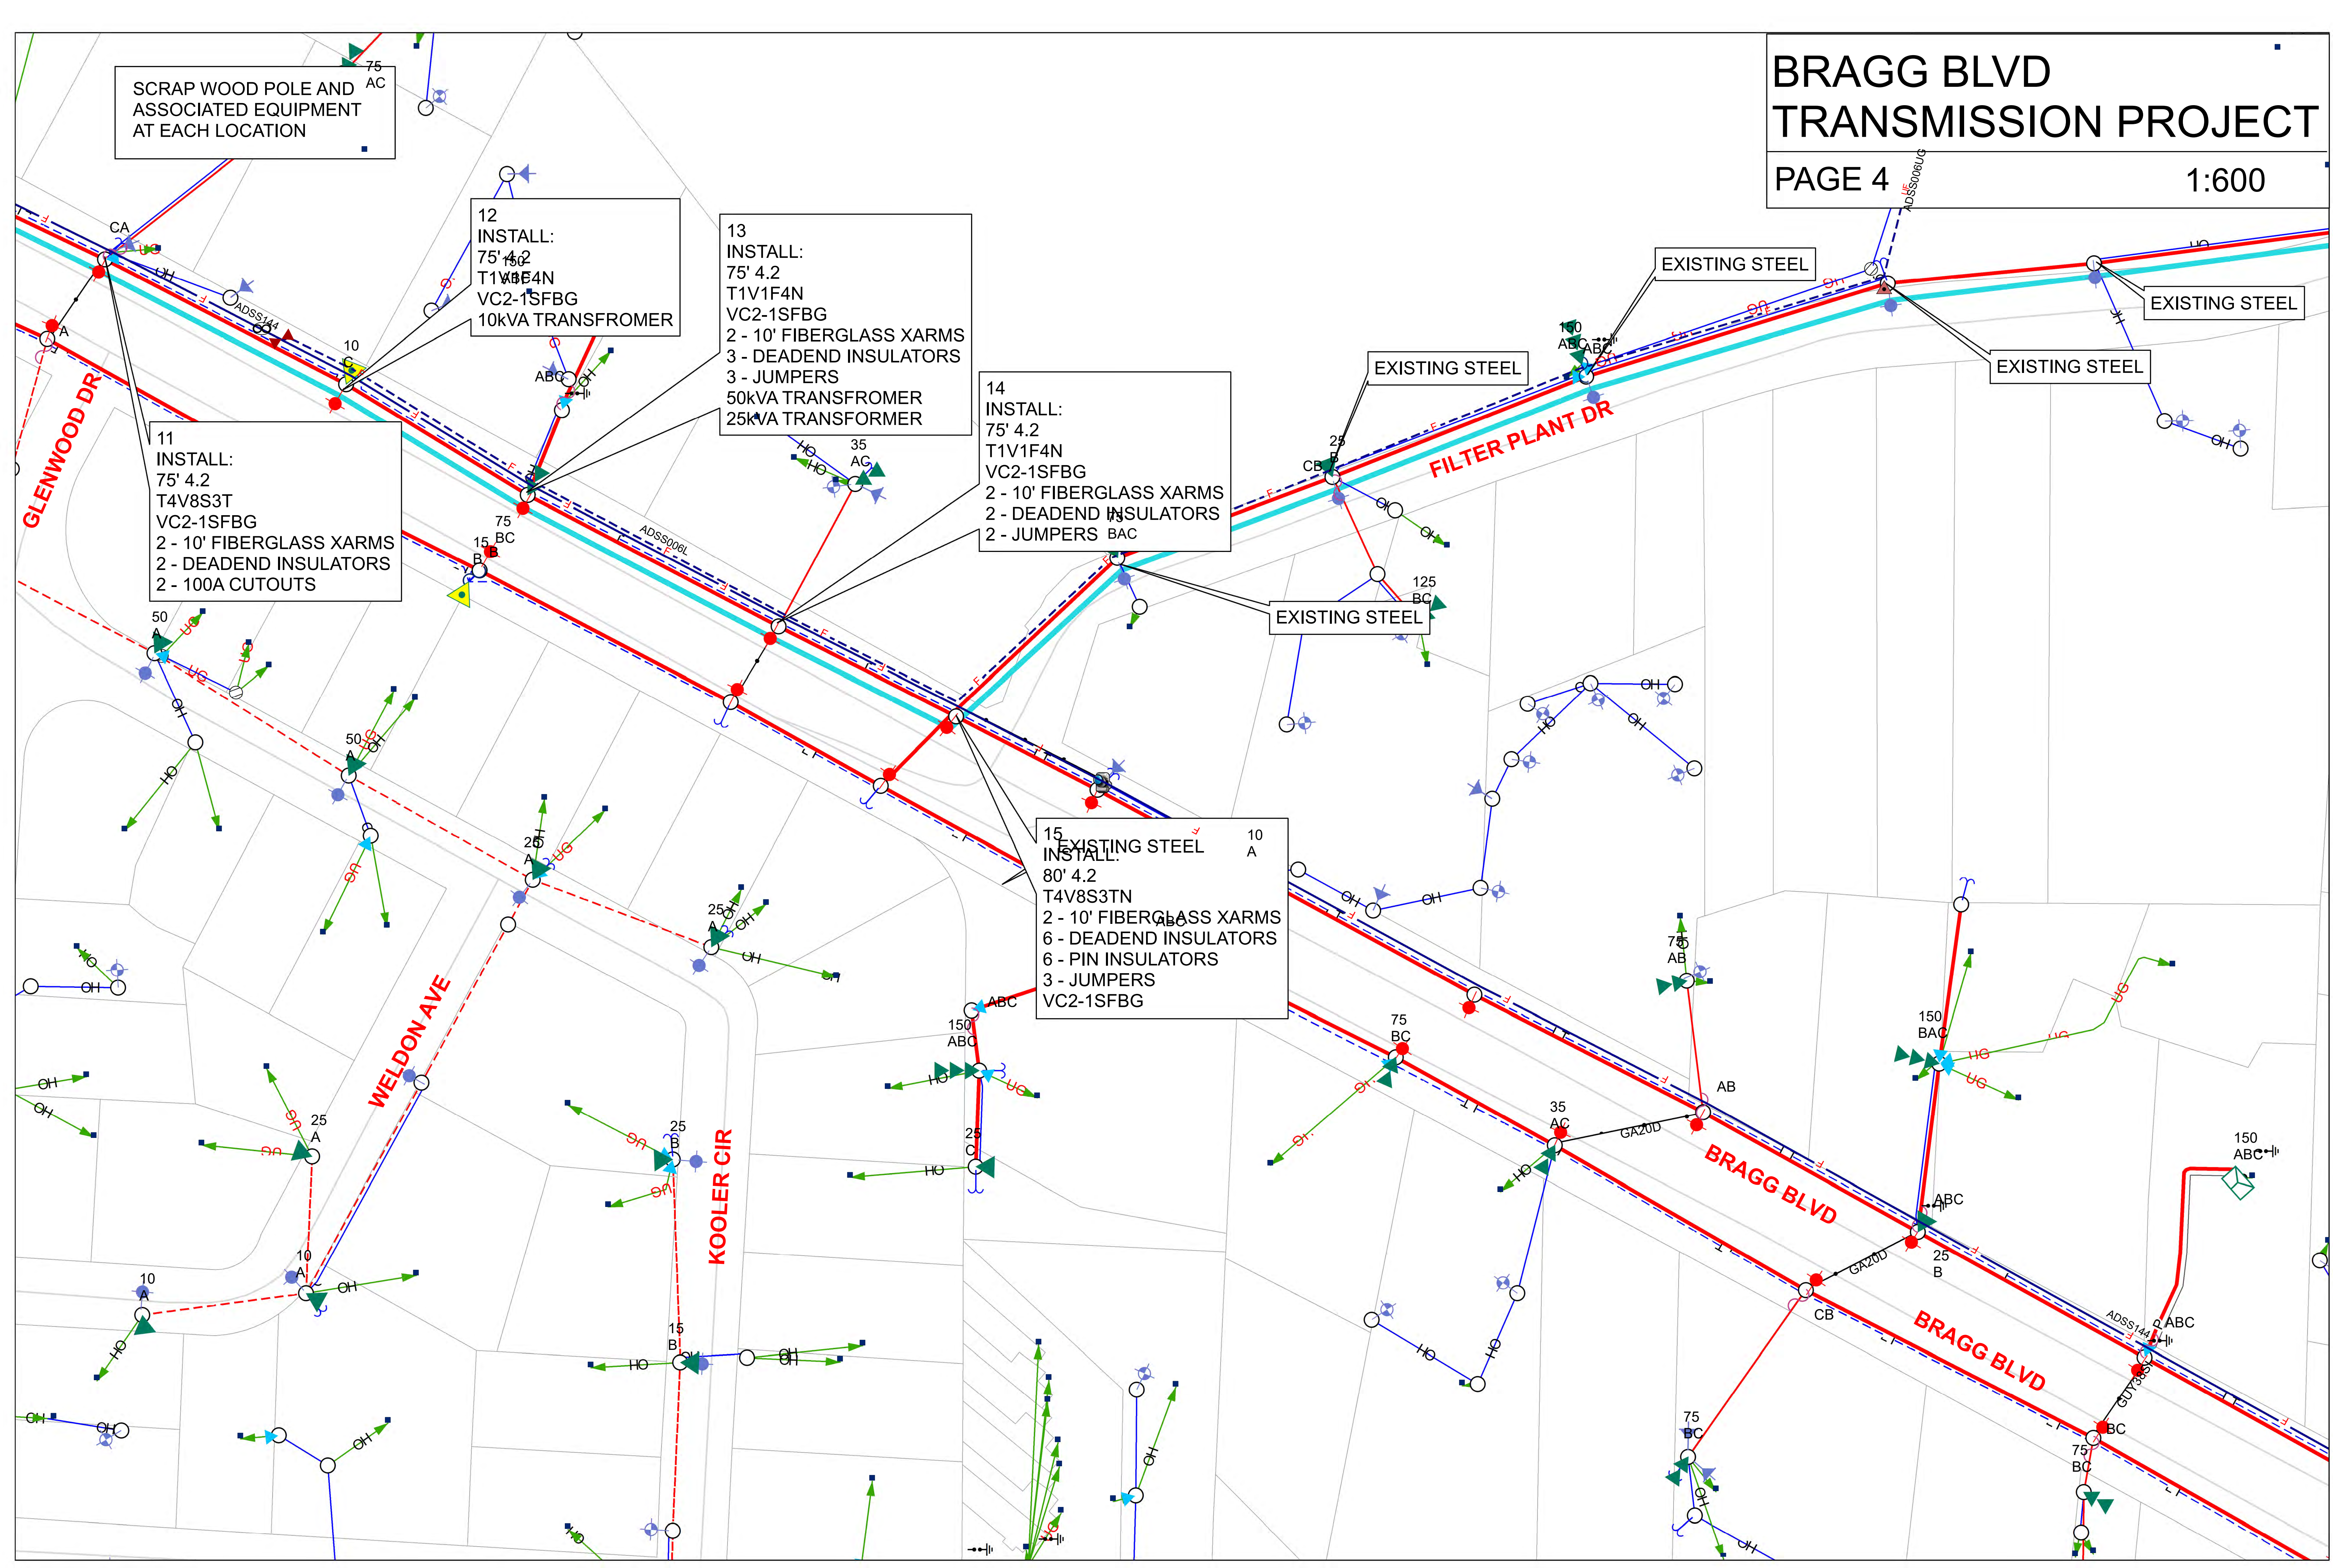

ATTACHMENT C:

SCOPE OF WORK **TESS TO DUNN TRANSMISSION PROJECT**

Project Overview

This project is for the replacement of 58 wood poles to steel poles along PWC Right Of Way from TESS Substation to Dunn Road. This pole line consists of 69kV sub-transmission with a 15kV underbuilt distribution line as well as PWC owned Fiber and Joint Use communications. This project will require the removal of existing PWC hardware to include pulling the pole, installing a new steel pole with new hardware, transferring the existing 69kV and 15kV conductor, transferring streetlights, transferring underground dips, transferring PWC fiber, and transferring joint-use communications. This project would also include flagging and traffic control.

Schedule

This project is expected to be completed in a 6-month period once PWC releases the project. This project will be partially worked on an NCDOT encroachment.

SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

9
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

10
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

11
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

13
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

12
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

14
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

15
INSTALL:
85' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Double Deadend w/o Supports
3-Phase Distribution Corner Structure
9-Insulated 7#6 Downguys
2-7#6 Downguys

16
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

17
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

HERITAGE LN

UNDERWOOD RD

WILLOUGHBY DR

SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

18
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

19
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

20
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

21
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

22
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

23
INSTALL:
85' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Stacked Structure(15 Degree Maximum)
2-Insulated7#6 Downguys
1-7#6 Downguy
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

24
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

25
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

26
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

27
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

29
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

28
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

30
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

31
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

32
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

33
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

34
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

37
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

35
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

36
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

38
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

39
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure



40
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

41
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

MIDDLE RD

BEECHRIDGE RD

BONWOOD ST



SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

42
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

43
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure


45
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure


44
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

47
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

46
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure

48
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure
Distribution Horizontal GOAB Switch Underbuild
6-35 kV Insulator Deadends

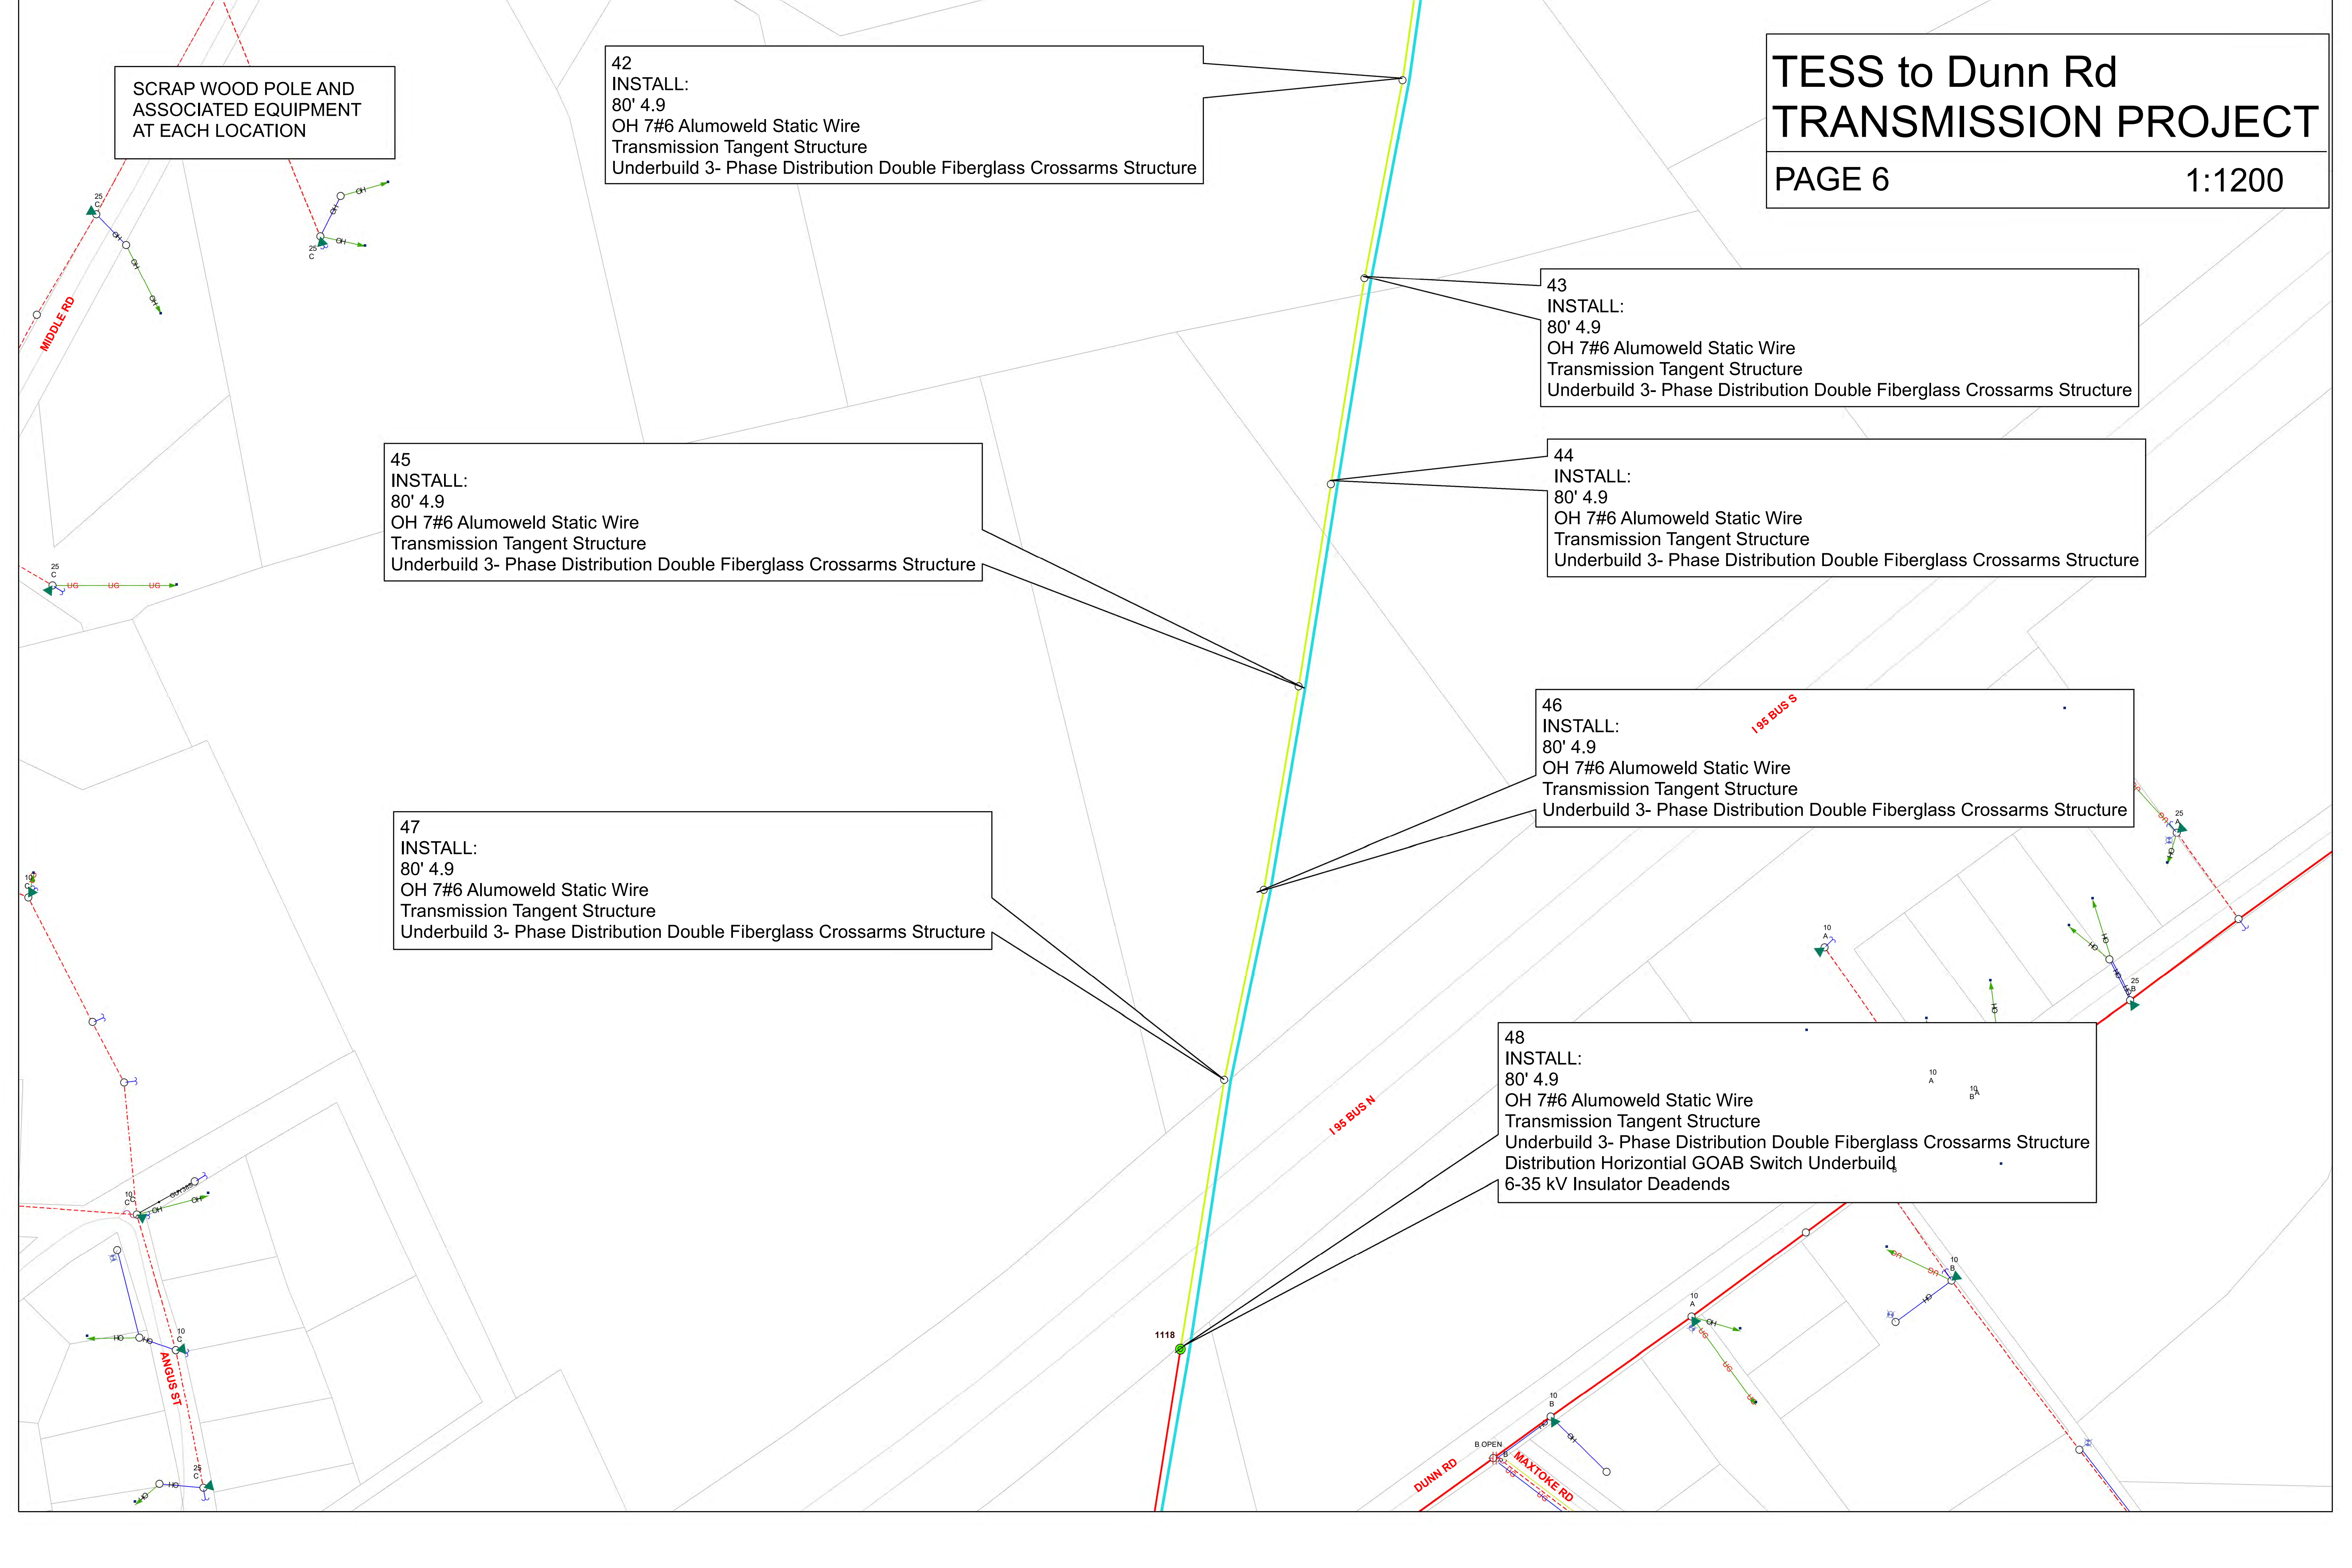

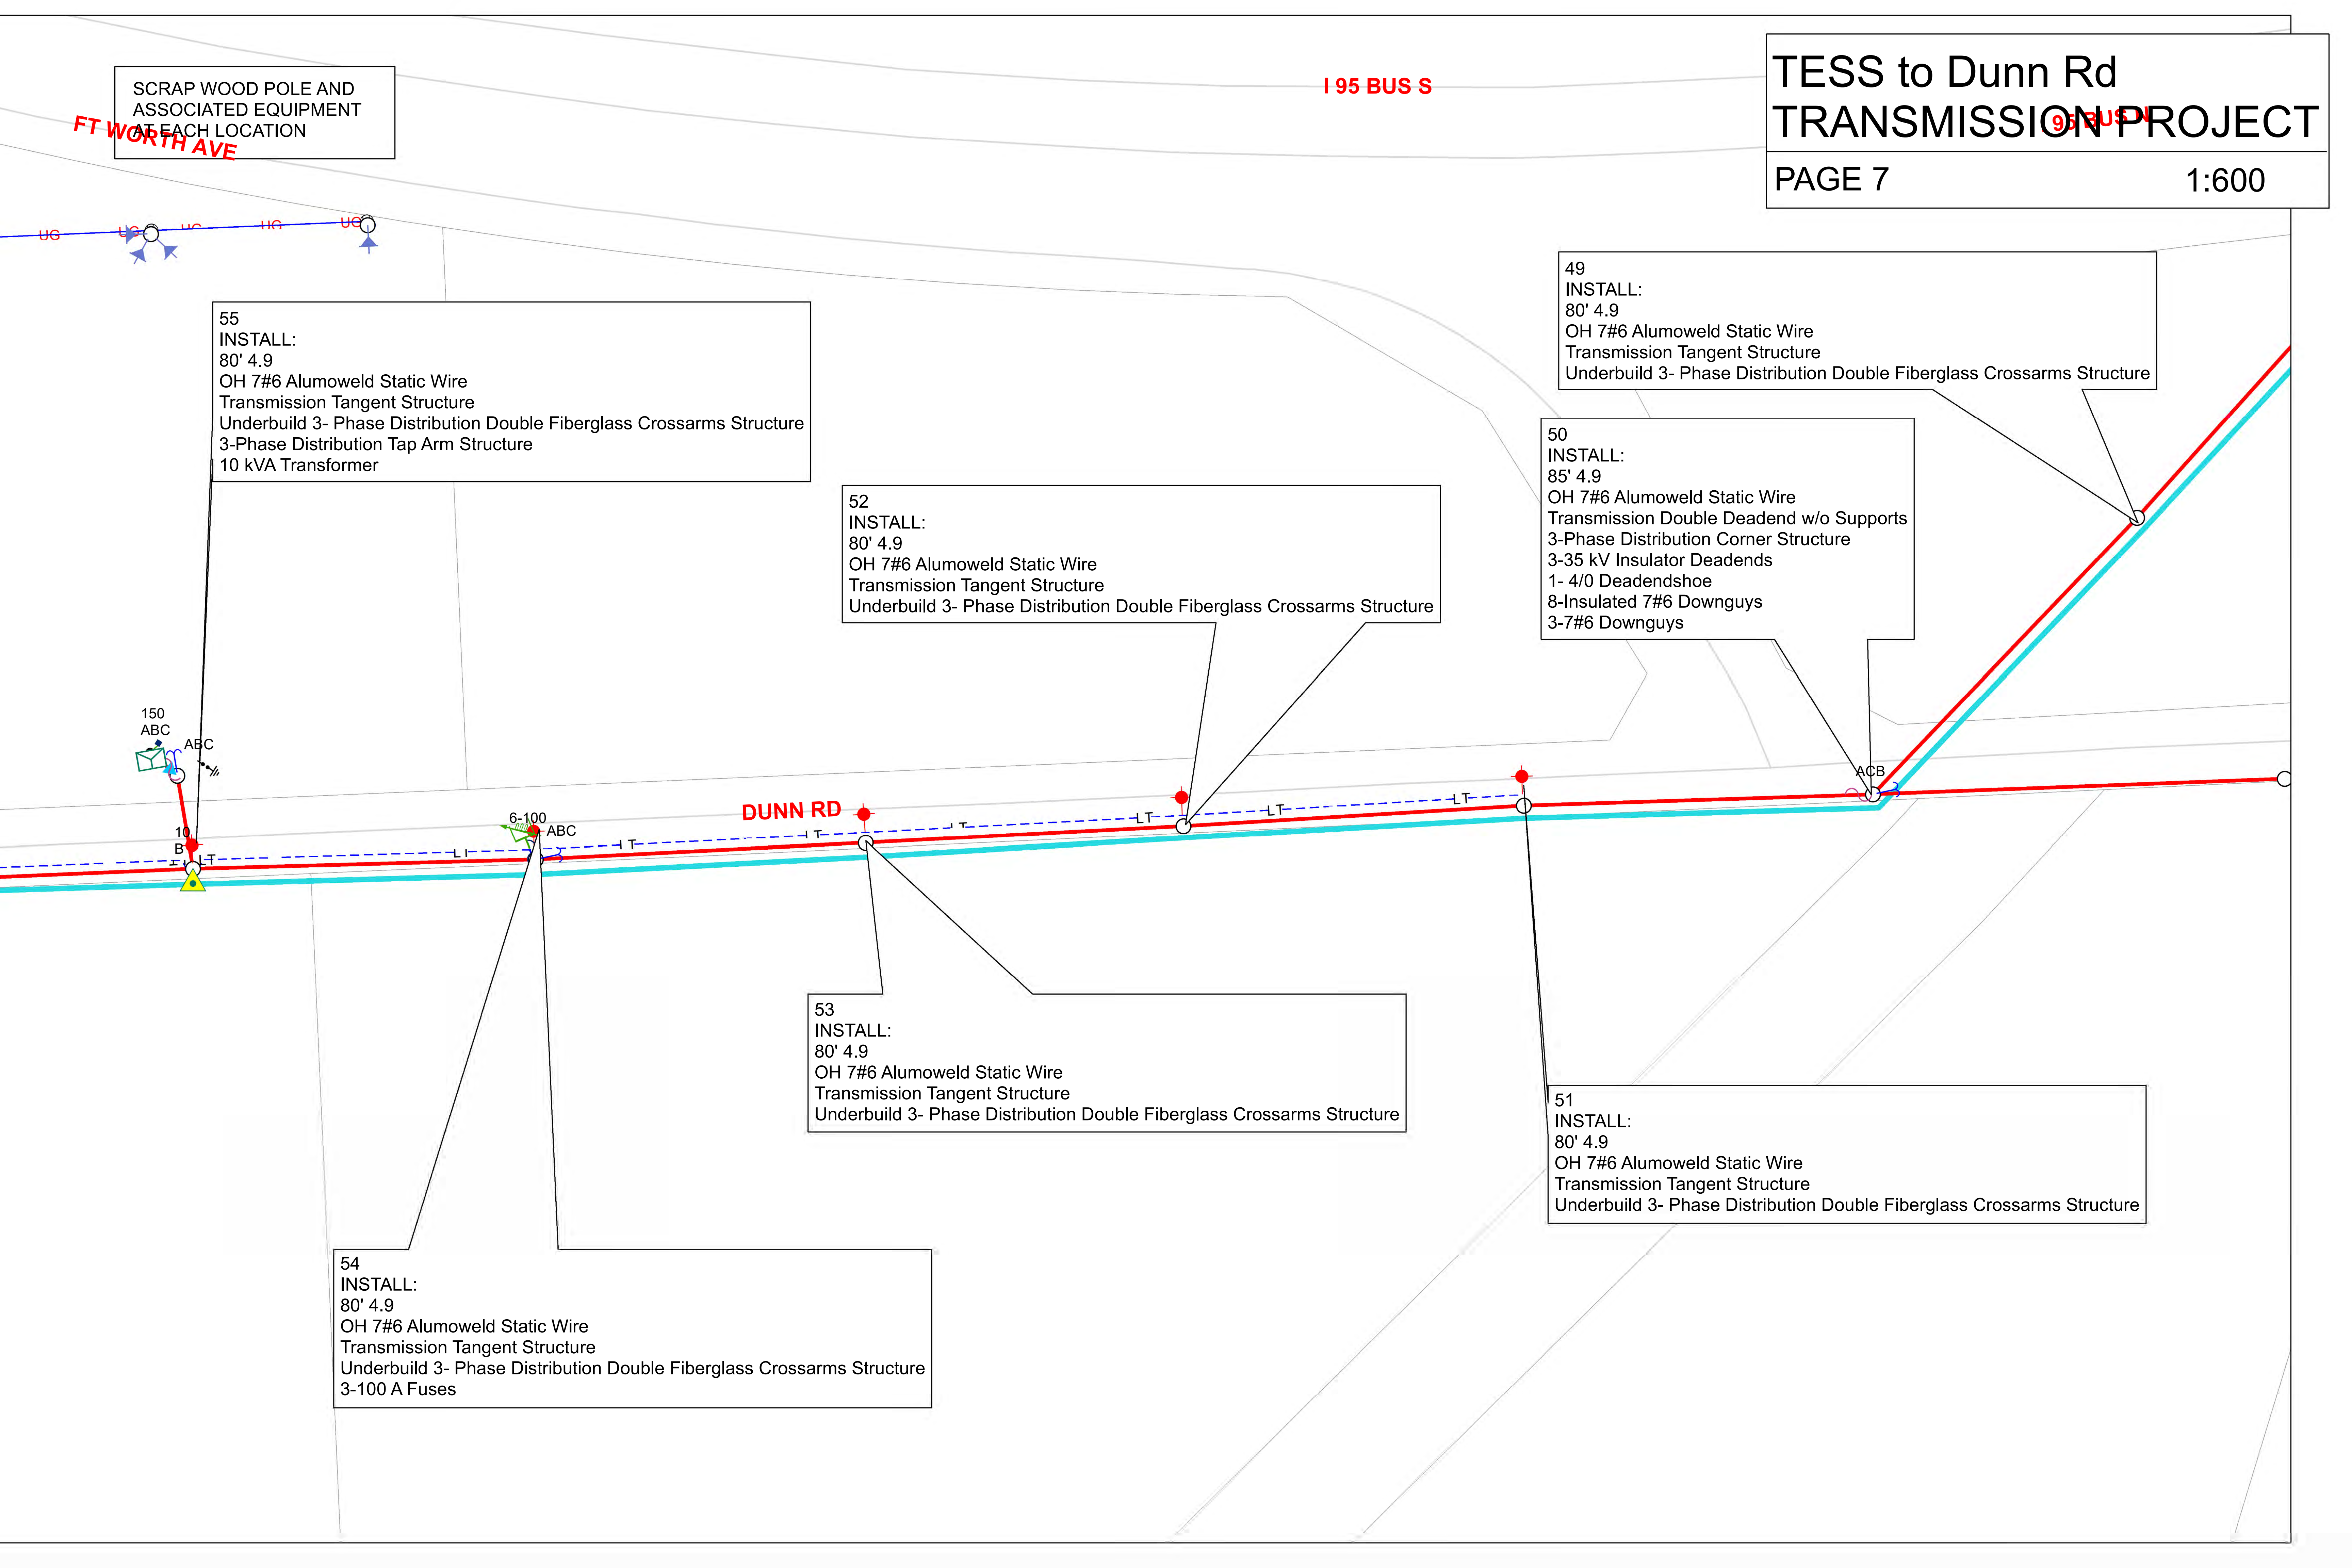


SCRAP WOOD POLE AND
ASSOCIATED EQUIPMENT
AT EACH LOCATION

58
INSTALL:
85' 4.9
OH 7#6 Alumoweld Static Wire
One Way Transmission 69 kV Switch
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure
6-35 kV Insulator Deadends
3-100 A Fuses
UGARD 4"

56
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3-Phase Distribution Double Fiberglass Crossarms Structure
3-100 A Fuses
UGARD 4"

57
INSTALL:
80' 4.9
OH 7#6 Alumoweld Static Wire
Transmission Tangent Structure
Underbuild 3- Phase Distribution Double Fiberglass Crossarms Structure
3-Phase Tap Arm Structure 3-3"

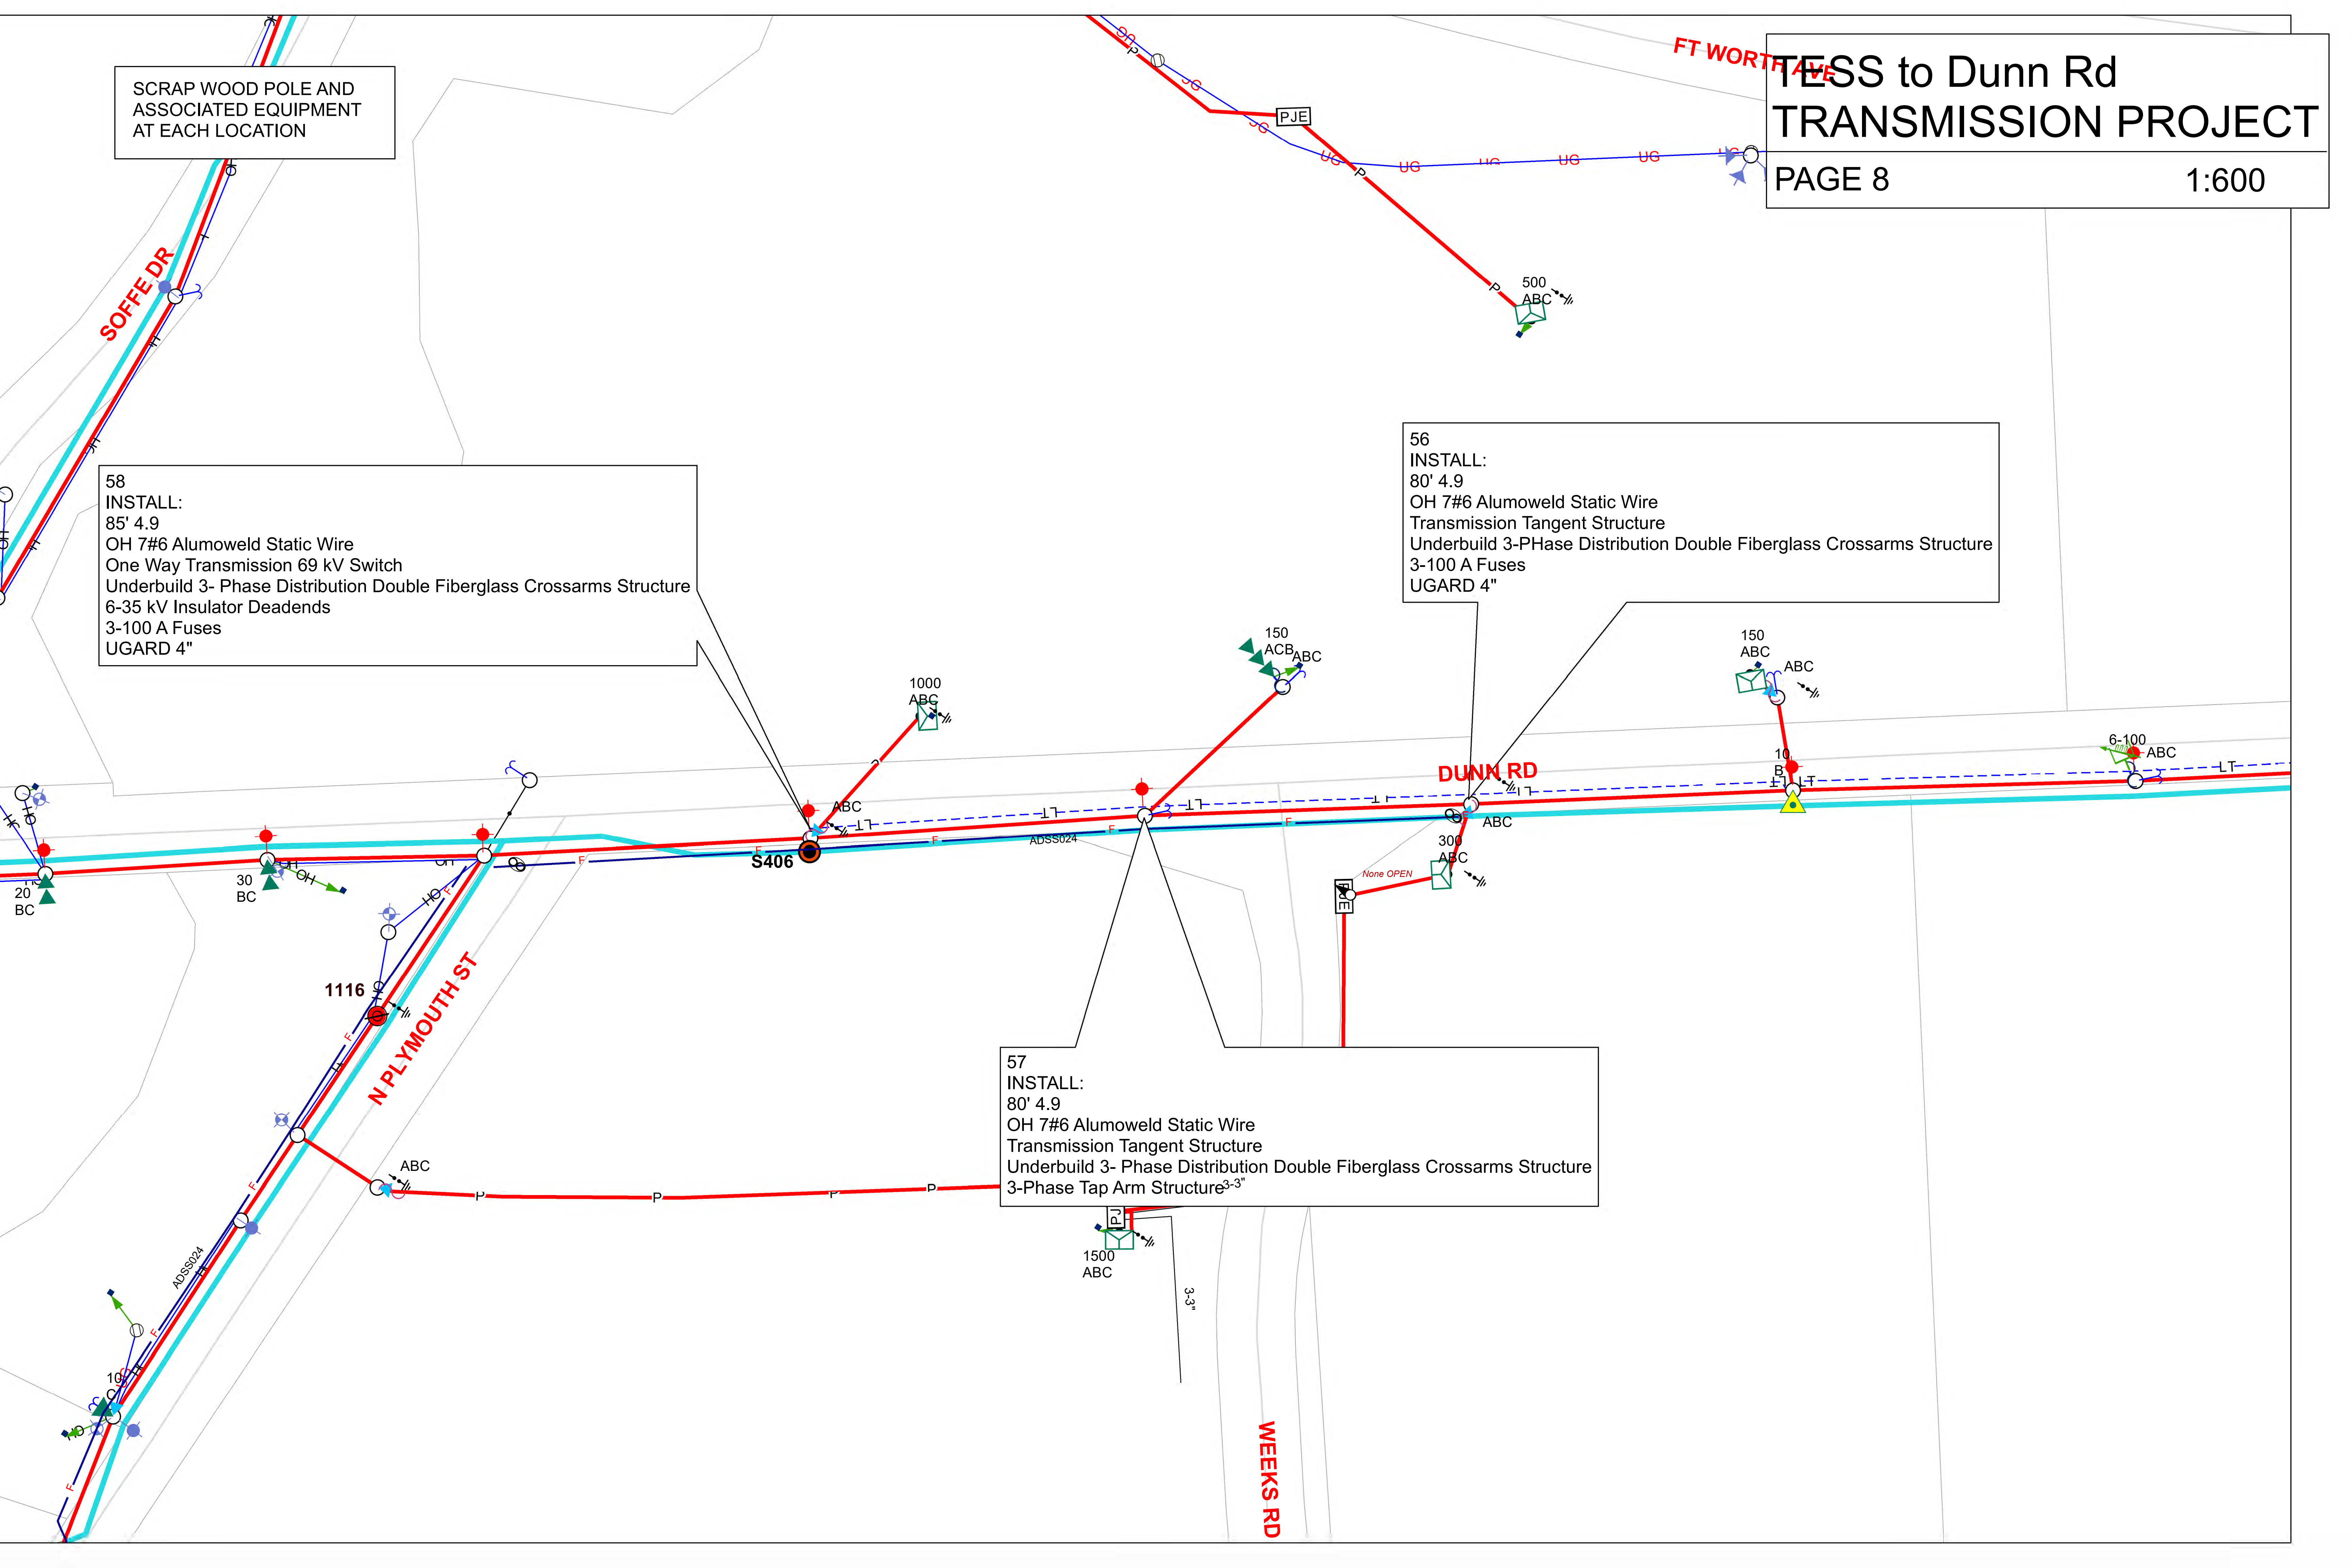

ATTACHMENT D:

SCOPE OF WORK **MCARTHUR ROAD (POD V 230 kV)** **TRANSMISSION PROJECT**

Project Overview

This project is for the installation of 9 steel poles along a new Right of Way from the Duke tap to POD V off McArthur Road. This pole line consists of a 230kV transmission line with poles up to 100' in height. The new poles will be installed with the appropriate 230kV hardware, installation of 3 x 954 conductor and 7#6 OHGW.


Schedule

This project is expected to be completed in a 6-month period once PWC releases the project.


PWC FAYETTEVILLE
FAYETTEVILLE, NORTH CAROLINA
230kV TRANSMISSION LINE
TAP TO POD 5 T-LINE



TYPICAL GUY/ANCHOR
ORIENTATION

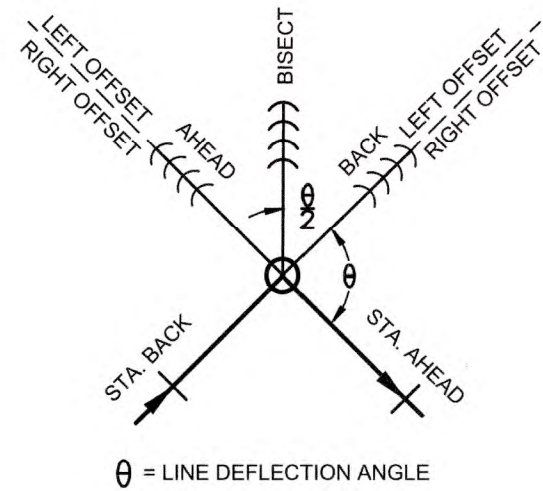

230kV STRUCTURE INFORMATION DETAIL

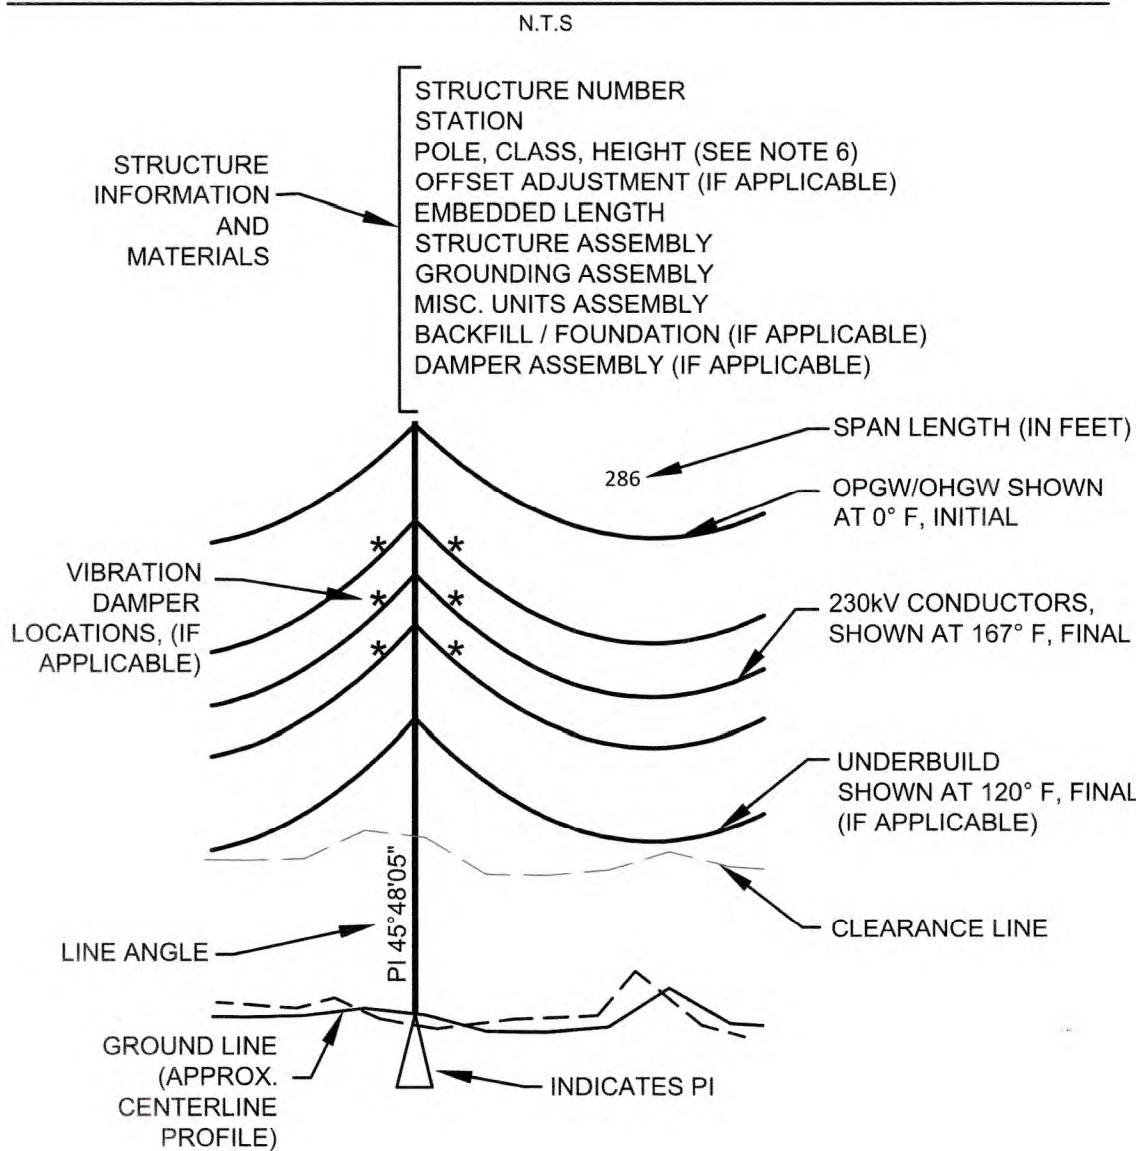

Fayetteville Public Works Commission						
230kV Transmission Line						
Tap to POD 5 Substation						
Sag & Tension / Stringing-Sag Table Index						
TRANSMISSION SECTIONS						May 2026
From Str.	To Str.	Conductor	Ruling Span (ft)	Design Tension Initial, NESC Medium (2508)	Percent of Ultimate Breaking Strength	Table Number
65-2_DUKE	1	(1) 7 No. 6 Alumoweld	105	342	1.5%	1-SS
		(3) 954 AAC Magnolia	105	489	3.0%	2-SS
1	2	(1) 7 No. 6 Alumoweld	175	2124	9.3%	3-SS
		(3) 954 AAC Magnolia	175	4094	25.0%	4-SS
2	3	(1) 7 No. 6 Alumoweld	178	2125	9.3%	5-SS
		(3) 954 AAC Magnolia	178	4082	24.9%	6-SS
3	6	(1) 7 No. 6 Alumoweld	376	2886	12.7%	7-SS
		(3) 954 AAC Magnolia	376	4318	30.0%	8-SS
6	7	(1) 7 No. 6 Alumoweld	213	604	2.7%	9-SS
		(1) 7 No. 6 Alumoweld	233	963	4.2%	10-SS
7	SUB	(3) 954 AAC Magnolia	222	1,518	9.3%	11-SS
		(1) 7 No. 6 Alumoweld	40	240	1.1%	12-SS
		(1) 7 No. 6 Alumoweld	59	437	1.9%	13-SS
		(3) 954 AAC Magnolia	48	637	3.9%	14-SS
SUBSTATION SECTIONS						
SUB	MAST 3	(1) 7 No. 6 Alumoweld	172	600	2.6%	15-SS
SUB	MAST 9	(1) 7 No. 6 Alumoweld	94	600	2.6%	16-SS
SUB	MAST 7	(1) 7 No. 6 Alumoweld	145	600	2.6%	17-SS
SUB	MAST 10	(1) 7 No. 6 Alumoweld	92	600	2.6%	18-SS
MAST 10	MAST 5	(1) 7 No. 6 Alumoweld	110	600	2.6%	19-SS
MAST 9	MAST 6	(1) 7 No. 6 Alumoweld	110	600	2.6%	20-SS
MAST 6	MAST 5	(1) 7 No. 6 Alumoweld	96	600	2.6%	21-SS
MAST 11	MAST 4	(1) 7 No. 6 Alumoweld	104	600	2.6%	22-SS

ROUTE MAP
FAYETTEVILLE, NC

NOTES:

- TRANSMISSION - 230kV INSULATION / 230 kV OPERATION.
PHASE CONDUCTOR - THREE (3) 954 kcmil AAC 37/0 STRANDING (MAGNOLIA) LOADING DISTRICT - MEDIUM (DESIGN) / MEDIUM (ACTUAL).
MAXIMUM CONDUCTOR DESIGN TEMPERATURE - 167°F FINAL.
O.H.G.W. - 7 No. 6 ALUMOWELD.
SEE "STRINGING SAG SUMMARY TABLE" FOR RULING SPAN & NESC MEDIUM CONDUCTOR DESIGN TENSION BY SECTION.
- FOR CONDUCTOR SPACING SEE STANDARD CONSTRUCTION DRAWINGS.
- POLES FOR WHICH CONDUCTOR POSITIONS ARE OTHER THAN THAT SHOWN ON THE TYPICAL CONDUCTOR SEPARATION DRAWINGS HAVE DIMENSIONS INDICATED ON THE PROFILE VIEW. POSITIONS INDICATED ARE FOR CONDUCTOR LOCATIONS MEASURED IN FEET FROM THE TOP OF THE POLE. OFFSETS TO ACCOUNT FOR CROSSARM/INSULATOR MUST BE ACCOUNTED FOR WHEN DRILLING CROSSARM/INSULATOR ATTACHMENT LOCATIONS.
- DANGER!** ALL LINES ARE TO BE CONSIDERED ENERGIZED UNLESS PHYSICALLY CHECKED AND CLEARLY GROUNDED IN ACCORDANCE WITH OWNER'S OR CONTRACTOR'S SAFETY REGULATIONS AND PROCEDURES, WHICHEVER IS MORE STRINGENT.
- PROPERTY LINES SHOWN ARE PLOTTED FROM REFERENCES AND ARE NOT BASED ON AN ACTUAL SURVEY.
- TRANSMISSION POLES ARE SPECIFIED BY HEIGHT AND RUS STANDARD CLASS STEEL TRANSMISSION POLE DESIGNATION (ie: 80 IS 80-foot, S-06.5 RUS STEEL POLE DESIGNATION). SEE RUS BULLETIN 1724E-214.
- STRUCTURES ARE NOT INTENDED TO BE CLIMBABLE UNDER ENERGIZED CONDITIONS.
- SEE TRANSMISSION CONSTRUCTION ASSEMBLY UNITS IN THE PROFILE VIEW (ie OFFSET ADJUST = 5.50) FOR OFFSET DIMENSIONS OF TRANSMISSION STRUCTURES FROM SURVEY CENTERLINE.
- DANGER!!** VERIFY AND LABEL ALL TWO-WAY CIRCUIT FEEDS.
- CONTRACTOR IS RESPONSIBLE FOR LOCATING AND AVOIDING ALL PRIVATE SEWER LINES, SEPTIC FIELDS, ETC.
- ADJOINER AND PROPERTY INFORMATION SHOWN ARE BASED ON A RECOMBINATION SURVEY PROVIDED TO BOOTH BY FAYETTEVILLE PUBLIC WORKS COMMISSION PERFORMED BY 4D SITE SOLUTIONS TITLED "RECOMBINATION SURVEY OF RIDDLE PARCELS & EASEMENT MAP", BEARING A DATE OF NOVEMBER 24, 2021.
- TOPOGRAPHY, EDGE OF PAVEMENT OF MCARTHUR ROAD, EDGE OF CURB AND EDGE PAVEMENT OF SOUTHLAND DRIVE, EXISTING POLES LOCATIONS, EDGE OF GRAVEL EXISTING DRIVE OFF MCARTHUR ROAD, EXISTING HYDRANT AND OTHER ROADSIDE UTILITIES, AND CERTAIN PROPERTY CORNERS, WERE LOCATED ONSITE BY BOOTH & ASSOCIATES DURING FIELD VISITS PERFORMED IN SEPTEMBER 2024 AND OCTOBER 2025.

LEGEND


○	PROPOSED POLE LOCATION
⊗	EXISTING FOREIGN POLE LOCATION
⊙	EXISTING POLE LOCATION - TO BE REMOVED
●	EXISTING POLE LOCATION - TO BE RETAINED
---	PROPOSED TRANSMISSION LINE
---	PROPOSED TRANSMISSION LINE UNDER GROUND/BRIDGE
---	EXISTING OVERHEAD PRIMARY LINE TO BE RETAINED
---	EXISTING PRIMARY TRANSMISSION LINE TO BE REMOVED
---	EXISTING SECONDARY DISTRIBUTION TO BE RETAINED OR TRANSFERRED
---	EXISTING SECONDARY DISTRIBUTION - TO BE REMOVED
---	GROUND CLEARANCE LINE (TRANSMISSION)
---	GROUND CLEARANCE LINE (DISTRIBUTION)
R/W---	N.C.D.O.T. RIGHT-OF-WAY
---	UTILITY EASEMENT
---	EXISTING UTILITY EASEMENT
PL---	PROPERTY LINE (APPROXIMATE)
---	PAVED ROAD
---	PROPOSED PAVED ROAD/ NEW BRIDGE
---	GRAVEL DRIVE
---	UNDERGROUND TELEPHONE
---	UNDERGROUND TELEPHONE CONDUIT
---	UNDERGROUND WATER LINE
---	DITCH CENTERLINE
---	WATER/COAST LINE
---	PROPOSED GUY AND ANCHOR COMBINATION
---	EXISTING GUY AND ANCHOR - TO BE RETAINED
---	GUY AND ANCHOR - TO BE REMOVED
X X	FENCE
SF	SILT FENCE
652	TRANSMISSION STRUCTURE NUMBER
□	TELEPHONE PEDESTAL
□	TELEPHONE HAND HOLE
□	WATER VALVE
△	EXISTING DISTRIBUTION TRANSFORMER
---	- TO BE RETAINED OR TRANSFERRED
---	WETLANDS

NO.	DATE	ENG.	ISSUED FOR CONSTRUCTION	REVISIONS
0	06/25/2026	GSB		

PROJECT NAME:
230KV TAP TO POD 5 T-LINE

DRAWING TITLE:
PLAN & PROFILE

DRAWN BY:	DJD
CHECKED BY:	GSB
APPROVED BY:	GSB
DATE:	06/25/2026
SCALE:	AS NOTED
FILE NUMBER:	1255585PP
SHEET:	COVER

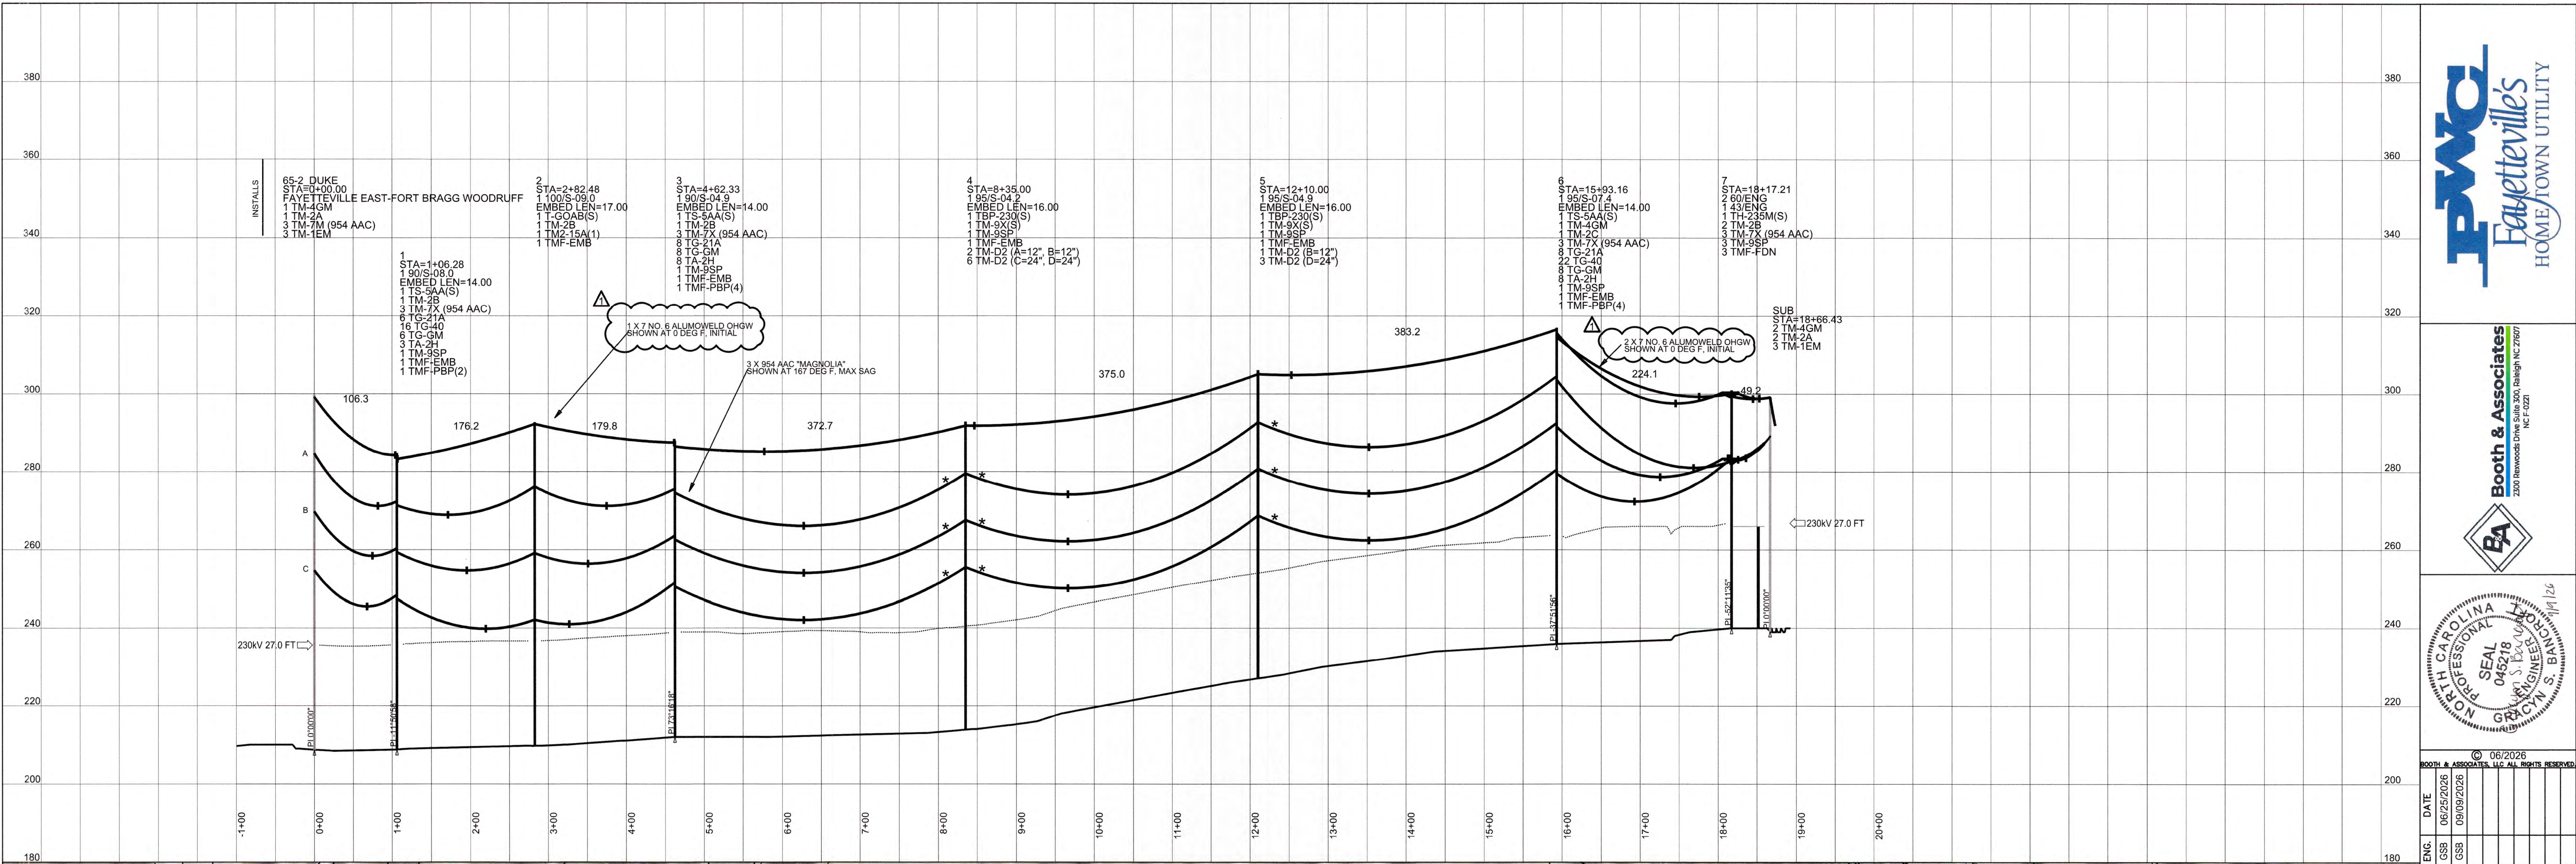

ENG.	DATE	REVISIONS
GSB	06/25/2026	0 ISSUED FOR CONSTRUCTION
GSB	09/09/2026	1 UPDATE LABEL FOR OHGW

PROJECT NAME:	230KV TAP TO POD 5 T-LINE
DRAWING TITLE:	PLAN & PROFILE
DRAWN BY:	DJD
CHECKED BY:	GSB
APPROVED BY:	GSB
DATE:	06/25/2026
SCALE:	AS NOTED
FILE NUMBER:	125585PP
SHEET:	1 OF 1

ATTACHMENT E:



SCOPE OF WORK RIVER ROAD TRANSMISSION PROJECT

Project Overview

This project is for the installation of 1590 AAC with associated hardware on 138 poles, to include the replacement of 109 wood & steel poles to steel poles, along River Road from POD 2 to 401N Aeros Site. This pole line consists of 69kV sub-transmission with a 15kV underbuilt distribution line, Joint Use electric with SREMC, and Joint Use communications. This project will require the removal of existing PWC hardware to include pulling the pole, installing a new steel pole with new hardware, removing the existing 954 and installing 1590, transferring the existing 15kV conductor, transferring underground dips, and transferring joint-use communications. This project would also include flagging and traffic control.

Schedule

This project is expected to be completed in a 9-month period once PWC releases the project. This project will be worked on an NCDOT encroachment.

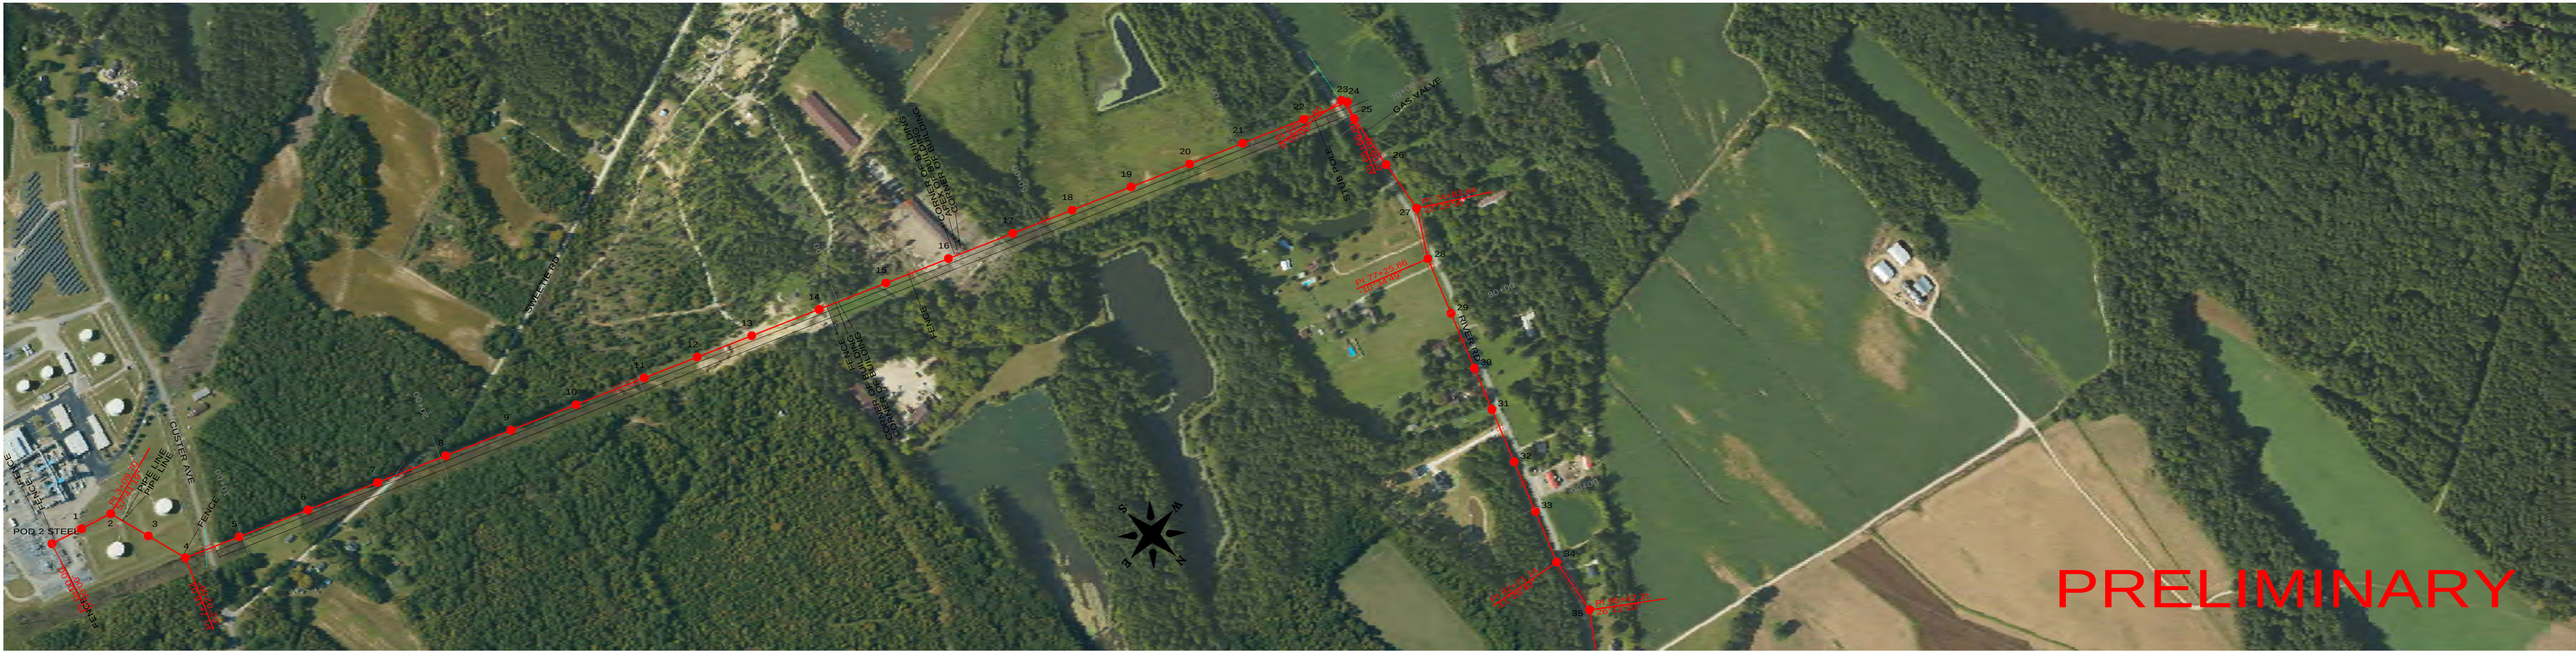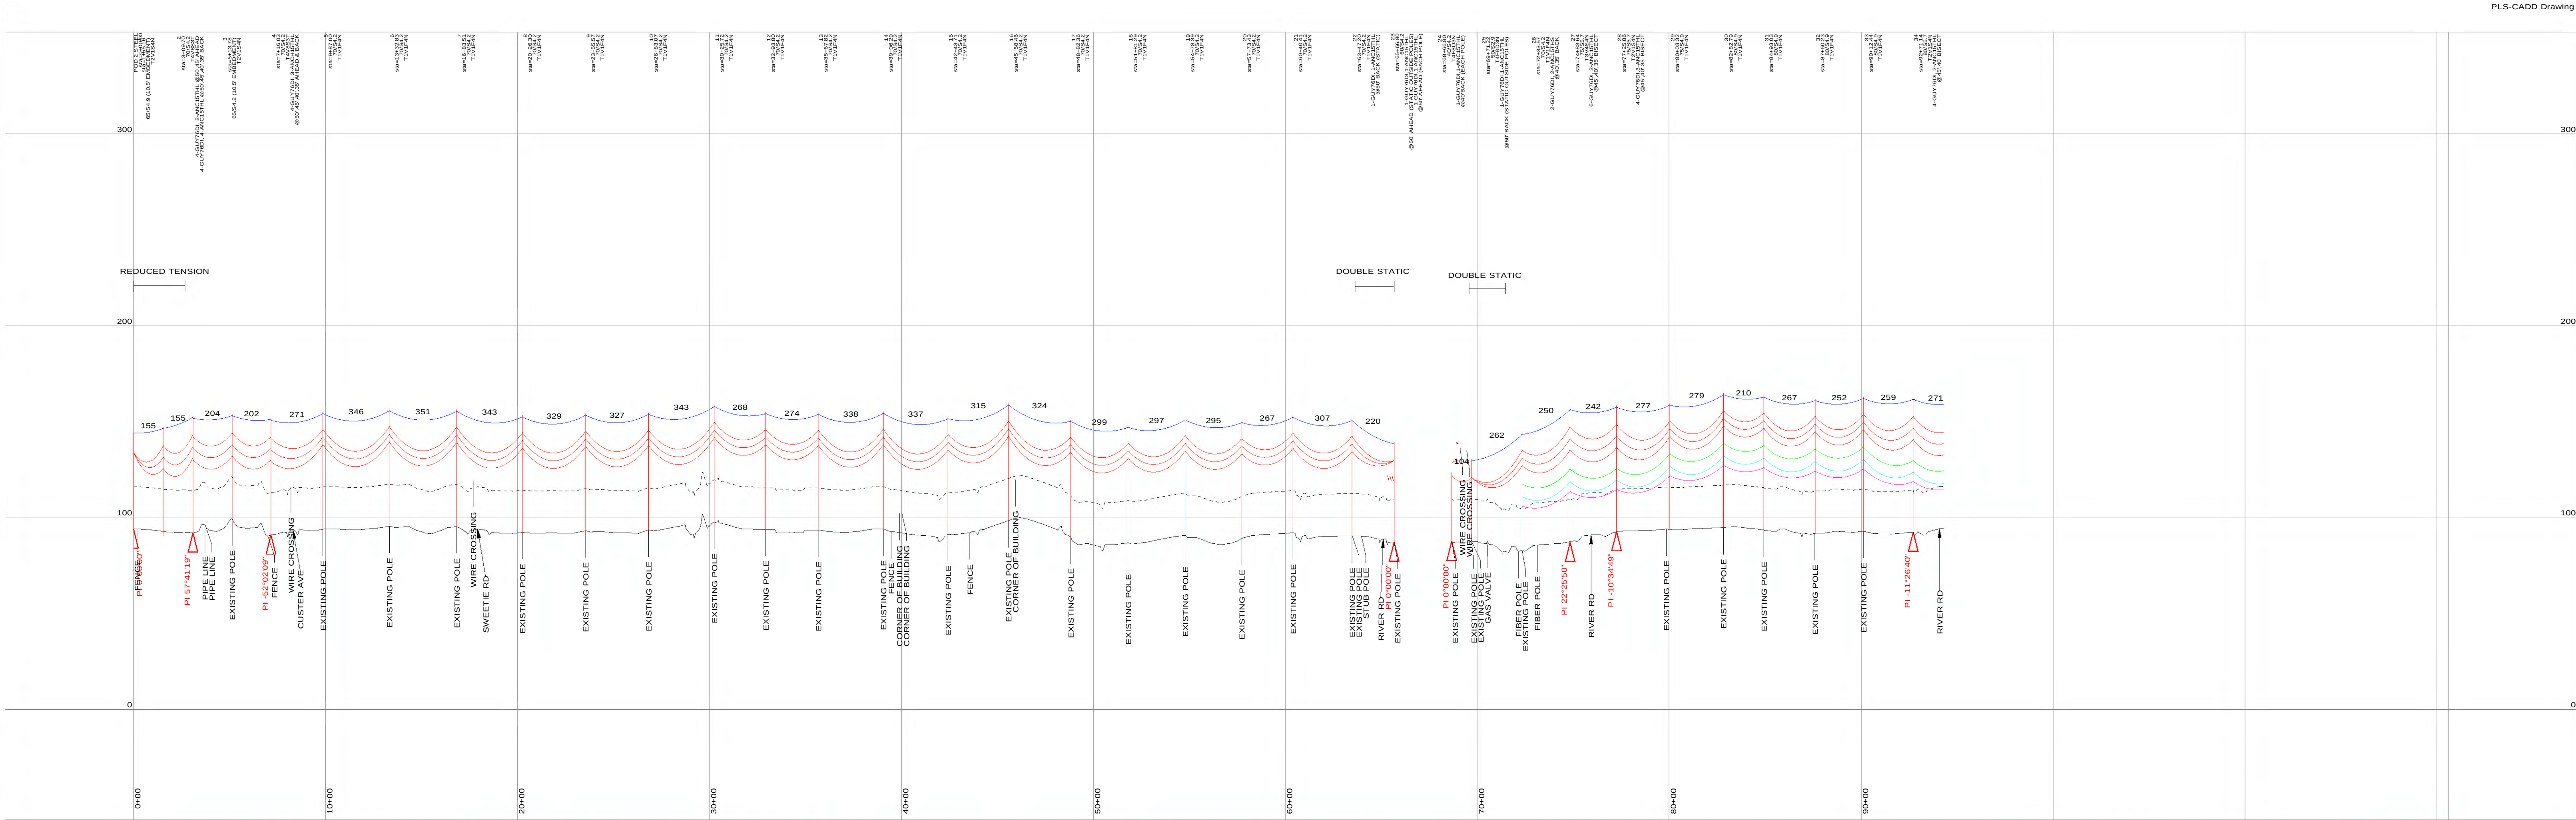


- NOTES:
1. POLE STRENGTH REQUIREMENTS FOR POLES LESS THAN 90' WERE DETERMINED WITH EXTREME WIND LOADING OF 100MPH CONDITIONS ON STEEL POLES AND O.C.F. 1.0.
 2. POLE STRENGTH REQUIREMENTS FOR POLES GREATER THAN 90' WERE DETERMINED WITH EXTREME WIND LOADING OF 100 MPH ON STEEL POLES WITH O.C.F. 1.1.
 3. TRANSMISSION CONDUCTOR: 1500 AAC 19 STRAND, RULING SPAN VARIES, MEDIUM LOADING @ 7.000# INITIAL
 4. DISTRIBUTION CONDUCTOR: 477 AAC 19 STRAND, 250' RULING SPAN, MEDIUM LOADING
 5. NEUTRAL CONDUCTOR: 400 AAC, 250' RULING SPAN, MEDIUM LOADING
 6. SHIELD WIRE: 766 ALUMOWELD, 250' RULING SPAN, MEDIUM LOADING @ 80% OF 60DEG. INITIAL SAG OF TRANSMISSION CONDUCTOR
 7. GUY WIRE: 766 ALUMOWELD, 22,700# ULTIMATE
 8. EMBED ALL STRUCTURES 10W + 2' UNLESS OTHERWISE NOTED.
 9. INSTALL POLE GROUNDS ON ALL POLES.
 10. INSTALL ES-10 GUY MARKERS AT ALL ANCHOR LOCATIONS.
 11. THE NEUTRAL CONDUCTOR ON DISTRIBUTION CROSSARMS SHOULD BE CLEARLY IDENTIFIED EITHER BY INSTALLING A DIFFERENT SIZE (OR COLOR) INSULATOR FOR THE NEUTRAL CONDUCTOR OR BY AFFIXING THE LETTERS "CN" ON BOTH SIDES OF THE CROSSARM, BELOW THE NEUTRAL CONDUCTOR.
 12. INSTALL ROCK BACKFILL AT ALL POLE LOCATIONS



400.0 ft. Horiz. Scale
40.0 ft. Vert. Scale

Date	Revision	By	FAYETTEVILLE PWC	
			POD 2 TO 401 TL	Scale:
				Date: 10/2024
				Drawn By: NCC
				Approved: RAT
				Job No.: 48-004
				Sheet: 1 OF 4
				215 AMES ST. MATTHEWS, NC 28105 TEL: 704.372.6673 N.C. FIRM NO. F-0429

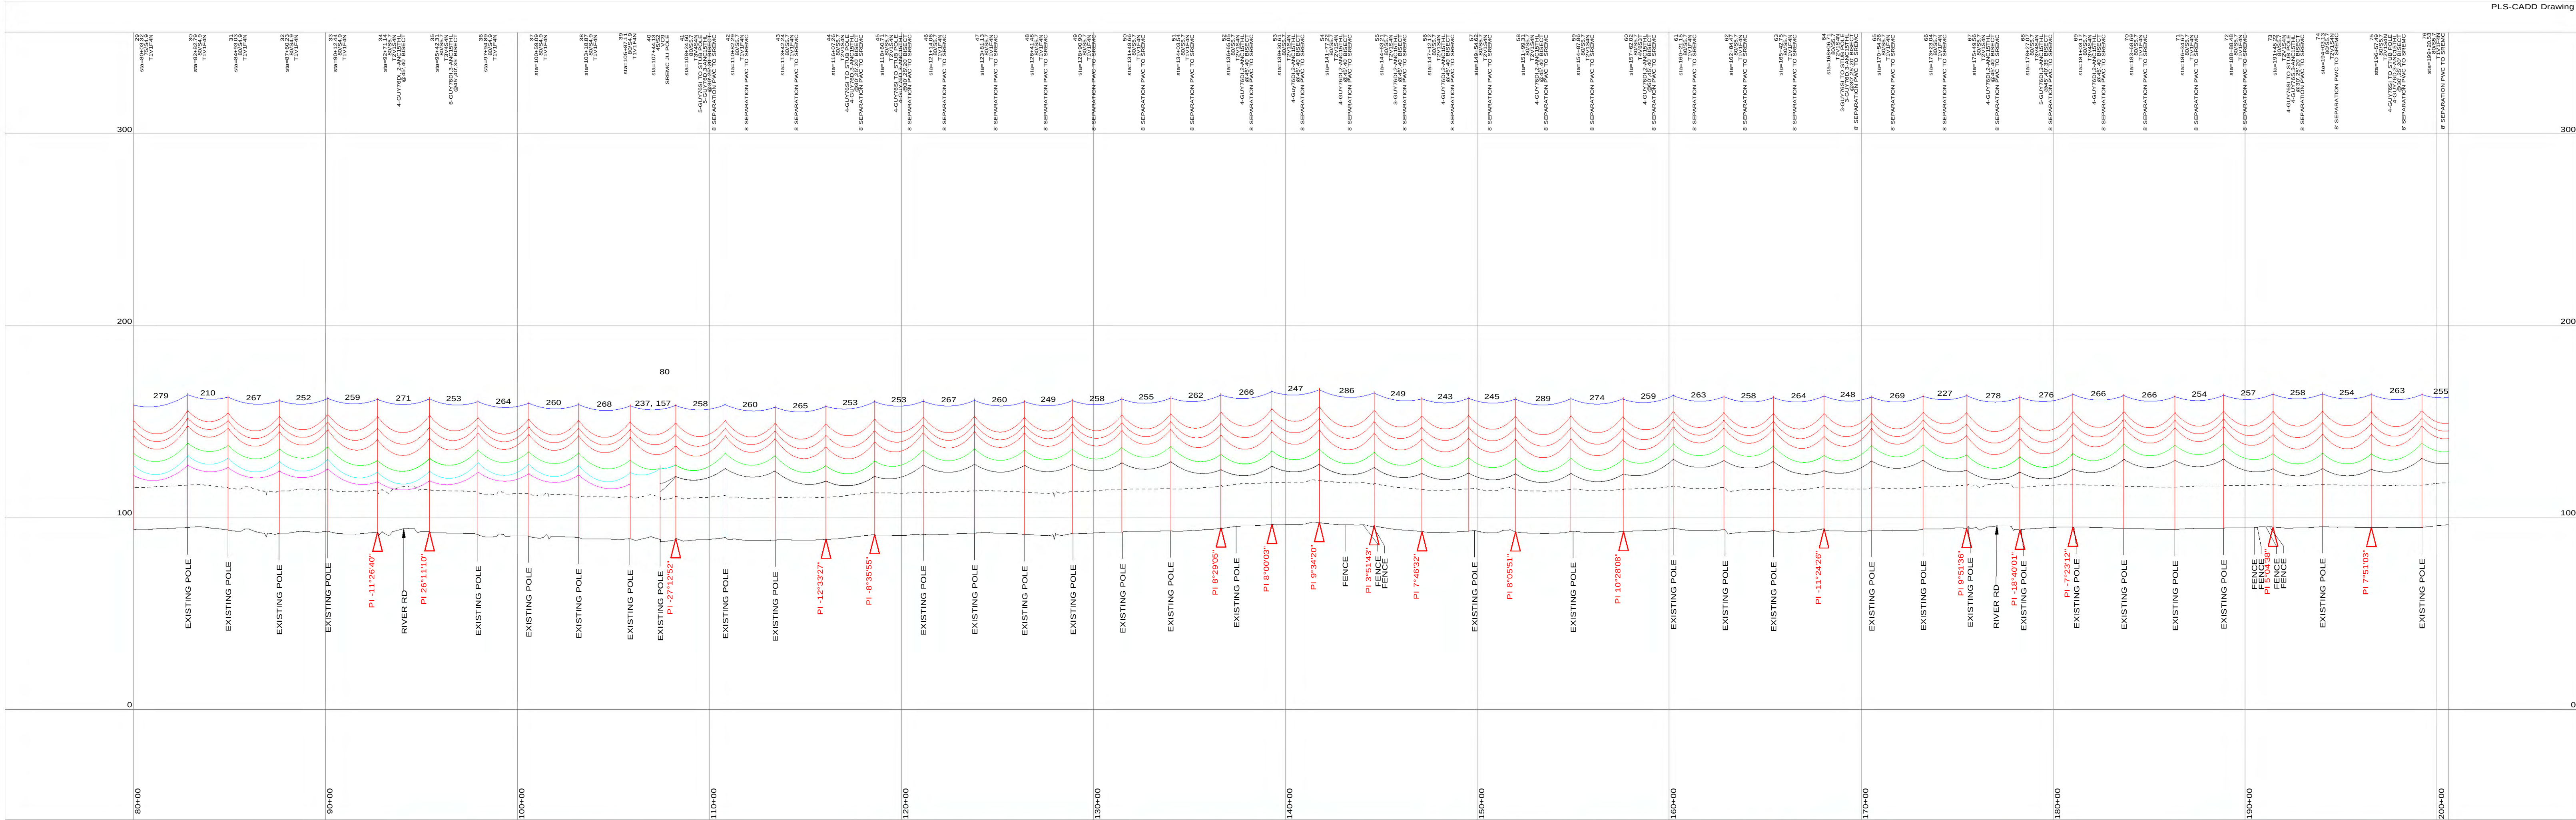

- NOTES:
1. POLE STRENGTH REQUIREMENTS FOR POLES LESS THAN 90' WERE DETERMINED WITH EXTREME WIND LOADING OF 100MPH CONDITIONS ON STEEL POLES AND O.C.F. = 1.0
 2. POLE STRENGTH REQUIREMENTS FOR POLES GREATER THAN 90' WERE DETERMINED WITH EXTREME WIND LOADING OF 100 MPH ON STEEL POLES WITH O.C.F. = 1.1
 3. TRANSMISSION CONDUCTOR: 1500 AAC 10 STRAND, RULING SPAN VARIES, MEDIUM LOADING @ 7,000# INITIAL
 4. DISTRIBUTION CONDUCTOR: 477 AAC 19 STRAND, 250' RULING SPAN, MEDIUM LOADING
 5. NEUTRAL CONDUCTOR: 400 AAC, 250' RULING SPAN, MEDIUM LOADING
 6. SHIELD WIRE: 766 ALUMOWELD, 250' RULING SPAN, MEDIUM LOADING @ 80% OF 60DEG. INITIAL SAG OF TRANSMISSION CONDUCTOR
 7. GUY WIRE: 766 ALUMOWELD, 22,700# ULTIMATE
 8. EMBED ALL STRUCTURES 10W + 2' UNLESS OTHERWISE NOTED.
 9. INSTALL POLE GROUNDS ON ALL POLES
 10. INSTALL E-10 GUY MARKERS AT ALL ANCHOR LOCATIONS.
 11. THE NEUTRAL CONDUCTOR ON DISTRIBUTION CROSSARMS SHOULD BE CLEARLY IDENTIFIED EITHER BY INSTALLING A DIFFERENT SIZE (OR COLOR) INSULATOR FOR THE NEUTRAL CONDUCTOR OR BY AFFIXING THE LETTERS "CN" ON BOTH SIDES OF THE CROSSARM, BELOW THE NEUTRAL CONDUCTOR.
 12. INSTALL ROCK BACKFILL AT ALL POLE LOCATIONS




400.0 ft. Horiz. Scale
40.0 ft. Vert. Scale



Date	Revision	By	FAYETTEVILLE PWC	
			POD 2 TO 401 TL	
			 ECE ECEPOWER.COM	Scale:
				Date: 10/2024
				Drawn By: NCC
				Approved: RAT
			215 AMES ST. MATTHEWS, NC 28105 TEL: 704.372.6673 N.C. FIRM NO. F-0429	
			Job No.: 48-004	
			Sheet : 2 OF 4	




- 
- PWC**
Fayetteville's
HOMETOWN UTILITY



Date	Revision	By	FAYETTEVILLE PWC	
			POD 2 TO 401 TL	Scale:
				Date: 10/2024
				Drawn By:NCC
				Approved: RAT
				Job No.: 48-004
				Sheet : 3 OF 4

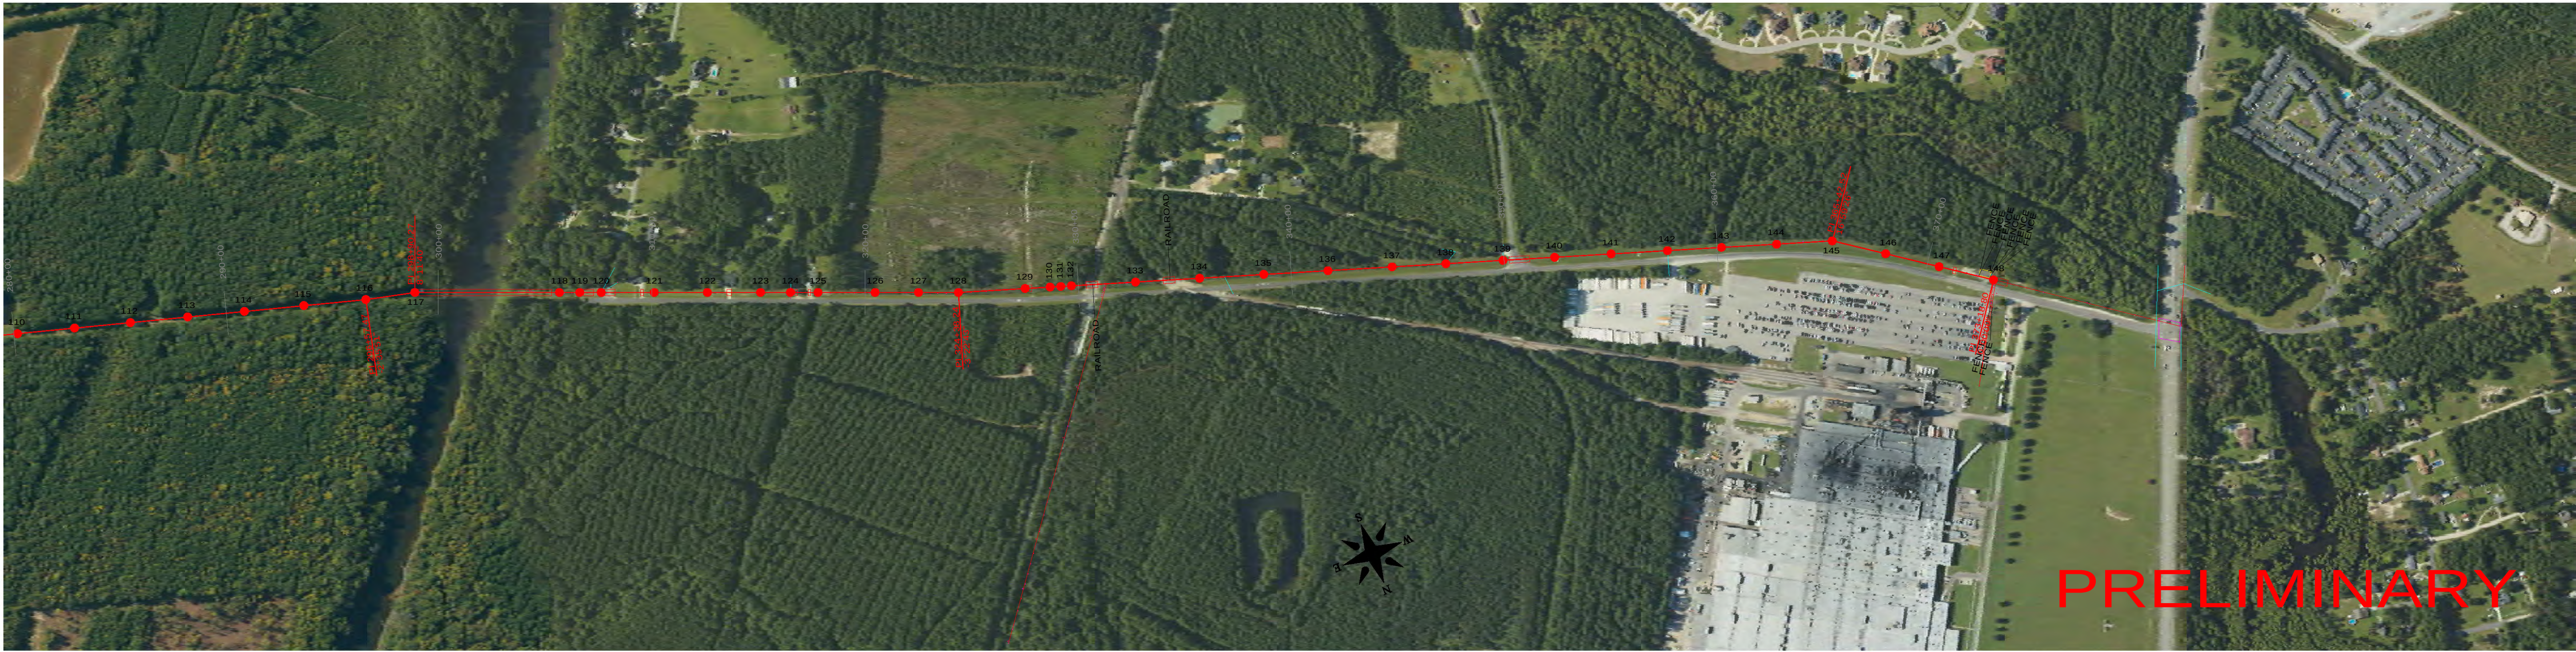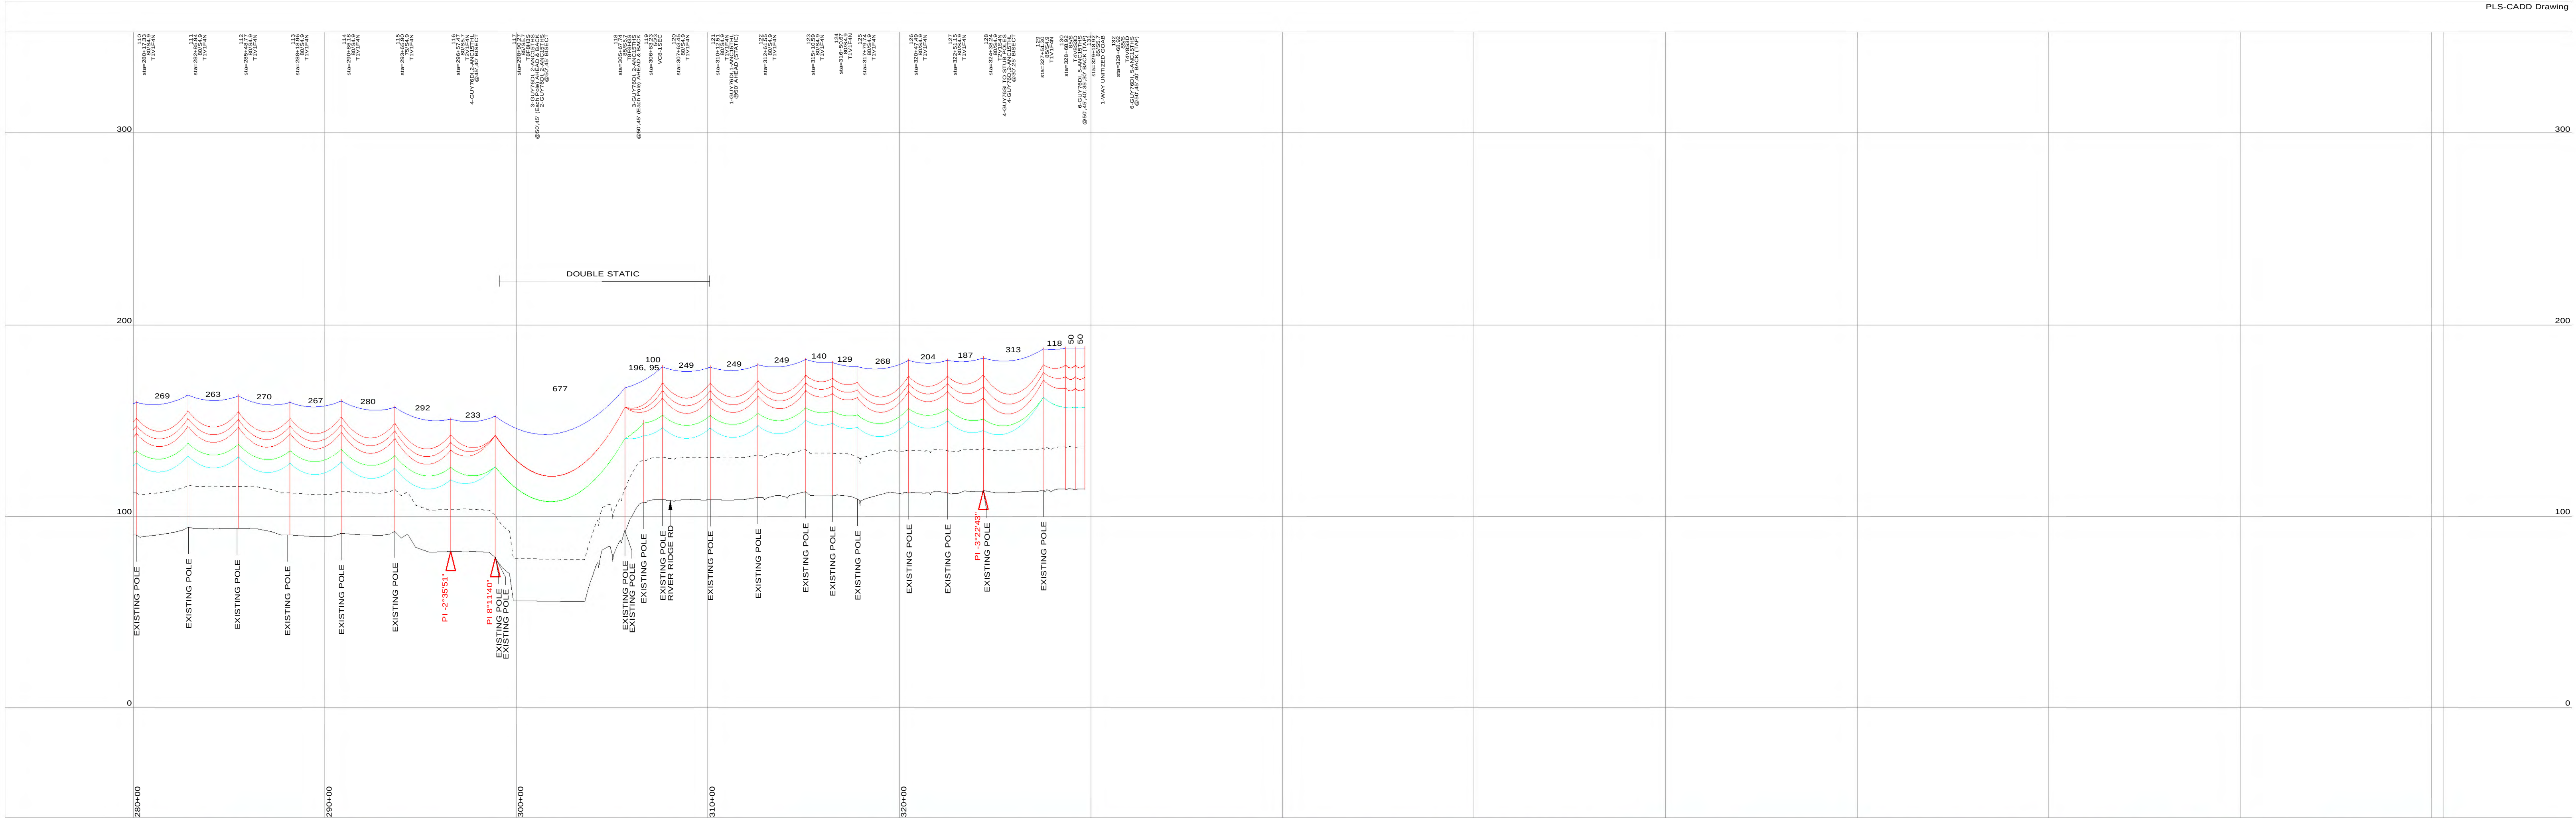

- NOTES:
1. POLE STRENGTH REQUIREMENTS FOR POLES LESS THAN 90' WERE DETERMINED WITH EXTREME WIND LOADING OF 100MPH CONDITIONS ON STEEL POLES AND O.C.F. 1.0.
 2. POLE STRENGTH REQUIREMENTS FOR POLES GREATER THAN 90' WERE DETERMINED WITH EXTREME WIND LOADING OF 100 MPH ON STEEL POLES WITH O.C.F. 1.1.
 3. TRANSMISSION CONDUCTOR: 1500 AAC 61 STRAND, RULING SPAN VARIES, MEDIUM LOADING @ 7.000W/ INITIAL.
 4. DISTRIBUTION CONDUCTOR: 477 AAC 19 STRAND, 250' RULING SPAN, MEDIUM LOADING.
 5. NEUTRAL CONDUCTOR: 400 AAC, 250' RULING SPAN, MEDIUM LOADING.
 6. SHIELD WIRE: 766 ALUMOWELD, 250' RULING SPAN, MEDIUM LOADING @ 80% OF 60DEG. INITIAL SAG OF TRANSMISSION CONDUCTOR.
 7. GUY WIRE: 766 ALUMOWELD, 22,700W ULTIMATE.
 8. EMBED ALL STRUCTURES 10W +/- 2' UNLESS OTHERWISE NOTED.
 9. INSTALL POLE GROUNDS ON ALL POLES.
 10. INSTALL 1/2" GUY MARKERS AT ALL ANCHOR LOCATIONS.
 11. THE NEUTRAL CONDUCTOR ON DISTRIBUTION CROSSARMS SHOULD BE CLEARLY IDENTIFIED EITHER BY INSTALLING A DIFFERENT SIZE (OR COLOR) INSULATOR FOR THE NEUTRAL CONDUCTOR OR BY AFFIXING THE LETTERS "CN" ON BOTH SIDES OF THE CROSSARM, BELOW THE NEUTRAL CONDUCTOR.
 12. INSTALL ROCK BACKFILL AT ALL POLE LOCATIONS.



Date	Revision	By	FAYETTEVILLE PWC	
			POD 2 TO 401 TL	
			Scale:	
			Date: 10/2024	
			Drawn By:NCC	
			Approved: RAT	
			Job No.: 48-004	
			Sheet : 4 OF 4	



215 AMES ST.
MATTHEWS, NC 28105
TEL: 704.372.6673
N.C. FIRM NO. F-0429

	Pole	Trans. Structure	Dist. Structure	Notes
1	75 4.2	T2V1S4N		Cut 10' to 65'
2	75 4.2	T4V8S3T		Cut 5' to 70'
3	75 4.2	T2V1S4N		Cut 10' to 65'
4	75 4.9	T4V8S3T		Cut 5' to 70'
5				POLE TO REMAIN
6				POLE TO REMAIN
7				POLE TO REMAIN
8				POLE TO REMAIN
9				POLE TO REMAIN
10				POLE TO REMAIN
11				POLE TO REMAIN
12				POLE TO REMAIN
13				POLE TO REMAIN
14				POLE TO REMAIN
15				POLE TO REMAIN
16				POLE TO REMAIN
17				POLE TO REMAIN
18				POLE TO REMAIN
19				POLE TO REMAIN
20				POLE TO REMAIN
21				POLE TO REMAIN
22	75 4.2	T1V1F4N		Cut 5' to 70'
23	60 4.2	T4F8D3N		3 POLES - COND EACH POLE
24	40 4.2	T4F8D3N		3 POLES - COND EACH POLE
25	40 4.2	T4F8D3N		3 POLES - COND EACH POLE
26	75 4.2	T1V1F4N		Cut 5' to 70'
27	75 5.7	T3V4S4N		
28	75 5.7	T2V1S4N	VC2-1SFBG	
29	75 4.9	T1V1F4N	VC2-1SFBG	
30	80 4.9	T1V1F4N	VC2-1SFBG	
31	80 4.9	T1V1F4N	VC2-1SFBG	
32	80 4.9	T1V1F4N	VC2-1SFBG	
33	80 4.9	T1V1F4N	VC2-1SFBG	
34	80 4.9	T2V1S4N	VC2-1SFBG	
35	80 4.9	T3V4S4N	DBL DEADEND	
36	80 4.9	T1V1F4N	VC2-1SFBG	
37	80 4.9	T1V1F4N	VC2-1SFBG	
38	80 4.9	T1V1F4N	VC2-1SFBG	
39	80 4.9	T1V1F4N	VC2-1SFBG	
40	WOOD 45C3		DBL DEADEND	
41	80 5.7	T4V8S3T	DBL DEADEND	SREMC JOINT USE
42	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE

43	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
44	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
45	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
46	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
47	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
48	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
49	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
50	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
51	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
52	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
53	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
54	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
55	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
56	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
57	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
58	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
59	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
60	80 5.7	T4V8S3T	VC9-2SFBG	SREMC JOINT USE
61	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
62	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
63	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
64	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
65	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
66	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
67	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
68	80 5.7	T3V4S4N	VC9-2SFBG	SREMC JOINT USE
69	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
70	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
71	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
72	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
73	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
74	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
75	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
76	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
77	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
78	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
79	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
80	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
81	80 5.7	T4V8S3T	VC9-2SFBG	SREMC JOINT USE
82	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
83	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
84	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
85	80 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
86	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE

87	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
88	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
89	80 5.7	T1V1F4N	DBL DEADEND	SREMC JOINT USE
90	80 5.7	T1V1F4N	DBL DEADEND	SREMC JOINT USE
91	80 5.7	T1V1F4N	DBL DEADEND	SREMC JOINT USE
92	85 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
93	85 5.7	T2V1S4N	VC9-2SFBG	SREMC JOINT USE
94	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
95	80 5.7	T4V8S3T	VC9-2SFBG	SREMC JOINT USE
96	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
97	80 5.7	T2V1F4N	VC9-2SFBG	SREMC JOINT USE
98	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
99	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
100	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
101	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
102	80 5.7	T1V1F4N	VC9-2SFBG	SREMC JOINT USE
103	80 5.7	T4V8S3T	DBL DEADEND	
104	80 4.9	T1V1F4N	VC2-1SFBG	
105	80 4.9	T1V1F4N	VC2-1SFBG	
106	80 4.9	T2V1S4N	VC2-1SFBG	
107	80 4.9	T1V1F4N	VC2-1SFBG	
108	80 4.9	T1V1F4N	VC2-1SFBG	
109	80 4.9	T1V1F4N	VC2-1SFBG	
110	80 4.9	T1V1F4N	VC2-1SFBG	
111	80 4.9	T1V1F4N	VC2-1SFBG	
112	80 4.9	T1V1F4N	VC2-1SFBG	
113	80 4.9	T1V1F4N	VC2-1SFBG	
114	80 4.9	T1V1F4N	VC2-1SFBG	
115	80 4.9	T1V1F4N	VC2-1SFBG	
116	80 5.7	T2V1S4N	VC2-1SFBG	
117				POLE TO REMAIN
118				POLE TO REMAIN
119		WOOD 50C3	VC8-1SEC	
120				POLE TO REMAIN
121				POLE TO REMAIN
122				POLE TO REMAIN
123				POLE TO REMAIN
124				POLE TO REMAIN
125				POLE TO REMAIN
126				POLE TO REMAIN
127				POLE TO REMAIN
128				POLE TO REMAIN
129				POLE TO REMAIN
130	85 5.7	T4V8S3D	VC9-2SFBG	

131	80 5.7	T4V8S3N	VC9-2SFBG	
132	85 5.7	T4V8S3T	VC9-2SFBG	

W.O. #

JOB # 1

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401 NORTH TL

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.



Staked by

ECE

Started Comp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
1	Install	3	155	1590 AAC	1	PS65042	1	T2V1S4N	1	GND210S											10.5' EMBEDMENT
	Install								1	GNDPS2											CUT TO 65 FT OR SET 9 FT DEEPER
	Install																				
	Install																				
2	Install	3	155	1590 AAC	1	PS75042	1	T4V8S3T	1	GND210S	8	GUY76DI	6	ANC15THL							@50', 45' AHEAD
	Install								1	GNDPS2											@50', 45', 40', 35' BACK
	Install																				CUT TO 70 FT OR SET 4.5 FT DEEPER
	Install																				
3	Install	3	204	1590 AAC	1	PS75042	1	T2V1S4N	1	GND210S											10.5' EMBEDMENT
	Install								1	GNDPS2											CUT TO 65 FT OR SET 9 FT DEEPER
	Install																				
	Install																				
4	Install	3	202	1590 AAC	1	PS75049	1	T4V8S3T	1	GND210S	8	GUY76DI	8	ANC15THL							@50', 45', 40', 35' AHEAD & BACK
	Install								1	GNDPS2											CUT TO 70 FT OR SET 4.5 FT DEEPER
	Install																				
	Install																				
5	Install	3	271	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
6	Install	3	346	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401 NORTH TL**

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by ECE

Started Comp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
7	Install	3	351	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
8	Install	3	343	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
9	Install	3	329	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
10	Install	3	328	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
11	Install	3	343	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
12	Install	3	268	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401 NORTH TL**

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by ECE

Started Comp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
13	Install	3	274	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
14	Install	3	338	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
15	Install	3	337	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
16	Install	3	315	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
17	Install	3	324	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
18	Install	3	299	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401 NORTH TL**

Distribution

Transmission

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked byECE

StartedComp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
19	Install	3	297	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
20	Install	3	295	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
21	Install	3	267	1590 AAC			1	T1V1F4N													EXISTING POLE TO REMAIN
	Install																				
	Install																				
	Install																				
22	Install	1	307	7#6 ALUMOWELD	1	PS75042	1	T1V1F4N	1	GND210S	1	GUY76DI	1	ANC15THL					1	CAGD7#6B	@50' BACK (STATIC)
	Install	3	307	1590 AAC					1	GNDPS2											CUT TO 70 FT OR SET 4.5 FT DEEPER
	Install																				
	Install																				
23	Install	3	220	1590 AAC	3	PS75042	1	T4F8D3N	1	GND210S	5	GUY76DI	3	ANC15THL							@50' AHEAD (STATIC OUTSIDE POLES)
	Install								1	GNDPS2											@50' AHEAD (COND. EACH POLE)
	Install																				CUT TO 60 FT OR SET 13.5 FT DEEPER
	Install																				
24	Install				3	PS70042	1	T4F8D3N	1	GND210S	3	GUY76DI	3	ANC15THS							@50' BACK (COND. EACH POLE)
	Install								1	GNDPS2											(6) 1590 COMPRESSION CONNECTORS
	Install																				CUT TO 40' OR SET 27' DEEPER
	Install																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401 NORTH TL**

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE
PUBLIC WORKS COMMISSION
FAYETTEVILLE, NC
Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by _____ ECE
Started _____ Comp. _____
Comp. By **x**
Date Posted to Maps _____

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
25	Install	3	104	1590 AAC	3	PS75042	1	T4F8D3N	1	GND210S	5	GUY76DI	3	ANC15THS					2	CAGD7#6B	@50' BACK (COND. EACH POLE)
	Install								1	GNDPS2											CUT TO 50' OR SET 22.5' DEEPER
	Install																				
	Install																				
26	Install	2	262	7#6 ALUMOWELD	1	PS75042	1	T1V1F4N	1	GND210S	2	GUY76DI	2	ANC15THL					1	XAS10A	3-PH. DIP POLE
	Install	3	262	1590 AAC					1	GNDPS2									3	CALD477	@40', 35' BACK
	Install	3	630	750MCM															1	CALD040	CUT TO 70 FT OR SET 4.5 FT DEEPER
	Install																		1	BKTCOLA3	
	Install																		3	SW6LTD4	
	Install																		3	TERM750C	
	Install																		3	LA10RP	
	Install																		3	STRPBOLT	
	Install																		3	750EXTRADIP30	
	Install																		1	DIP630P	
	Install																		1	DIP630P	
27	Install	3	250	1590 AAC	1	PS75057	1	T3V4S4N	1	GND210S	4	GUY76DI	2	ANC15THL					2	XAF10	@45', 40', 35'BISECT
	Install								1	GNDPS2	2	GUY76DI	1	ANC15THL					6	IDDEC35	
	Install																		6	IPIA35	
	Install																		6	CALD477	
	Install																		2	CALD040	
	Install																		3	J477AC	
	Install																		1	J040AC	
28	Install	3	242	1590 AAC	1	PS75057	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL					2	BKTCOLA1	@45', 40', 35' BISECT
	Install						1	VC2-1SFBG	1	GNDPS2	1	GUY76DI	1	ANC15THL							V-PHASE TAP
	Install																				
	Install																				
	Install																				
	Install																				
29	Install	3	277	1590 AAC	1	PS75049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				

Page 5 of 24

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401 NORTH TL

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
30	Install	3	279	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S	1	GUY76DI	1	ANC15THS							@25' BACK (A5-2)
	Install						1	VC2-1SFBG	1	GNDPS2											TRANSFORMER ON LINE
	Install																				
	Install																				
	Install																				
31	Install	3	210	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											SINGLE-PHASE TAP
	Install						1	VC2-1SFBG	1	GNDPS2											UG PRI. DIP
	Install						1	VA5-2EC													
	Install																				
	Install																				
	Install																				
32	Install	3	267	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
	Install																				
33	Install	3	252	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
34	Install	3	259	1590 AAC	1	PS80049	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC2-1SFBG	1	GNDPS2	1	GUY76DI									
	Install																				
	Install																				

Page 6 of 24

W.O. #

JOB # 1

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.



Staked by

ECE

Started

Comp.

Comp. By

X

Date Posted to Maps

Staking Sheet

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
35	Install	3	271	1590 AAC	1	PS80049	1	T3V4S4N	1	GND210S	4	GUY76DI	2	ANC15THL					2	XAF10	@45', 40', 35' BISECT
	Install								1	GNDPS2	2	GUY76DI	1	ANC15THL					6	IDEC35B	
	Install																		6	CALD477	
	Install																		2	CALD040	
	Install																		1	J040AC	
	Install																		3	J477AC	
	Install																		6	IPIA25	
	Install																		1	2/0CUEXTRA8FT	
	Install																				
	Install																				
	Install																				
	Install																				
36	Install	3	253	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
37	Install	3	264	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install							VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
	Install																				
38	Install	3	260	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
39	Install	3	268	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401 NORTH TL

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
40	Install				1	PW45C3			1	GND210S									2	XAF10	Will this whole pole be transferred
	Install																		6	CALD477	
	Install																		2	CALD040	
	Install																		3	IDDEC35B	
	Install																		3	J477AC	
	Install																		1	J040AC	
	Install																		6	IPIA25	
41	Install		3	237	1	PS80057	1	T4V8S3T	2	GND210S	5	GUY76SI	3	ANC15THL					2	XAF10	SPAN GUYS TO STUB POLE
	Install				1	PW45C3			1	GNDPS2	5	GUY76D							6	IDDEC35	@30', 25', 20' BISECT
	Install																		6	IPIA25	8' SEPARATION PWC TO SREMC
	Install																		6	CALD477	
	Install																		2	CALD040	
	Install																		3	J477AC	
	Install																		1	J040AC	
42	Install		3	258	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
43	Install		3	260	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
44	Install		3	265	1	PS80057	1	T2V1S4N	2	GND210S	4	GUY76SI	3	ANC15THL							SPAN GUYS TO STUB POLE
	Install				1	PW45C3	1	VC9-2SFBG	1	GNDPS2	4	GUY76D									@30', 25', 20' BISECT
	Install																				8' SEPARATION PWC TO SREMC
	Install																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401 NORTH TL

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
45	Install	3	253	1590 AAC	1	PS80057	1	T2V1S4N	2	GND210S	4	GUY76SI	3	ANC15THL							SPAN GUYS TO STUB POLE
	Install				1	PW45C3	1	VC9-2SFBG	1	GNDPS2	4	GUY76D									@30', 25', 20' BISECT
	Install						1	VA5-2EC													8' SEPARATION PWC TO SREMC
	Install																				
46	Install	3	253	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
47	Install	3	267	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
48	Install	3	260	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
49	Install	3	249	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
50	Install	3	258	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401 NORTH TL

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started Comp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
51	Install	3	255	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
52	Install	3	262	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2	1	GUY76DI									8' SEPARATION PWC TO SREMC
	Install																				
	Install																				
53	Install	3	266	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2	1	GUY76DI									8' SEPARATION PWC TO SREMC
	Install																				
	Install																				
54	Install	3	247	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2	1	GUY38DI									8' SEPARATION PWC TO SREMC
	Install																				
	Install																				
55	Install	3	286	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2	1	GUY76DI									8' SEPARATION PWC TO SREMC
	Install																				
	Install																				
56	Install	3	249	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2	1	GUY76DI									8' SEPARATION PWC TO SREMC
	Install																				
	Install																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401 NORTH TL**

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked byECE

StartedComp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
57	Install	3	243	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
58	Install	3	245	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2	1	GUY76DI									8' SEPARATION PWC TO SREMC
	Install																				
	Install																				
59	Install	3	289	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
60	Install	3	274	1590 AAC	1	PS80057	1	T4V8S3T	1	GND210S	3	GUY76DI	2	ANC15THS							@50', 45' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2	1	GUY76SI									
	Install																				
	Install																				
61	Install	3	258	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
62	Install	3	264	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401 NORTH TL

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started Comp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
63	Install	3	258	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
64	Install	3	264	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	4	GUY76SI	2	ANC15THL							SPAN GUYS TO STUB POLE
	Install				1	PW45C3	1	VC9-2SFBG	1	GNDPS2	4	GUY76D									@30, 25' BISECT
	Install																				8' SEPARATION PWC TO SREMC
	Install																				
65	Install	3	248	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
66	Install	3	269	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
67	Install	3	227	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2	1	GUY76DI									8' SEPARATION PWC TO SREMC
	Install																				
	Install																				
68	Install	3	278	1590 AAC	1	PS80057	1	T3V4S4N	1	GND210S	4	GUY76DI	3	ANC15THL							@45', 40', 35' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2	1	GUY76DI									8' SEPARATION PWC TO SREMC
	Install																				
	Install																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401 NORTH TL

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
69	Install	3	276	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2	1	GUY76DI									8' SEPARATION PWC TO SREMC
	Install																				
	Install																				
70	Install	3	266	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
71	Install	3	266	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
72	Install	3	254	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
73	Install	3	257	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	4	GUY76SI	2	ANC15THL							SPAN GUYS TO STUB POLE
	Install				1	PW45C3	1	VC9-2SFBG	1	GNDPS2	4	GUY76D									@30', 25' BISECT
	Install																				8' SEPARATION PWC TO SREMC
	Install																				
74	Install	3	258	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				

Page 13 of 24

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401 NORTH TL**

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by ECE

Started Comp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
75	Install	3	254	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	4	GUY76SI	2	ANC15THL							SPAN GUYS TO STUB POLE
	Install				1	PW45C3	1	VC9-2SFBG	1	GNDPS2	4	GUY76D									@30', 25' BISECT
	Install																				8' SEPARATION PWC TO SREMC
	Install																				
76	Install	3	263	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
77	Install	3	255	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
78	Install	3	258	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
79	Install	3	262	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
80	Install	3	255	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2											8' SEPARATION PWC TO SREMC
	Install																				
	Install																				

W.O. #

JOB # 1

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.



Staked by

ECE

Started

Comp.

Comp. By

x

Date Posted to Maps

Job Description

POD 2 TO 401 NORTH TL

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
81	Install	3	281	1590 AAC	1	PS80057	1	T4V8S3T	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC9-2SFBG	1	GNDPS2	1	GUY76DI									8' SEPARATION PWC TO SREMC
	Install																				
	Install																				
82	Install	3	259	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
83	Install	3	288	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
84	Install	3	277	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	4	GUY76SI	3	ANC15THL					2	XAF10	SPAN GUYS TO STUB POLE
	Install				1	45' Stub Pole	1	VC9-2SFBG	1	GNDPS2	4	GUY76D						3	IDDEC35	@30', 25',20' BISECT	
	Install																	6	IPIA25	8' SEPARATION PWC TO SREMC	
	Install																	6	CALD477		
	Install																	2	CALD040		
	Install																	3	J477AC		
	Install																	1	J040AC		
85	Install	3	289	1590 AAC	1	PS80057	1	T2V1F4N	1	GND210S	3	GUY76SI	2	ANC15THL							SPAN GUYS TO STUB POLE
	Install				1	45' Stub Pole	1	VC9-2SFBG	1	GNDPS2	3	GUY76D									@30', 25' BISECT
	Install																				8' SEPARATION PWC TO SREMC
	Install																				
86	Install	3	154	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401 NORTH TL

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
87	Install	3	206	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
88	Install	3	175	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S									1	STRPBOLT	8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2									1	SW1COLB	
	Install						1	VA5-2EC											1	BKTCOLA1	
	Install																		1	2/0CUEXTRA8FT	
89	Install	3	243	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S	2	GUY76DI	2	ANC15THL					2	XAF10	@40', 35' BACK (DIST.)
	Install								1	GNDPS2									3	IDDEC35B	8' SEPARATION PWC TO SREMC
	Install																		6	CALD477	
	Install																		2	CALD002	
	Install																		3	J477AC	
	Install																		1	J040AC	
	Install																		6	IPIA35	
90	Install	3	277	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S	2	GUY76DI	2	ANC15THL					2	XAF10	@40', 35' BACK (DIST.)
	Install								1	GNDPS2									3	IDDEC35B	8' SEPARATION PWC TO SREMC
	Install																		6	CALD477	
	Install																		2	CALD040	
	Install																		3	J477AC	
	Install																		1	J040AC	
	Install																		6	IPIA35	
91	Install	3	277	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S									2	XAF10	@40', 35' AHEAD (C8)
	Install								1	GNDPS2									3	IDDEC35B	8' SEPARATION PWC TO SREMC
	Install																		6	CALD477	
	Install																		2	CALD040	
	Install																		3	J477AC	
	Install																		1	J040AC	
	Install																		6	IPIA35	

Page 16 of 24

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401 NORTH TL**

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by ECE

Started Comp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
92	Install	3	276	1590 AAC	1	PS85057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
93	Install	3	298	1590 AAC	1	PS85057	1	T2V1S4N	1	GND210S	3	GUY76SI	2	ANC15THL							SPAN GUYS TO STUB POLE
	Install				1	PW45C3	1	VC9-2SFBG	1	GNDPS2	3	GUY76D									@30', 25' BISECT
	Install																				8' SEPARATION PWC TO SREMC
	Install																				
94	Install	3	219	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
95	Install	3	217	1590 AAC	1	PS80057	1	T4V8S3T	1	GND210S	4	GUY76SI	3	ANC15THS							SPAN GUYS TO STUB POLE
	Install				1	PW45C3	1	VC9-2SFBG	1	GNDPS2	4	GUY76D									@30', 25', 20' BISECT
	Install																				8' SEPARATION PWC TO SREMC
	Install																				
96	Install	3	216	1590 AAC	1	PS80057	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
97	Install	3	189	1590 AAC	1	PS80057	1	T2V1F4N	1	GND210S	3	GUY76SI	2	ANC15THL							SPAN GUYS TO STUB POLE
	Install				1	PW45C3	1	VC9-2SFBG	1	GNDPS2	3	GUY76D									@30', 25' BISECT
	Install																				8' SEPARATION PWC TO SREMC
	Install																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Distribution

Transmission

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked byECE

StartedComp.

Comp. By x

Date Posted to Maps

Job Description

POD 2 TO 401 NORTH TL

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
98	Install	3	224	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
99	Install	3	220	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
100	Install	3	214	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
101	Install	3	206	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
102	Install	3	193	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											8' SEPARATION PWC TO SREMC
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401 NORTH TL

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.



Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
103	Install	3	256	1590 AAC	1	PS80057	1	T4V8S3T	1	GND210S	6	GUY76SI	3	ANC15THL					2	XAS10A	OH GUYS TO STUB POLE
	Install								1	GNDPS2	6	GUY76DI	5	ANC15THL					6	IDEC35B	@40', 35', 30' AHEAD
	Install										6	GUY76D							6	CALD477	@50', 45', 40', 35', 30' BACK
	Install																		2	CALD040	
	Install																		3	J477AC	
	Install																		1	J040AC	
	Install																		3	IPIA35	
104	Install	3	197	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
105	Install	3	201	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
106	Install	3	205	1590 AAC	1	PS80049	1	T2V1S4N	1	GND210S	4	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
107	Install	3	228	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
108	Install	3	256	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401 NORTH TL**

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by ECE

Started Comp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
109	Install	3	279	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
110	Install	3	244	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
111	Install	3	269	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
112	Install	3	263	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
113	Install	3	270	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
114	Install	3	267	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401 NORTH TL**

Distribution

Transmission

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by ECE

Started Comp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
115	Install	3	280	1590 AAC	1	PS75049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
116	Install	3	292	1590 AAC	1	PS80057	1	T2V1S4N	1	GND210S	3	GUY76DI	2	ANC15THL							@45', 40' BISECT
	Install						1	VC2-1SFBG	1	GNDPS2	1	GUY76DI									
	Install																				
	Install																				
117	Install	3	233	1590 AAC			1	T8F8H3S	2	GND210S	12	GUY76DI	12	ANC15THL					3	IDDEC35B	@50', 45', 40' AHEAD & BACK (EACH POLE)
	Install								2	GNDPS2	3	GUY76DI	2	ANC15THL					6	CALD477	@45', 40' BISECT
	Install																		2	CALD040	23' STEEL DE ARM FOR DISTRIBUTION
	Install																		3	J477AC	16' SEPARATION TRANS. TO DIST.
	Install																		1	J040AC	EXISTING POLE TO REMAIN
	Install																		3	IPIA35	
118	Install	3	676	1590 AAC			1	T8F8H3S	2	GND210S	12	GUY76DI	12	ANC15THS					3	IDDEC35B	@50', 45', 40' AHEAD & BACK (EACH POLE)
	Install								2	GNDPS2									6	CALD477	23' STEEL DE ARM FOR DISTRIBUTION
	Install																		2	CALD040	16' SEPARATION TRANS. TO DIST.
	Install																		3	J477AC	EXISTING POLE TO REMAIN
	Install																		1	J040AC	
	Install																		3	IPIA35	
119	Install				1	PW50C3	1	VC8-1SEC	1	GND210S											SPAN GUYS TO STUB POLE
	Install																				
	Install																				
	Install																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401 NORTH TL**

Distribution

Transmission

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by ECE

Started Comp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
120	Install	3	196	1590 AAC	1	PS80049	1	T1V1F5N	1	GND210S	1	GUY76SI	1	ANC15THL							SPAN GUYS TO STUB POLE
	Install				1	PW40C4	1	VC2-1SFBG	1	GNDPS2	1	GUY76D									@25' BACK (VA5-2)
	Install						1	VA5-2EC													
	Install																				
121	Install	3	247	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S	1	GUY76DI	1	ANC15THL					1	CAGD7#6B	@50' AHEAD (STATIC)
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
122	Install	3	249	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
123	Install	3	249	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
124	Install	3	140	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S	1	GUY76DI	1	ANC15THL					1	STRPBOLT	
	Install				1	PW40C4	1	VC2-1SFBG	1	GNDPS2	1	GUY76D							1	2/0CUEXTRA8FT	
	Install						1	VA5-2EC											1	BKTCOLA1	
	Install																		1	SW1COLB	
125	Install	3	129	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.



Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Job Description

POD 2 TO 401 NORTH TL

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
126	Install	3	268	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
127	Install	3	204	1590 AAC	1	PS80049	1	T1V1F4N	1	GND210S											
	Install						1	VC2-1SFBG	1	GNDPS2											
	Install																				
	Install																				
128	Install	3	187	1590 AAC	1	PS80049	1	T2V1S4N	1	GND210S	4	GUY76SI	2	ANC15THL							SPAN GUYS TO STUB POLE
	Install				1	PW45C3	1	VC2-1SFBG	1	GNDPS2	4	GUY76D									@30', 25' BISECT
	Install																				
	Install																				
129	Install	1	217	7#6 ALUMOWELD	1	PS80049	1	T1V1F4N	1	GND210S											
	Install	3	217	1590 AAC			1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
130	Install	3	214	1590 AAC			1	T4V8S3D	1	GND210S	6	GUY76DI	5	ANC15THS					2	XAM12D	POSSIBLE ENGINEERED STRUCTURE
	Install						1	VC9-2SFBG	1	GNDPS2								6	IDEC35B	@50', 45', 40', 35', 30' BACK	
	Install																	6	CALD477		
	Install																	2	CALD040		
	Install																	3	J477AC		
	Install																	1	J040AC		
	Install																	3	IPIA35		
131	Install	3	50	1590 AAC	1	PS80057	1	T4V8S3N	1	GND210S											
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401 NORTH TL**

Distribution

X

Transmission

X

Estimate

Install

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Installed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by ECE

Started Comp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Install or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
132	Install	3	50	1590 AAC			1	T4V8S3T	1	GND210S	4	GUY76DI	3	ANC15THS							POSSIBLE ENGINEERED STRUCTURE @50', 45', 40' BACK
	Install						1	VC9-2SFBG	1	GNDPS2											
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				
	Install																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
POD 2	Removal																		3	CALD954	
	Removal																				
	Removal																				
	Removal																				
1	Removal	3	161	954AAC	1	PW70C2	1	T1D1S5N													T Pole Double Circuit
	Removal																				
	Removal																				
	Removal																				
2	Removal	3	151	954AAC	1	PW70C2	1	T4V8S3T													
	Removal																				
	Removal																				
	Removal																				
3	Removal	1	204	7#6 ALUMOWELD	1	PW70C2	1	T2V1S4N													
	Removal	3	204	954AAC																	
	Removal																				
	Removal																				
4	Removal	1	202	7#6 ALUMOWELD	1	PW70C2	1	T4V8S3T			4	GUY76D	8	ANC15THL							
	Removal	3	225	954AAC							6	GUY76DI									
	Removal										6	IGUY78									
	Removal																				
5	Removal	1	271	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	271	954AAC																	
	Removal																				
	Removal																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
6	Removal	1	346	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	346	954AAC																	
	Removal																				
	Removal																				
7	Removal	1	350	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	350	954AAC																	
	Removal																				
	Removal																				
8	Removal	1	343	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	343	954AAC																	
	Removal																				
	Removal																				
9	Removal	1	329	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	329	954AAC																	
	Removal																				
	Removal																				
10	Removal	1	327	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	327	954AAC																	
	Removal																				
	Removal																				
11	Removal	1	343	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	343	954AAC																	
	Removal																				
	Removal																				

Page 2 of 21

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401N TL**

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE
PUBLIC WORKS COMMISSION
FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by _____ ECE

Started _____ Comp. _____

Comp. By x

Date Posted to Maps _____

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
12	Removal	1	268	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	268	954AAC																	
	Removal																				
	Removal																				
13	Removal	1	274	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	274	954AAC																	
	Removal																				
	Removal																				
14	Removal	1	339	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	339	954AAC																	
	Removal																				
	Removal																				
15	Removal	1	336	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	336	954AAC																	
	Removal																				
	Removal																				
16	Removal	1	316	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	316	954AAC																	
	Removal																				
	Removal																				
17	Removal	1	324	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	324	954AAC																	
	Removal																				
	Removal																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401N TL**

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE
PUBLIC WORKS COMMISSION
FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started Comp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
18	Removal	1	299	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	299	954AAC																	
	Removal																				
	Removal																				
19	Removal	1	297	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	297	954AAC																	
	Removal																				
	Removal																				
20	Removal	1	295	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	295	954AAC																	
	Removal																				
	Removal																				
21	Removal	1	267	7#6 ALUMOWELD			1	T1V1F4N													
	Removal	3	267	954AAC																	
	Removal																				
	Removal																				
22	Removal	1	309	7#6 ALUMOWELD	2	PW55C3	1	T8F8H3S			3	GUY76S	5	ANC15THL					1	CAGD7#6B	
	Removal	3	309	954AAC	1	40' Stub					3	IGUY78									
	Removal										5	GUY76D									
	Removal																				
23	Removal	1	220	7#6 ALUMOWELD	2	PW60C2	1	T4F8D3N			5	GUY76DI	5	ANC15THL					3	J954AC	
	Removal	3	220	954AAC							10	IGUY78									
	Removal																				
	Removal																				

W.O. #

JOB # 1

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started

Comp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
24	Removal				2	PW45C3	1	T7H8D3S			6	GUY76DI	6	ANC15THL					6	IDDEC25	23' double wood dist arm
	Removal										8	IGUY78							6	CALL477T	
	Removal																		2	CALL040T	
	Removal																		1	XAM12T	
	Removal																		3	J477AC	
	Removal																		1	J040AC	
	Removal																		3	J954AC	
25	Removal	1	104	7#6 ALUMOWELD	2	PW45C3	1	T7H8D3S			4	GUY76DI	4	ANC15THL					6	IDDEC25	23' double wood dist arm
	Removal	3	104	954AAC							4	IGUY78							6	CALL477T	
	Removal										2	IGUY60							2	CALL040T	
	Removal																		1	XAM12T	
	Removal																		3	J477AC	
	Removal																		1	J040AC	
26	Removal	3	262	954AAC	1	PS70042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
27	Removal	3	251	954AAC	1	PS70042	1	T3V7S4N			6	GUY76DI	4	ANC15THL					3	CALL477T	
	Removal						1	VC3EC											1	CALL040T	
	Removal																		3	IDEIL25	
	Removal																				
	Removal																				
	Removal																				
28	Removal	3	242	954AAC	1	PS70042	1	T3V7S4N			4	GUY76DI	4	ANC15THL							
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
	Removal																				
	Removal																				

W.O. #

JOB # 1

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started

Comp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
29	Removal	3	259	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
30	Removal	3	297	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
31	Removal	3	210	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
32	Removal	3	266	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
33	Removal	3	253	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
34	Removal	3	259	954AAC	1	PS75042	1	T3V7S4N			5	GUY76DI	3	ANC15THL							
	Removal						1	VC2-1SFBG			8	IGUY78									
	Removal										1	IGUY60									
	Removal																				

W.O. #

Date

Sub Cir.

MapGridPole No.

Line Sect.

Phase CodeJob Description

POD 2 TO 401N TL

Distribution

Transmission

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
35	Removal	3	271	954AAC	1	PS75042	1	T3V7S4N			5	GUY76DI	3	ANC15THL							
	Removal						1	VC2-1SFBG			8	IGUY78									
	Removal										1	IGUY60									
	Removal																				
36	Removal	3	253	954AAC	1	PW70C2	1	T1V1F4N													
	Removal						1	VC1-1SEC													
	Removal																				
	Removal																				
37	Removal	3	263	954AAC	1	PW70C2	1	T1V1F4N													
	Removal						1	VC1-1SEC													
	Removal																				
	Removal																				
38	Removal	3	261	954AAC	1	PW70C2	1	T1V1F4N													
	Removal						1	VC1-1SEC													
	Removal																				
	Removal																				
39	Removal	3	268	954AAC	1	PW70C2	1	T1V1F4N													
	Removal						1	VC1-1SEC													
	Removal																				
	Removal																				
	Removal																				
40	Removal				1	PW45C3	1	VC9-1SEC													
	Removal																				
	Removal																				
	Removal																				

W.O. #

JOB # 1

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started Comp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
41	Removal	3	238	954AAC	1	PS70042	1	T3V7S4N			4	GUY76SI	3	ANC15THL					3	J477AC	
	Removal				1	PW40C4					1	GUY76S							2	XAF10	
	Removal																		6	CALD477	
	Removal																		2	CALD002	
	Removal																		3	IPIA35	
	Removal																		6	IDDEC25	
42	Removal	3	258	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
43	Removal	3	260	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
44	Removal	3	265	954AAC	1	PS80042	1	T2V1S4N			4	GUY76D	3	ANC15THL							
	Removal				1	PW40C4	1	VC9-2SFBG			4	GUY76S									
	Removal										2	IGUY78									
	Removal																				
45	Removal	3	253	954AAC	1	PS80042	1	T2V1S4N			6	GUY76D	3	ANC15THL							
	Removal				1	PW40C4	1	VC9-2SFBG			2	GUY76DI									
	Removal										2	IGUY78									
	Removal																				
46	Removal	3	253	954AAC	1	PS75042	1	T1V1F4N											1	STRPBOLT	
	Removal						1	VC9-2SFBG											2	CALD002	
	Removal																				
	Removal																				

Page 8 of 21

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401N TL**

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE
PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by ECE

Started Comp.

Comp. By x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
47	Removal	3	267	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
48	Removal	3	261	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
49	Removal	3	252	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
50	Removal	3	259	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
51	Removal	3	250	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
52	Removal	3	262	954AAC	1	PS75042	1	T2V1S4N			1	GUY76D	4	ANC15THL							
	Removal						1	VC9-2SFBG			3	GUY76DI									
	Removal										2	IGUY60									
	Removal																				

Page 9 of 21

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
53	Removal	3	266	954AAC	1	PS75042	1	T2V1S4N			1	GUY76D	4	ANC15THL							
	Removal						1	VC9-2SFBG			3	GUY76DI									
	Removal										2	IGUY60									
	Removal																				
54	Removal	3	247	954AAC	1	PS75042	1	T2V1S4N			1	GUY76D	4	ANC15THL							
	Removal						1	VC9-2SFBG			3	GUY76DI									
	Removal										2	IGUY60									
	Removal																				
55	Removal	3	286	954AAC	1	PS75042	1	T2V1S4N			1	GUY76D	4	ANC15THL							
	Removal						1	VC9-2SFBG			3	GUY76DI									
	Removal										2	IGUY60									
	Removal																				
56	Removal	3	249	954AAC	1	PS75042	1	T2V1S4N			1	GUY76D	4	ANC15THL							
	Removal						1	VC9-2SFBG			3	GUY76DI									
	Removal										2	IGUY60									
	Removal																				
57	Removal	3	274	954AAC	1	PS75042	1	T2V1S4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
58	Removal	3	213	954AAC	1	PS75042	1	T2V1S4N			2	GUY76D	3	ANC15THL							
	Removal						1	VC2-2SEC			2	GUY76DI									
	Removal										2	IGUY78									
	Removal																				

Page 10 of 21

W.O. #

JOB # 1

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

Distribution

Transmission

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
59	Removal	3	299	954AAC	1	PS75042	1	T2V1S4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
60	Removal	3	263	954AAC	1	PS75042	1	T2V1S4N			1	GUY76D	3	ANC15THL							
	Removal						1	VC9-2SFBG			3	GUY76DI									
	Removal										2	IGUY60									
	Removal																				
61	Removal	3	259	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
62	Removal	3	269	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
63	Removal	3	252	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
64	Removal	3	264	954AAC	1	PS75042	1	T2V1S4N			1	GUY76S	3	ANC15THL							
	Removal				1	PW40C4	1	VC9-2SFBG			3	GUY76SI									
	Removal										3	GUY76D									
	Removal																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
65	Removal	3	248	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
66	Removal	3	269	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
67	Removal	3	233	954AAC	1	PS75042	1	T2V1S4N			1	GUY76D	4	ANC15THL							
	Removal						1	VC9-2SFBG			3	GUY76DI									
	Removal										2	IGUY60									
	Removal																				
68	Removal	3	277	954AAC	1	PS75042	1	T2V1S4N			1	GUY76D	4	ANC15THL							
	Removal						1	VC9-2SFBG			3	GUY76DI									
	Removal										3	IGUY60									
	Removal																				
69	Removal	3	275	954AAC	1	PS75042	1	T2V1S4N			1	GUY76D	4	ANC15THL							
	Removal						1	VC9-2SFBG			3	GUY76DI									
	Removal										3	IGUY60									
	Removal																				
70	Removal	3	261	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				

Page 12 of 21

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
71	Removal	3	266	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
72	Removal	3	254	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
73	Removal	3	257	954AAC	1	PS75042	1	T2V1S4N			1	GUY76S	3	ANC15THL							
	Removal				1	PW40C4	1	VC9-2SFBG			3	GUY76SI									
	Removal										4	GUY76D									
	Removal																				
74	Removal	3	258	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
75	Removal	1	254	954AAC	1	PS75042	1	T2V1S4N			1	GUY76S	2	ANC15THL							
	Removal				1	PW40C4	1	VC9-2SFBG			3	GUY76SI									
	Removal										3	GUY76D									
	Removal																				
76	Removal	3	263	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				

Page 13 of 21

W.O. #

JOB # 1

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started

Comp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
77	Removal	3	255	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
78	Removal	3	258	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
79	Removal	3	262	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
80	Removal	3	255	954AAC	1	PW75C2	1	T3V7S4N			1	GUY76D	2	ANC15THL							
	Removal						1	VC9SEC			3	GUY76DI									
	Removal																				
	Removal																				
81	Removal	3	281	954AAC	1	PS75042	1	T2V1S4N			1	GUY76D	3	ANC15THL							
	Removal						1	VC9-2SFBG			3	GUY76DI									
	Removal										2	IGUY60									
	Removal																				
82	Removal	3	259	954AAC	1	PS75049	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started Comp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
83	Removal	3	288	954AAC	1	PW75C2	1	T2V1F4N			3	GUY76SI	2	ANC15THL							
	Removal				1	PW40C4	1	VC2-2SEC			3	GUY76D									
	Removal																				
	Removal																				
84	Removal	3	277	954AAC	1	PW75C2	1	T4V8S3T			1	GUY76S	2	ANC15THL				3	J477AC		
	Removal				1	PW40C4					2	GUY76SI					6	CALD477			
	Removal										3	GUY76D					2	CALD040			
	Removal																1	SW1COLB			
	Removal																1	BKTCOLA1			
	Removal																6	IDDEC25			
	Removal																6	IPIA35			
	Removal																1	J040AC			
	Removal																2	XAF10			
85	Removal	3	289	954AAC	1	PS75042	1	T1V1F4N			1	GUY76S	2	ANC15THL							
	Removal						1	VC9-2SFBG			1	GUY76SI									
	Removal										2	GUY76D1									
	Removal																				
86	Removal	3	154	954AAC	1	PW75C2	1	T1V1F4N													
	Removal						1	VC9-1SEC													
	Removal																				
	Removal																				
87	Removal	3	206	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				

Page 15 of 21

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
88	Removal	3	175	954AAC	1	PW75C2	1	T1V1F4N													
	Removal						1	VC1-1SEC													
	Removal																				
	Removal																				
89	Removal	3	243	954AAC	1	PW80C1	1	T1V1F4N													
	Removal						1	VC1-1SEC													
	Removal																				
	Removal																				
90	Removal	3	277	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
91	Removal	3	278	954AAC	1	PS80042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
92	Removal	3	275	954AAC	1	PS80042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
93	Removal	3	299	954AAC	1	PW80C1	1	T2V1S4N			1	GUY76S	2	ANC15THL							
	Removal				1	PW40C4	1	VC9SEC			3	GUY76SI									
	Removal										3	GUY76D									
	Removal																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

JOB # 1

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
94	Removal	3	244	954AAC	1	PW75C1	1	T1V1F4N													
	Removal						1	VC1-1SEC													
	Removal																				
	Removal																				
95	Removal	3	192	954AAC	1	PW70C1	1	T4V8S3T			1	GUY76S	2	ANC15THL					3	J477AC	
	Removal				1	PW40C4					2	GUY76SI							6	CALD477	
	Removal										2	GUY76D							2	CALD040	
	Removal																		1	SW1COLB	
	Removal																		1	BKTCOLA1	
	Removal																		1	J040AC	
	Removal																		2	XAF10	
96	Removal	3	199	954AAC	1	PW70C1	1	T1V1F4N													
	Removal						1	VC2-2SEC													
	Removal																				
	Removal																				
97	Removal	3	206	954AAC	1	PW70C1	1	T1V1F4N			1	GUY76S	2	ANC15THL							
	Removal				1	PW40C4	1	VC2-2SEC			2	GUY76SI									
	Removal										2	GUY76D									
	Removal																				
98	Removal	3	183	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
99	Removal	3	262	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
100	Removal	3	214	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
101	Removal	3	207	954AAC	1	PS75052	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
102	Removal	3	187	954AAC	1	PS80042	1	T1V1F4N													
	Removal						1	VC9-2SFBG													
	Removal																				
	Removal																				
103	Removal	3	261	954AAC	1	PS85042	1	T4V8S3N			1	GUY76S	10	ANC15THL					2	XAM10	
	Removal				1	PW40C4					5	GUY76SI							6	CALD477	
	Removal										5	GUY76D							2	CALD040	
	Removal										6	GUY76DI							3	J477AC	
	Removal										4	IGUY60							1	J040AC	
	Removal																		3	IPIA35	
104	Removal	3	197	954AAC	1	PS80042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
105	Removal	3	201	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				

W.O. #

JOB # 1

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description

POD 2 TO 401N TL

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
106	Removal	3	201	954AAC	1	PS75042	1	T3V7S4N			1	GUY76D	3	ANC15THL							
	Removal						1	VC2-1SFBG			3	GUY76DI									
	Removal																				
	Removal																				
107	Removal	3	233	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
108	Removal	3	263	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
109	Removal	3	272	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
110	Removal	3	244	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
111	Removal	3	272	954AAC	1	PS75042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description **POD 2 TO 401N TL**

Distribution

X

Transmission

X

Estimate

Removal

FAYETTEVILLE
PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started Comp.

Comp. By **x**

Date Posted to Maps

Pole ID	Type of Work (Transfer, Removal or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
112	Removal	3	254	954AAC	1	PS70042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
113	Removal	3	262	954AAC	1	PS70042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
114	Removal	3	282	954AAC	1	PS70042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
115	Removal	3	280	954AAC	1	PS70042	1	T1V1F4N													
	Removal						1	VC2-1SFBG													
	Removal																				
	Removal																				
116	Removal	3	291	954AAC	1	PS70042	1	T1V1F4N			1	GUY76D	3	ANC15THL							
	Removal						1	VC2-1SFBG			2	GUY76DI									
	Removal																				
	Removal																				
117	Removal	3	233	954AAC															6	CALD954	
	Removal																		3	J954AC	
	Removal																				
	Removal																				

W.O. #	<table border="1"><tr><td></td><td></td><td></td><td></td><td></td></tr></table>						JOB # 1														
Date	<table border="1"><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>																				
<table border="1"><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>																					
Sub Cir.	Map	Grid	Pole No.																		
<table border="1"><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>							<table border="1"><tr><td></td><td></td><td></td><td></td><td></td></tr></table>						<table border="1"><tr><td></td><td></td></tr></table>								
Line Sect.	Phase Code																				
Job Description	<u>POD 2 TO 40IN T</u>																				

Distribution	☒
Transmission	☒
Estimate	☐
Removal	

FAYETTEVILLE
PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Removed			
Lights Retired			
Tax Code			
% Retired			
Crew No.			

Staked by	ECE
Started	Comp.
Comp. By	<u>x</u>
Date Posted to Maps	

[illegible]

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE
PUCLIC WORKS COMMISSION
FAYETTEVILLE, NC
Staking SheetLights TransferredLights RetiredTax Code% RetiredCrew No.Staked by

ECE

StartedComp.Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
1	Transfer	1	155	7#6 ALUMOWELD																	
	Transfer																				
	Transfer																				
	Transfer																				
2	Transfer	1	155	7#6 ALUMOWELD																	
	Transfer																				
	Transfer																				
	Transfer																				
3	Transfer	1	204	7#6 ALUMOWELD																	
	Transfer																				
	Transfer																				
	Transfer																				
4	Transfer	1	202	7#6 ALUMOWELD																	
	Transfer																				
	Transfer																				
	Transfer																				
5	Transfer	1	271	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
6	Transfer	1	346	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
7	Transfer	1	351	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
8	Transfer	1	343	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
9	Transfer	1	329	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
10	Transfer	1	328	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
11	Transfer	1	343	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
12	Transfer	1	268	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
13	Transfer	1	274	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
14	Transfer	1	338	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
15	Transfer	1	337	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
16	Transfer	1	315	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
17	Transfer	1	324	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
18	Transfer	1	299	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				

Page 3 of 23

W.O. #

JOB # 1

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Distribution

☒

Transmission

☒

Estimate

☐

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started

Comp.

Comp. By

x

Date Posted to Maps

Job Description

Murchison Rd NCDOT Relocation

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
19	Transfer	1	297	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
20	Transfer	1	295	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
21	Transfer	1	267	7#6 ALUMOWELD	1	PS70042															
	Transfer																				
	Transfer																				
	Transfer																				
22	Transfer	1	307	7#6 ALUMOWELD																	
	Transfer																				
	Transfer																				
	Transfer																				
23	Transfer	1	220	7#6 ALUMOWELD																	
	Transfer																				
	Transfer																				
	Transfer																				
24	Transfer	1	271	7#6 ALUMOWELD																	
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
25	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
26	Transfer	1	262	7#6 ALUMOWELD														1	BKTCOLA1		
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
27	Transfer	3	250	477 AAC																	
	Transfer	1	250	4/0 AAAC																	
	Transfer	1	250	7#6 ALUMOWELD																	
	Transfer																				
28	Transfer	3	242	477 AAC														2	XAF10	V PHASE TAP	
	Transfer	1	242	4/0 AAAC														2	IDDEC35B	TAP TO UG	
	Transfer	1	242	7#6 ALUMOWELD														3	CALD002		
	Transfer																	2	STRPBOLT		
	Transfer																	2	SW1COLB		
	Transfer																	1	BKTCOLA3		
	Transfer																	1	1/0EXTRADIP30		
	Transfer																	1	DIP230P		
	Transfer																	1	LA10RP		

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Distribution

☒

Transmission

☒

Estimate

☐

Transfer

FAYETTEVILLE

PUCLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

☐

Lights Retired

☐

Tax Code

% Retired

Crew No.

Staked by ECE

Started Comp.

Comp. By X

Date Posted to Maps

Job Description Murchison Rd NCDOT Relocation

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
29	Transfer	3	277	477 AAC																	
	Transfer	1	277	4/0 AAAC																	
	Transfer	1	277	7#6 ALUMOWELD																	
	Transfer																				
30	Transfer	3	279	477 AAC			1	VA5-2EC							1	T25S1A			1	STRPBOLT	
	Transfer	1	279	4/0 AAAC														1	SW1COLB		
	Transfer	1	279	7#6 ALUMOWELD														1	BKTCOLA1		
	Transfer																	3	UGARD3		
	Transfer																	1	CAST02TB		
31	Transfer	3	210	477 AAC														1	STRPBOLT	SINGLE-PHASE TAP	
	Transfer	1	210	4/0 AAAC														1	SW1COLB	UG PRI. DIP	
	Transfer	1	210	7#6 ALUMOWELD														1	BKTCOLA1		
	Transfer																	1	1/0EXTRADIP30		
	Transfer																	1	2/0CUEXTRA8FT		
	Transfer																	1	LA10RP		
	Transfer																	1	DIP230P		
32	Transfer	3	267	477 AAC											1	T25S1A			1	STRPBOLT	
	Transfer	1	267	4/0 AAAC											1	T10S1A			1	2/0CUEXTRA8FT	
	Transfer	1	267	7#6 ALUMOWELD														1	CC1SMF		
	Transfer																	1	BKTCOLA1		
	Transfer																	1	LA10RP		
	Transfer																	1	CAST02TB		
33	Transfer	3	252	477 AAC																	
	Transfer	1	252	4/0 AAAC																	
	Transfer	1	252	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
34	Transfer	3	259	477 AAC																	
	Transfer	1	259	4/0 AAAC																	
	Transfer	1	259	7#6 ALUMOWELD																	
	Transfer																				
35	Transfer	3	271	477 AAC											1	T25S1A			1	STRPBOLT	
	Transfer	1	271	4/0 AAAC															1	SW1COLB	
	Transfer	1	271	7#6 ALUMOWELD															1	BKTCOLA1	
	Transfer																		1	CAST02TB	
36	Transfer	3	253	477 AAC											1	T25S1A			2	XAF10	
	Transfer	1	253	4/0 AAAC															2	IDEC35B	
	Transfer	1	253	7#6 ALUMOWELD															3	CALD002	
	Transfer																		2	STRPBOLT	
	Transfer																		2	2/0CUEXTRA8FT	
	Transfer																		2	SW1COLB	
	Transfer																		1	CC1SMF	
	Transfer																		3	J002AC	
	Transfer																		1	L50E5M1P	
	Transfer																		2	BKTCOLA1	
37	Transfer	3	264	477 AAC											1	T10S1A			3	STRPBOLT	
	Transfer	1	264	4/0 AAAC															3	2/0CUEXTRA8FT	
	Transfer	1	264	7#6 ALUMOWELD															1	BKTCOLA3	
	Transfer																		3	SW1COLB	
	Transfer																		1	CB450D25	
38	Transfer	3	260	477 AAC																	
	Transfer	1	260	4/0 AAAC																	
	Transfer	1	260	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
39	Transfer	3	268	477 AAC																	
	Transfer	1	268	4/0 AAAC																	
	Transfer	1	268	7#6 ALUMOWELD																	
	Transfer																				
40	Transfer	3	157	477 AAC																	
	Transfer	1	157	4/0 AAAC																	
	Transfer																				
	Transfer																				
41	Transfer	3	80	477 AAC																	
	Transfer	1	80	4/0 AAAC																	
	Transfer	1	237	7#6 ALUMOWELD																	
	Transfer																				
42	Transfer	3	258	477 AAC																	
	Transfer	1	258	4/0 AAAC																	
	Transfer	1	258	7#6 ALUMOWELD																	
	Transfer																				
43	Transfer	3	260	477 AAC																	
	Transfer	1	260	4/0 AAAC																	
	Transfer	1	260	7#6 ALUMOWELD																	
	Transfer																				
44	Transfer	3	265	477 AAC																	
	Transfer	1	265	4/0 AAAC																	
	Transfer	1	265	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUCLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started Comp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
45	Transfer	3	253	477 AAC			1	VA5-2EC											1	STRPBOLT	
	Transfer	1	253	4/0 AAAC															1	2/0CUEXTRA8FT	
	Transfer	1	253	7#6 ALUMOWELD															1	BKTCOLA1	
	Transfer																		1	LA10RP	
	Transfer																		1	SW1COLB	
46	Transfer	3	253	477 AAC																	
	Transfer	1	253	4/0 AAAC																	
	Transfer	1	253	7#6 ALUMOWELD																	
	Transfer																				
47	Transfer	3	267	477 AAC																	
	Transfer	1	267	4/0 AAAC																	
	Transfer	1	267	7#6 ALUMOWELD																	
	Transfer																				
48	Transfer	3	260	477 AAC																	
	Transfer	1	260	4/0 AAAC																	
	Transfer	1	260	7#6 ALUMOWELD																	
	Transfer																				
49	Transfer	3	249	477 AAC																	
	Transfer	1	249	4/0 AAAC																	
	Transfer	1	249	7#6 ALUMOWELD																	
	Transfer																				
50	Transfer	3	258	477 AAC																	
	Transfer	1	258	4/0 AAAC																	
	Transfer	1	258	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
51	Transfer	3	255	477 AAC																	
	Transfer	1	255	4/0 AAAC																	
	Transfer	1	255	7#6 ALUMOWELD																	
	Transfer																				
52	Transfer	3	262	477 AAC																	
	Transfer	1	262	4/0 AAAC																	
	Transfer	1	262	7#6 ALUMOWELD																	
	Transfer																				
53	Transfer	3	266	477 AAC																	
	Transfer	1	266	4/0 AAAC																	
	Transfer	1	266	7#6 ALUMOWELD																	
	Transfer																				
54	Transfer	3	247	477 AAC																	
	Transfer	1	247	4/0 AAAC																	
	Transfer	1	247	7#6 ALUMOWELD																	
	Transfer																				
55	Transfer	3	286	477 AAC																	
	Transfer	1	286	4/0 AAAC																	
	Transfer	1	286	7#6 ALUMOWELD																	
	Transfer																				
56	Transfer	3	249	477 AAC																	
	Transfer	1	249	4/0 AAAC																	
	Transfer	1	249	7#6 ALUMOWELD																	
	Transfer																				

Page 10 of 23

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUCLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
57	Transfer	3	243	477 AAC																	
	Transfer	1	243	4/0 AAAC																	
	Transfer	1	243	7#6 ALUMOWELD																	
	Transfer																				
58	Transfer	3	245	477 AAC															2	XAF10	
	Transfer	1	245	4/0 AAAC															3	IDEC35B	
	Transfer	1	245	7#6 ALUMOWELD															4	CALD002	
	Transfer																		3	STRPBOLT	
	Transfer																		3	BKTCOLA1	
	Transfer																		3	SW1COLB	
59	Transfer	3	289	477 AAC																	
	Transfer	1	289	4/0 AAAC																	
	Transfer	1	289	7#6 ALUMOWELD																	
	Transfer																				
60	Transfer	3	274	477 AAC																	
	Transfer	1	274	4/0 AAAC																	
	Transfer	1	274	7#6 ALUMOWELD																	
	Transfer																				
61	Transfer	3	258	477 AAC															1	BKTCOLA3	
	Transfer	1	258	4/0 AAAC															3	LA10RP	
	Transfer	1	258	7#6 ALUMOWELD															3	STRPBOLT	
	Transfer																		3	2/0CUEXTRA8FT	
62	Transfer	3	264	477 AAC																	
	Transfer	1	264	4/0 AAAC																	
	Transfer	1	264	7#6 ALUMOWELD																	
	Transfer																				

Page 11 of 23

W.O. #

JOB # 1

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

Transmission

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

x

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
63	Transfer	3	258	477 AAC																	
	Transfer	1	258	4/0 AAAC																	
	Transfer	1	258	7#6 ALUMOWELD																	
	Transfer																				
64	Transfer	3	264	477 AAC																	
	Transfer	1	264	4/0 AAAC																	
	Transfer	1	264	7#6 ALUMOWELD																	
	Transfer																				
65	Transfer	3	248	477 AAC																	
	Transfer	1	248	4/0 AAAC																	
	Transfer	1	248	7#6 ALUMOWELD																	
	Transfer																				
66	Transfer	3	269	477 AAC																	
	Transfer	1	269	4/0 AAAC																	
	Transfer	1	269	7#6 ALUMOWELD																	
	Transfer																				
67	Transfer	3	227	477 AAC																	
	Transfer	1	227	4/0 AAAC																	
	Transfer	1	227	7#6 ALUMOWELD																	
	Transfer																				
68	Transfer	3	278	477 AAC																	
	Transfer	1	278	4/0 AAAC																	
	Transfer	1	278	7#6 ALUMOWELD																	
	Transfer																				

W.O. #						JOB # 1
Date						
Sub Cir.	Map	Grid	Pole No.			
Line Sect.	Phase Code					
Job Description	<u>Murchison Rd NCL</u>					

Distribution	☒
Transmission	☒
Estimate	☐
Transfer	

FAYETTEVILLE
PUBLIC WORKS COMMISSION
FAYETTEVILLE, NC

Lights Transferred			
Lights Retired			
Tax Code			
% Retired			
Crew No.			

Staked by	_____ ECE
Started	_____ Comp. _____
Comp. By	_____ <u>x</u>
Date Posted to Maps	_____

Staking Sheet

[illegible]

W.O. #

JOB # 1

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started Comp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
75	Transfer	3	254	477 AAC																	
	Transfer	1	254	4/0 AAAC																	
	Transfer	1	254	7#6 ALUMOWELD																	
	Transfer																				
76	Transfer	3	263	477 AAC																	
	Transfer	1	263	4/0 AAAC																	
	Transfer	1	263	7#6 ALUMOWELD																	
	Transfer																				
77	Transfer	3	255	477 AAC																	
	Transfer	1	255	4/0 AAAC																	
	Transfer	1	255	7#6 ALUMOWELD																	
	Transfer																				
78	Transfer	3	258	477 AAC																	
	Transfer	1	258	4/0 AAAC																	
	Transfer	1	258	7#6 ALUMOWELD																	
	Transfer																				
79	Transfer	3	262	477 AAC																	
	Transfer	1	262	4/0 AAAC																	
	Transfer	1	262	7#6 ALUMOWELD																	
	Transfer																				
80	Transfer	3	255	477 AAC																	
	Transfer	1	255	4/0 AAAC																	
	Transfer	1	255	7#6 ALUMOWELD																	
	Transfer																				

Page 14 of 23

W.O. #

JOB # 1

Date

Sub Cir. Map Grid Pole No.

Line Sect. Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

Transmission

Estimate

Transfer

FAYETTEVILLE

PUCLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started Comp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
81	Transfer	3	281	477 AAC																	
	Transfer	1	281	4/0 AAAC																	
	Transfer	1	281	7#6 ALUMOWELD																	
	Transfer																				
82	Transfer	3	259	477 AAC																	
	Transfer	1	259	4/0 AAAC																	
	Transfer	1	259	7#6 ALUMOWELD																	
	Transfer																				
83	Transfer	3	288	477 AAC																	
	Transfer	1	288	4/0 AAAC																	
	Transfer	1	288	7#6 ALUMOWELD																	
	Transfer																				
84	Transfer	3	277	477 AAC																	
	Transfer	1	277	4/0 AAAC																	
	Transfer	1	277	7#6 ALUMOWELD																	
	Transfer																				
85	Transfer	3	289	477 AAC																	
	Transfer	1	289	4/0 AAAC																	
	Transfer	1	289	7#6 ALUMOWELD																	
	Transfer																				
86	Transfer	3	154	477 AAC																	
	Transfer	1	154	4/0 AAAC																	
	Transfer	1	154	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Job # 1

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

Started

Comp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
87	Transfer	3	206	477 AAC																	
	Transfer	1	206	4/0 AAAC																	
	Transfer	1	206	7#6 ALUMOWELD																	
	Transfer																				
88	Transfer	3	175	477 AAC			1	VA5-2EC										1	STRPBOLT		
	Transfer	1	175	4/0 AAAC														1	SWICOLB		
	Transfer	1	175	7#6 ALUMOWELD														1	BKTCOLA1		
	Transfer																	1	2/0CUEXTRA8FT		
89	Transfer	3	243	477 AAC																	
	Transfer	1	243	4/0 AAAC																	
	Transfer	1	243	7#6 ALUMOWELD																	
	Transfer																				
90	Transfer	3	277	477 AAC																	
	Transfer	1	277	4/0 AAAC																	
	Transfer	1	277	7#6 ALUMOWELD																	
	Transfer																				
91	Transfer	3	277	477 AAC																	
	Transfer	1	277	4/0 AAAC																	
	Transfer	1	277	7#6 ALUMOWELD																	
	Transfer																				
92	Transfer	3	276	477 AAC																	
	Transfer	1	276	4/0 AAAC																	
	Transfer	1	276	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
93	Transfer	3	298	477 AAC																	
	Transfer	1	298	4/0 AAAC																	
	Transfer	1	298	7#6 ALUMOWELD																	
	Transfer																				
94	Transfer	3	219	477 AAC																	
	Transfer	1	219	4/0 AAAC																	
	Transfer	1	219	7#6 ALUMOWELD																	
	Transfer																				
95	Transfer	3	217	477 AAC																	
	Transfer	1	217	4/0 AAAC																	
	Transfer	1	217	7#6 ALUMOWELD																	
	Transfer																				
96	Transfer	3	216	477 AAC																	
	Transfer	1	216	4/0 AAAC																	
	Transfer	1	216	7#6 ALUMOWELD																	
	Transfer																				
97	Transfer	3	189	477 AAC																	
	Transfer	1	189	4/0 AAAC																	
	Transfer	1	189	7#6 ALUMOWELD																	
	Transfer																				
98	Transfer	3	224	477 AAC																	
	Transfer	1	224	4/0 AAAC																	
	Transfer	1	224	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
99	Transfer	3	220	477 AAC																	
	Transfer	1	220	4/0 AAAC																	
	Transfer	1	220	7#6 ALUMOWELD																	
	Transfer																				
100	Transfer	3	214	477 AAC																	
	Transfer	1	214	4/0 AAAC																	
	Transfer	1	214	7#6 ALUMOWELD																	
	Transfer																				
101	Transfer	3	206	477 AAC																	
	Transfer	1	206	4/0 AAAC																	
	Transfer	1	206	7#6 ALUMOWELD																	
	Transfer																				
102	Transfer	3	193	477 AAC																	
	Transfer	1	193	4/0 AAAC																	
	Transfer	1	193	7#6 ALUMOWELD																	
	Transfer																				
103	Transfer	3	256	477 AAC																	
	Transfer	1	256	4/0 AAAC																	
	Transfer	1	256	7#6 ALUMOWELD																	
	Transfer																				
104	Transfer	3	197	477 AAC																	
	Transfer	1	197	4/0 AAAC																	
	Transfer	1	197	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
105	Transfer	3	201	477 AAC																	
	Transfer	1	201	4/0 AAAC																	
	Transfer	1	201	7#6 ALUMOWELD																	
	Transfer																				
106	Transfer	3	205	477 AAC																	
	Transfer	1	205	4/0 AAAC																	
	Transfer	1	205	7#6 ALUMOWELD																	
	Transfer																				
107	Transfer	3	228	477 AAC																	
	Transfer	1	228	4/0 AAAC																	
	Transfer	1	228	7#6 ALUMOWELD																	
	Transfer																				
108	Transfer	3	256	477 AAC																	
	Transfer	1	256	4/0 AAAC																	
	Transfer	1	256	7#6 ALUMOWELD																	
	Transfer																				
109	Transfer	3	279	477 AAC																	
	Transfer	1	279	4/0 AAAC																	
	Transfer	1	279	7#6 ALUMOWELD																	
	Transfer																				
110	Transfer	3	244	477 AAC																	
	Transfer	1	244	4/0 AAAC																	
	Transfer	1	244	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
111	Transfer	3	269	477 AAC																	
	Transfer	1	269	4/0 AAAC																	
	Transfer	1	269	7#6 ALUMOWELD																	
	Transfer																				
112	Transfer	3	263	477 AAC																	
	Transfer	1	263	4/0 AAAC																	
	Transfer	1	263	7#6 ALUMOWELD																	
	Transfer																				
113	Transfer	3	270	477 AAC																	
	Transfer	1	270	4/0 AAAC																	
	Transfer	1	270	7#6 ALUMOWELD																	
	Transfer																				
114	Transfer	3	267	477 AAC																	
	Transfer	1	267	4/0 AAAC																	
	Transfer	1	267	7#6 ALUMOWELD																	
	Transfer																				
115	Transfer	3	280	477 AAC																	
	Transfer	1	280	4/0 AAAC																	
	Transfer	1	280	7#6 ALUMOWELD																	
	Transfer																				
116	Transfer	3	292	477 AAC																	
	Transfer	1	292	4/0 AAAC																	
	Transfer	1	292	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
117	Transfer	3	233	477 AAC	1	PS85057															
	Transfer	1	233	4/0 AAAC																	
	Transfer	1	233	7#6 ALUMOWELD																	
	Transfer																				
118	Transfer	3	676	477 AAC	1	PS85057															
	Transfer	1	676	4/0 AAAC																	
	Transfer	1	676	7#6 ALUMOWELD																	
	Transfer																				
119	Transfer	3	95	477 AAC														6	STRPBOLT		
	Transfer	1	95	4/0 AAAC														1	SW6GOABH		
	Transfer																				
	Transfer																				
120	Transfer	3	100	477 AAC														1	STRPBOLT		
	Transfer	1	100	4/0 AAAC														1	2/0CUEXTRA8FT		
	Transfer	1	195	7#6 ALUMOWELD														1	BKTCOLA1		
	Transfer																	1	SW1COLB		
121	Transfer	3	247	477 AAC																	
	Transfer	1	247	4/0 AAAC																	
	Transfer	1	247	7#6 ALUMOWELD																	
	Transfer																				
122	Transfer	3	249	477 AAC																	
	Transfer	1	249	4/0 AAAC																	
	Transfer	1	249	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE

PUBLIC WORKS COMMISSION

FAYETTEVILLE, NC

Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by

ECE

StartedComp.

Comp. By

X

Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
123	Transfer	3	249	477 AAC																	
	Transfer	1	249	4/0 AAAC																	
	Transfer	1	249	7#6 ALUMOWELD																	
	Transfer																				
124	Transfer	3	140	477 AAC														1	STRPBOLT		
	Transfer	1	140	4/0 AAAC														1	2/0CUEXTRA8FT		
	Transfer	1	140	7#6 ALUMOWELD														1	BKTCOLA1		
	Transfer																	1	SW1COLB		
125	Transfer	3	129	477 AAC																	
	Transfer	1	129	4/0 AAAC																	
	Transfer	1	129	7#6 ALUMOWELD																	
	Transfer																				
126	Transfer	3	268	477 AAC																	
	Transfer	1	268	4/0 AAAC																	
	Transfer	1	268	7#6 ALUMOWELD																	
	Transfer																				
127	Transfer	3	204	477 AAC																	
	Transfer	1	204	4/0 AAAC																	
	Transfer	1	204	7#6 ALUMOWELD																	
	Transfer																				
128	Transfer	3	187	477 AAC																	
	Transfer	1	187	4/0 AAAC																	
	Transfer	1	187	7#6 ALUMOWELD																	
	Transfer																				

W.O. #

Date

Sub Cir.

Map

Grid

Pole No.

Line Sect.

Phase Code

Job Description

Murchison Rd NCDOT Relocation

Distribution

X

Transmission

X

Estimate

Transfer

FAYETTEVILLE
PUCLIC WORKS COMMISSION
FAYETTEVILLE, NC
Staking Sheet

Lights Transferred

Lights Retired

Tax Code

% Retired

Crew No.

Staked by ECE
Started Comp.
Comp. By X
Date Posted to Maps

Pole ID	Type of Work (Transfer, Transfer or Removal)	CONDUCTOR AND CONDUIT			POLE		STRUCTURE ASSEMBLY		POLE GROUND		GUY		ANCHOR		TRANSFORMER		SEC / SVS		MISC. & URD		NOTES AND REMARKS
		No. Wires	Back Span	Wire Size	QTY	H/C	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	QTY	UNIT	
129	Transfer	3	217	477 AAC																	
	Transfer	1	217	4/0 AAAC																	
	Transfer	1	217	7#6 ALUMOWELD																	
	Transfer																				
130	Transfer	3	214	477 AAC																	
	Transfer	1	214	4/0 AAAC																	
	Transfer	1	214	7#6 ALUMOWELD																	
	Transfer																				
131	Transfer	3	50	477 AAC														1	SW12V69LUNIT7		
	Transfer	1	50	4/0 AAAC																	
	Transfer	1	50	7#6 ALUMOWELD																	
	Transfer																				
132	Transfer	3	50	477 AAC																	
	Transfer	1	50	4/0 AAAC																	
	Transfer	1	50	7#6 ALUMOWELD																	
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				
	Transfer																				

Page 23 of 23